


AMPTRON INTERNATIONAL, INC.

P M - 7 6 0 0 A

Processor	Pentium
Processor Speed	75/90/100/120/133MHz
Chip Set	Intel
Max. Onboard DRAM	128MB
Cache	256/512KB
BIOS	Award
Dimensions	254mm x 218mm
I/O Options	32-bit PCI slots (3), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, serial ports (2) VRM connector, cache slot
NPU Options	None

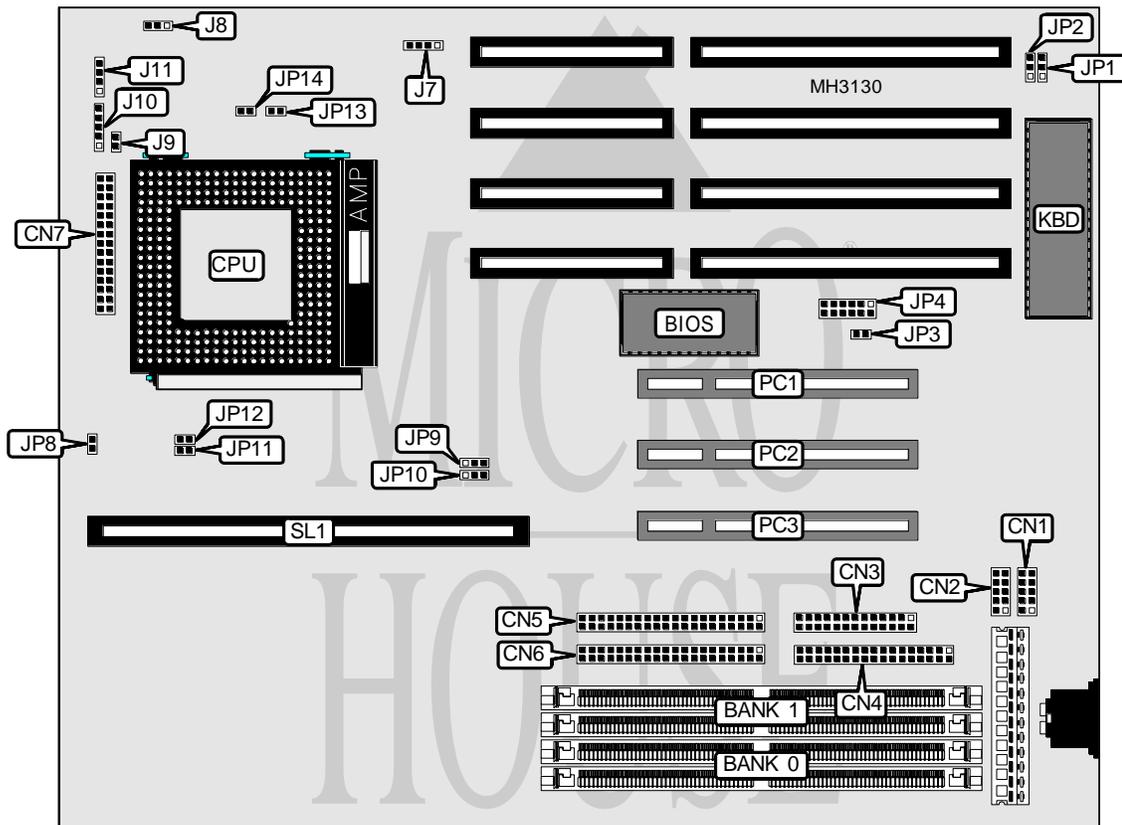

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	CN1	Reset switch	J9
Serial port 2	CN2	Power LED & keylock	J10
Parallel port	CN3	Speaker	J11
Floppy drive interface	CN4	IDE interface LED	JP8
IDE interface 2	CN5	Green PC connector	JP9
IDE interface 1	CN6	32-bit PCI slots	PCI - PC3
VRM connector	CN7	Cache slot	SL1
External battery	J7		

Continued on next page. . .

AMPTRON INTERNATIONAL, INC.

PM - 7600A

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Battery type select external	J7	Closed
Battery type select internal	J7	pins 2 & 3 closed
CMOS memory clear	J7	pins 3 & 4 closed
í Flash BIOS voltage select 5v	JP3	Open
Flash BIOS voltage select 12v	JP3	Closed
í Factory configured - do not alter	JP4	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 512K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
6MB	(2) 512K x 36	(2) 256K x 36
6MB	(2) 256K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
8MB	(2) 512K x 36	(2) 512K x 36
10MB	(2) 1M x 36	(2) 256K x 36
10MB	(2) 256K x 36	(2) 1M x 36
12MB	(2) 1M x 36	(2) 512K x 36
12MB	(2) 512K x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
16MB	(2) 1M x 36	(2) 1M x 36
18MB	(2) 2M x 36	(2) 256K x 36
18MB	(2) 256K x 36	(2) 2M x 36
20MB	(2) 2M x 36	(2) 512K x 36
20MB	(2) 512K x 36	(2) 2M x 36
24MB	(2) 2M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
32MB	(2) 2M x 36	(2) 2M x 36
34MB	(2) 4M x 36	(2) 256K x 36
34MB	(2) 256K x 36	(2) 4M x 36
36MB	(2) 4M x 36	(2) 512K x 36
36MB	(2) 512K x 36	(2) 4M x 36
40MB	(2) 4M x 36	(2) 1M x 36
40MB	(2) 1M x 36	(2) 4M x 36
48MB	(2) 4M x 36	(2) 2M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
64MB	(2) 4M x 36	(2) 4M x 36
66MB	(2) 8M x 36	(2) 256K x 36
66MB	(2) 256K x 36	(2) 8M x 36
68MB	(2) 8M x 36	(2) 512K x 36
68MB	(2) 512K x 36	(2) 8M x 36

Continued on next page...

AMPTRON INTERNATIONAL, INC.

PM-7600A

... continued from previous page

DRAM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
72MB	(2) 8M x 36	(2) 1M x 36
72MB	(2) 1M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 2M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION	
Size	SL1
256KB	Installed
512KB	Installed

Note: Cache module can either be an asynchronous module or a pipeline burst module.

CPU CLOCK SPEED CONFIGURATION				
Speed	Clock speed	JP10	JP11	JP12
50MHz	PCI clock /3	pins 2 & 3 closed	Closed	Closed
60MHz	PCI clock /4	pins 1 & 2 closed	Open	Closed
66MHz	PCI clock /4	pins 1 & 2 closed	Closed	Open

CPU INTERNAL CLOCK SPEED CONFIGURATION		
Speed	JP13	JP14
1.5x	Open	Open
2x	Closed	Open
2.5x	Closed	Closed
3x	Open	Closed

CPU VOLTAGE CONFIGURATION	
DMA	J8
3.5v	pins 1 & 2 closed
3.3v	pins 2 & 3 closed

DMA CONFIGURATION		
DMA	JP1	JP2
1 DMA	pins 1 & 2 closed	pins 1 & 2 closed
DMA 3	pins 2 & 3 closed	pins 2 & 3 closed