


UNIDENTIFIED 386 MOTHERBOARD

Processor	80386SX
Processor Speed	16/25MHz
Chip Set	C & T
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	254mm x 218mm
I/O Options	32-bit external memory cards (2)
NPU Options	80287/80387SX/3167 (location of the 80287 is unidentified)

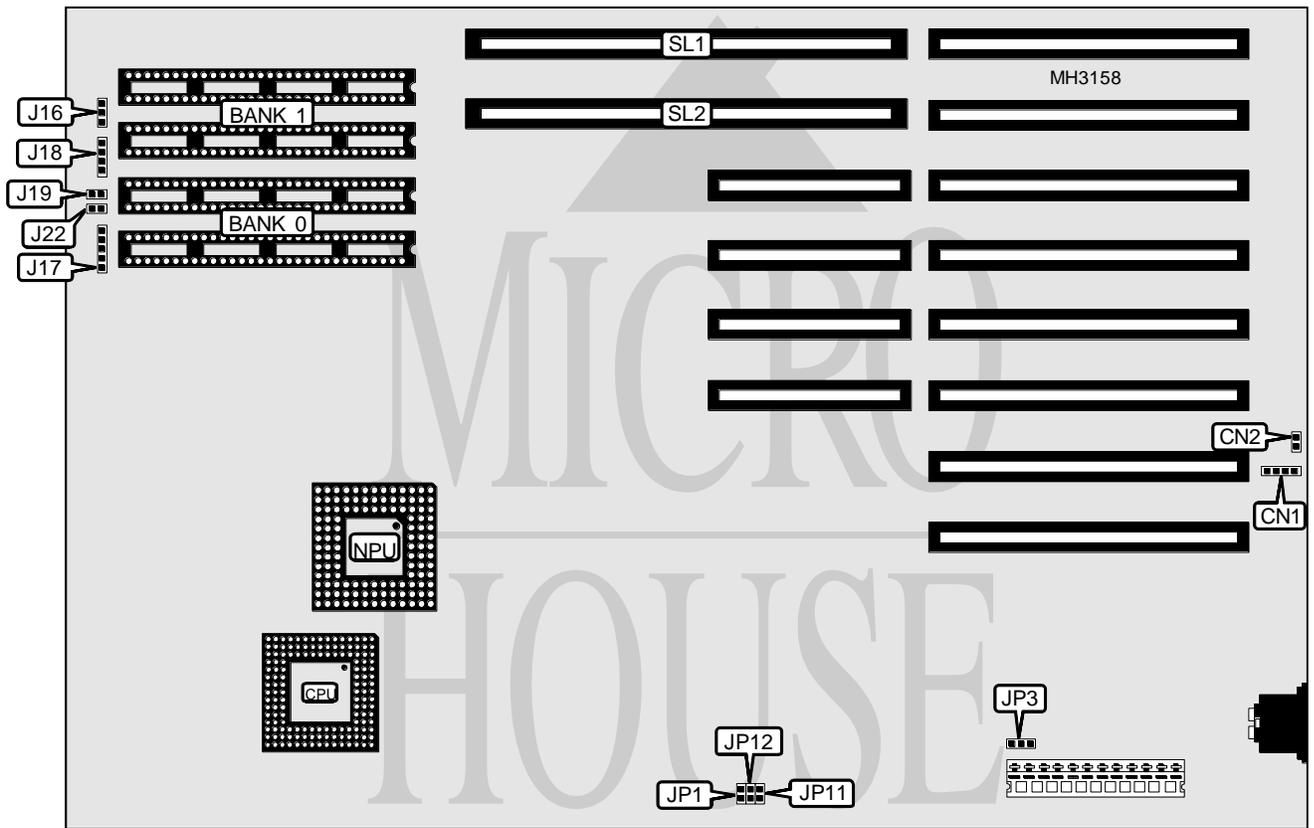

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	CN1	Reset switch	J19
Turbo switch	J16	Turbo LED	J22
Power LED & keylock	J17	32-bit system memory cards	SL1 & SL2
Speaker	J18		

Continued on next page. . .

UNIDENTIFIED 386 MOTHERBOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	CN2	N/A
80287 not installed	JP1	Open
80287 installed	JP1	Closed
Monitor type select color	JP3	pins 1 & 2 closed
Monitor type select monochrome	JP3	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9

NPU TYPE CONFIGURATION (80387/WEITEK ONLY)		
Setting	JP11	JP12
NPU not installed	Open	Open
NPU installed	Closed	Closed

MISCELLANEOUS TECHNICAL NOTE
Note: The location of pin 1 is unidentified.