


ASICOM, INC. LEXAR 600T

Processor	Pentium
Processor Speed	75/90/100/120/133/150/166/180/200MHz
Chip Set	Unidentified
Max. Onboard DRAM	128MB
Cache	256/512KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), , parallel port, PS/2 mouse interface, serial ports (2), VRM connector, cache slot, legacy connector
NPU Options	None

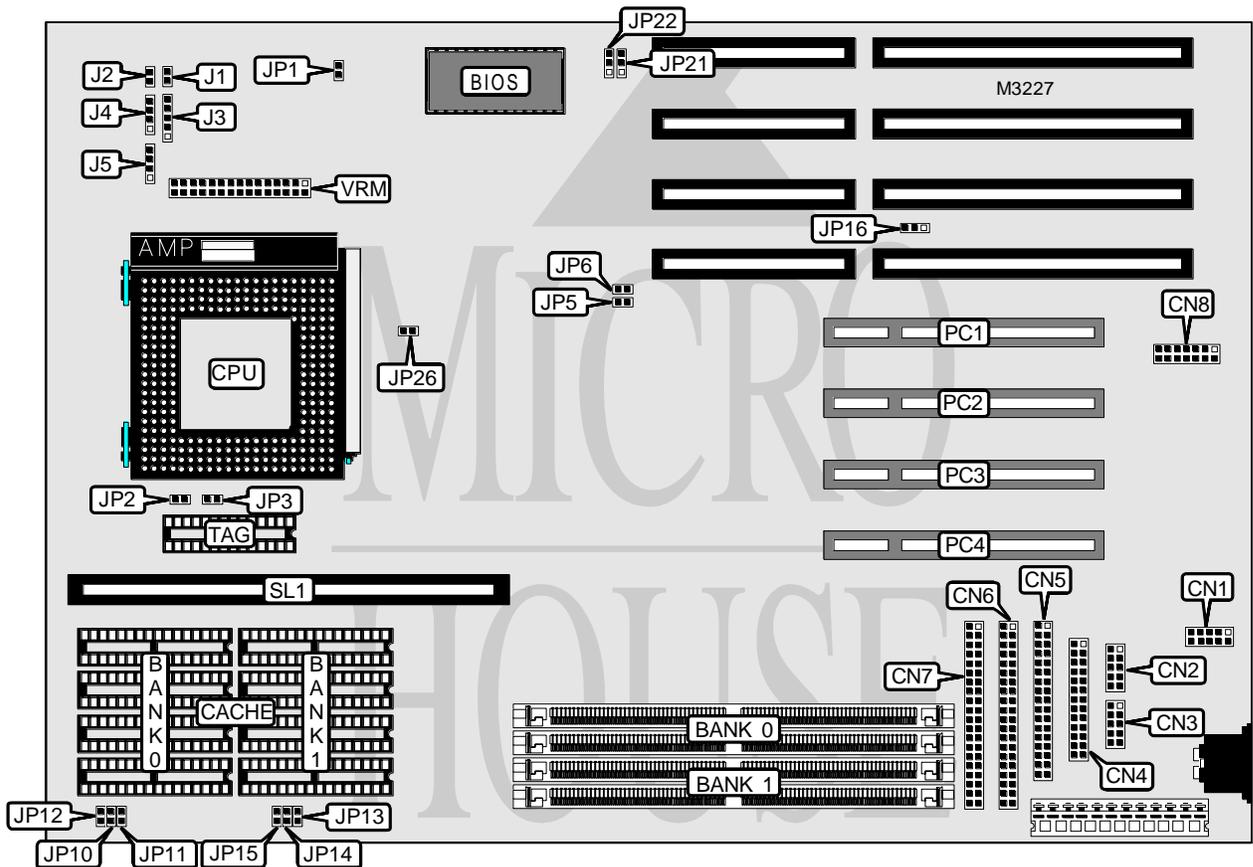

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse interface	CN1	Instant on connector	J1
Serial port 1	CN2	Reset switch	J2
Serial port 2	CN3	Power LED & keylock	J3
Parallel port	CN4	IDE interface LED	J4
Floppy drive interface	CN5	Speaker	J5
IDE interface 2	CN6	32-bit PCI slots	PC1 - PC4
IDE interface 1	CN7	Cache slot	SL1
Legacy connector	CN8	VRM connector	VRM

Continued on next page. . .

ASICOM, INC.

LEXAR 600T

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU external clock speed select 1/8	JP16	Pins 2 & 3 closed
CPU external clock speed select 1/6	JP16	Pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	None	(2) 1M x 32
8MB	(2) 512K x 32	(2) 512K x 32
16MB	None	(2) 2M x 32
16MB	(2) 1M x 32	(2) 1M x 32
24MB	(2) 1M x 32	(2) 2M x 32
24MB	(2) 2M x 32	(2) 1M x 32
32MB	None	(2) 4M x 32
32MB	(2) 2M x 32	(2) 2M x 32
40MB	(2) 1M x 32	(2) 4M x 32
40MB	(2) 4M x 32	(2) 1M x 32
48MB	(2) 2M x 32	(2) 4M x 32
48MB	(2) 4M x 32	(2) 2M x 32
64MB	None	(2) 8M x 32
64MB	(2) 4M x 32	(2) 4M x 32
72MB	(2) 1M x 32	(2) 8M x 32
72MB	(2) 8M x 32	(2) 1M x 32
80MB	(2) 2M x 32	(2) 8M x 32
80MB	(2) 8M x 32	(2) 2M x 32
96MB	(2) 4M x 32	(2) 8M x 32
96MB	(2) 8M x 32	(2) 4M x 32
128MB	(2) 8M x 32	(2) 8M x 32

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG	SL1
256KB (A)	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8	Not installed
256KB (B)	None	None	None	Installed
512KB (A)	(4) 64K x 8	(4) 64K x 8	(1) 32K x 8	Not installed
512KB (B)	None	None	None	Installed

CACHE JUMPER CONFIGURATION	
Size	JP26
256KB (A)	Open
512KB (A)	Closed

Continued on next page...

ASICOM, INC.
LEXAR 600T

... continued from previous page

CACHE CONFIGURATION						
Type	JP10	JP11	JP12	JP13	JP14	JP15
3v	Closed	Closed	Closed	Open	Open	Open
3v/5v mixed	Open	Open	Open	Closed	Closed	Closed

CPU CONFIGURATION	
Type	JP1
Standard CPU	Closed
VRE CPU	Open

CPU SPEED CONFIGURATION				
Speed	JP2	JP3	JP5	JP6
75MHz	Open	Open	Closed	Closed
90MHz	Open	Open	Closed	Open
100MHz	Open	Open	Open	Closed
120MHz	Open	Closed	Closed	Open
133MHz	Open	Closed	Open	Closed
150MHz	Closed	Closed	Closed	Open
166MHz	Closed	Closed	Open	Closed
180MHz	Closed	Open	Closed	Open
200MHz	Closed	Open	Open	Closed

BIOS CONFIGURATION		
Setting	JP21	JP22
Flash BIOS/plug & play	Pins 1 & 2 closed	Pins 1 & 2 closed
Fixed BIOS/non flash/non plug & play	Pins 2 & 3 closed	Pins 2 & 3 closed