


DTK COMPUTER, INC.

P O M - 2 0 3 1 Y

Processor	80486SX/80487SX/80486DX
Processor Speed	16/20/25/33MHz
Chip Set	Symphony
Maximum Onboard Memory	32MB
Cache	None
BIOS	DTK/AMI
Dimensions	254mm x 218mm
I/O Options	None
NPU Options	None

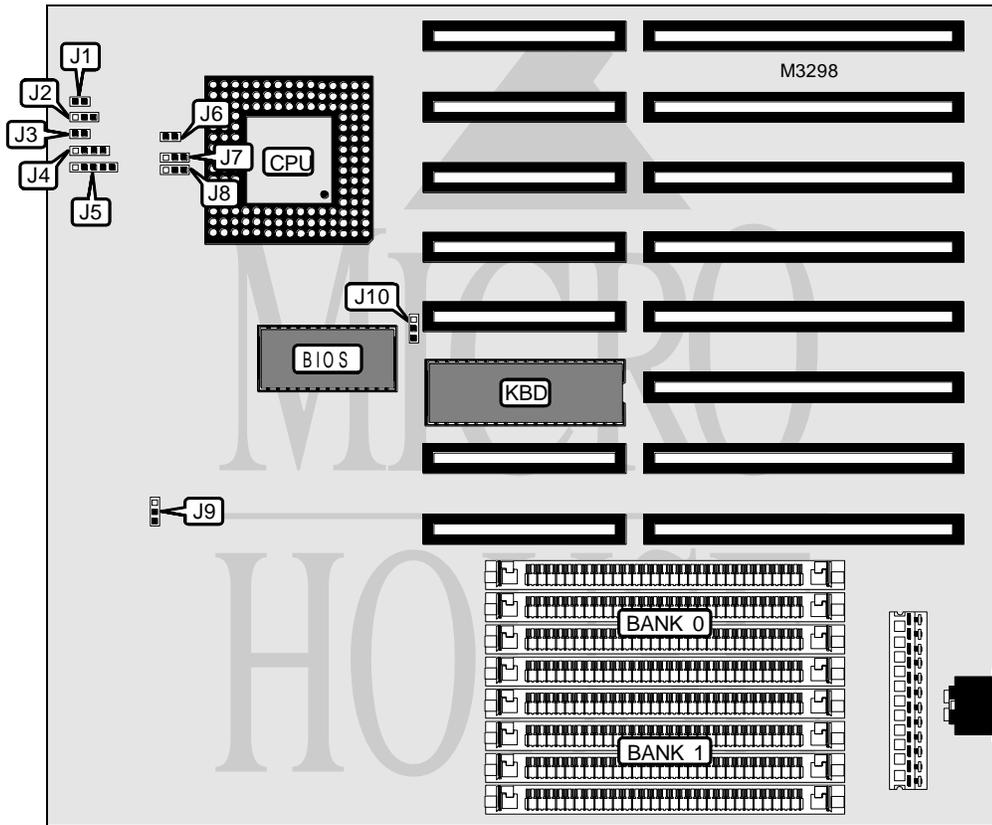

CONNECTIONS					
Function		Label	Function		Label
Turbo LED		J1	Speaker	J4	
Turbo switch		J2	Power LED & keylock	J5	
Reset switch		J3			

Continued on next page. . .

DTK COMPUTER, INC.
P O M - 2 0 3 1 Y

... continued from previous page

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Turbo disabled	J2	Pins 1 & 2 closed
Turbo enabled	J2	Open
Turbo software selectable CTRL, ALT, -	J2	Pins 2 & 3 closed
í Monitor type select monochrome	J10	Pins 1 & 2 closed
Monitor type select color	J10	Pins 2 & 3 closed

DRAM		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
17MB	(4) 256K x 9	(4) 4M x 9
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CPU TYPE			
Setting	J6	J7	J8
80486SX	Open	Pins 2 & 3 closed	Open
80487SX	Closed	Pins 1 & 2 closed	Pins 1 & 2 closed
80486DX	Closed	Pins 1 & 2 closed	Pins 2 & 3 closed

CPU SPEED	
Setting	J9
16MHz	Pins 2 & 3 closed
20MHz	Pins 1 & 2 closed
25MHz	Pins 2 & 3 closed
33MHz	Pins 2 & 3 closed