


KLH

MODEL 195

Processor	80286
Processor Speed	8/12MHz
Chip Set	SIS
Max. Onboard DRAM	5MB
Cache	None
BIOS	Phoenix
Dimensions	400mm x 400mm
I/O Options	Riser slot, VGA port, parallel port, serial ports (2), IDE interface, floppy drive interface
NPU Options	80287

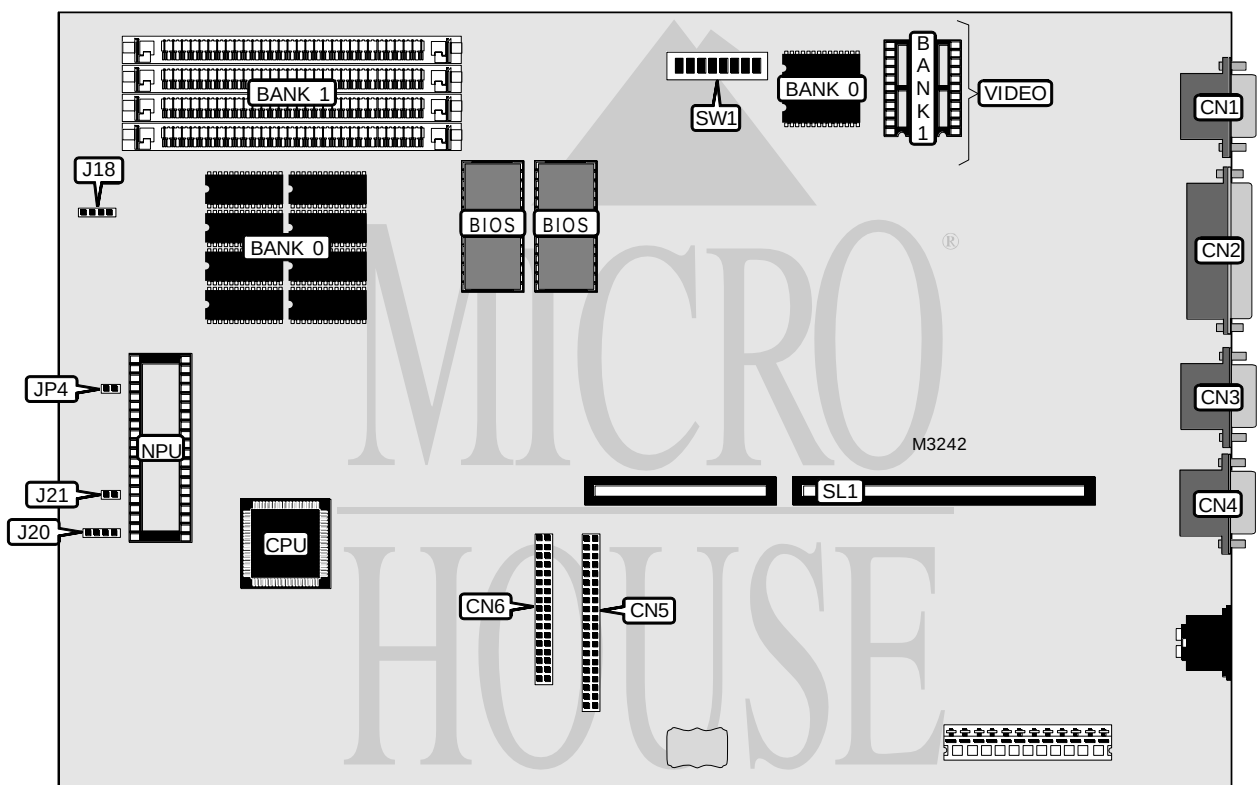

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Power LED	J7
Parallel port	CN2	Keylock	J18
Serial port 1	CN3	External battery	J20
Serial port 2	CN4	IDE interface LED	J21
IDE interface	CN5	Riser slot	SL1
Floppy drive interface	CN6		
Note: The location of J7 is unidentified.			

Continued on next page. . .

KLH

MODEL 195

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
Monitor type select color	JP4	Closed
Monitor type select monochrome	JP4	Open
On board video enabled	SW1/1	On
On board video disabled	SW1/1	Off
Monitor type select Multisync	SW1/2	On
Monitor type select any other monitor	SW1/2	Off
VGA mode select PS/2 mode	SW1/3	On
VGA mode select AT VGA mode	SW1/3	Off
Parallel port enabled	SW1/4	On
Parallel port disabled	SW1/4	Off
Serial port 1 enabled	SW1/5	On
Serial port 1 disabled	SW1/5	Off
Serial port 2 enabled	SW1/6	On
Serial port 2 disabled	SW1/6	Off
Floppy drive interface enabled	SW1/7	On
Floppy drive interface disabled	SW1/7	Off
IDE interface enabled	SW1/8	On
IDE interface disabled	SW1/8	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	1MB	None
2MB	1MB	(4) 256K x 9
5MB	1MB	(4) 1M x 9
Note: Bank 0 is factory installed and is not configurable.		

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
256KB	256KB	None
512KB	256KB	256KB
Note: Bank 0 is factory installed and is not configurable.		