


OLIVETTI

M300 BS3CARD

Processor	80386SX
Processor Speed	16MHz
Chip Set	Unidentified
Maximum Onboard Memory	4MB
Cache	None
BIOS	Unidentified
Dimensions	N/A
I/O Options	PS/2 mouse port
NPU Options	80387SX

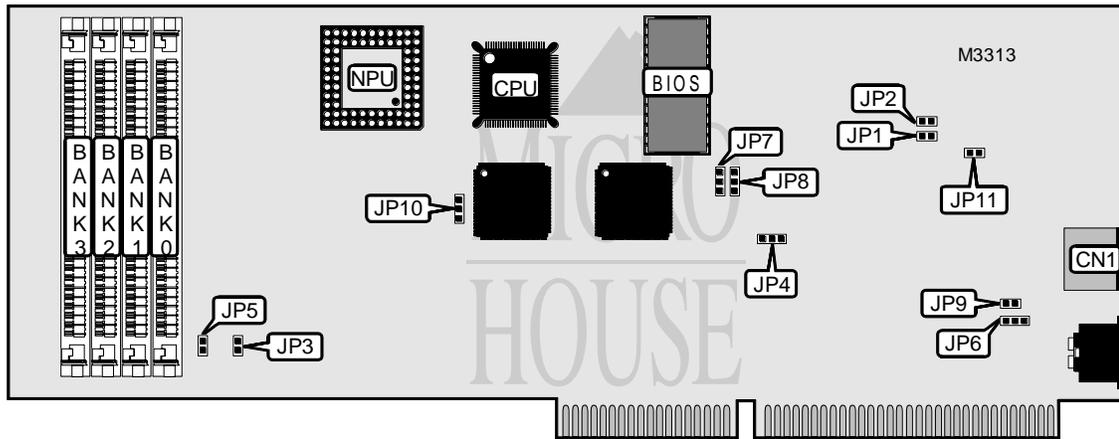

CONNECTIONS

Function	Label
PS/2 mouse port	CN1

USER CONFIGURABLE SETTINGS

Setting	Label	Position
í Factory configured - do not alter	JP3	Closed
í Factory configured - do not alter	JP5	Closed
A20GATE activated through keyboard control	JP6	Pins 1 & 2 closed
A20GATE activated in fast mode	JP6	Pins 2 & 3 closed
Video adapter - on board BIOS	JP9	Closed
Video adapter - not on board BIOS	JP9	Open
Mouse IRQ12 enabled	JP11	Closed
Mouse IRQ12 disabled	JP11	Open

DRAM

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 9			
2MB	(1) 1M x 9	(1) 1M x 9	None	None
4MB	(1) 1M x 9			

Continued on next page. . .

OLIVETTI

M300 BS3CARD

... continued from previous page

DRAM JUMPER		
Setting	JP1	JP2
100ns fast page mode 4	Open	Open
100ns fast page mode 1	Open	Closed
100ns	Closed	Open
120ns	Closed	Closed

82335				
Setting	JP4	JP7	JP8	JP10
82335A	Pins 2 & 3 closed			
82335B	Pins 1 & 2 closed			

MISCELLANEOUS TECHNICAL NOTE
The location of pin 1 is unidentified on all jumpers.