


# SPRINT MANUFACTURING CORPORATION

## MB - 486 V I

<b>Processor</b>	80486SX/80486DX/80486DX2/80486DX4/P24D/P24T
<b>Processor Speed</b>	16/20/25/33/40/50(internal)/50/66(internal)/75(internal)/80(internal)/100(internal)MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	128MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	64/128/256/512/1024KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	32-bit VESA local bus slots (3)
<b>NPU Options</b>	None

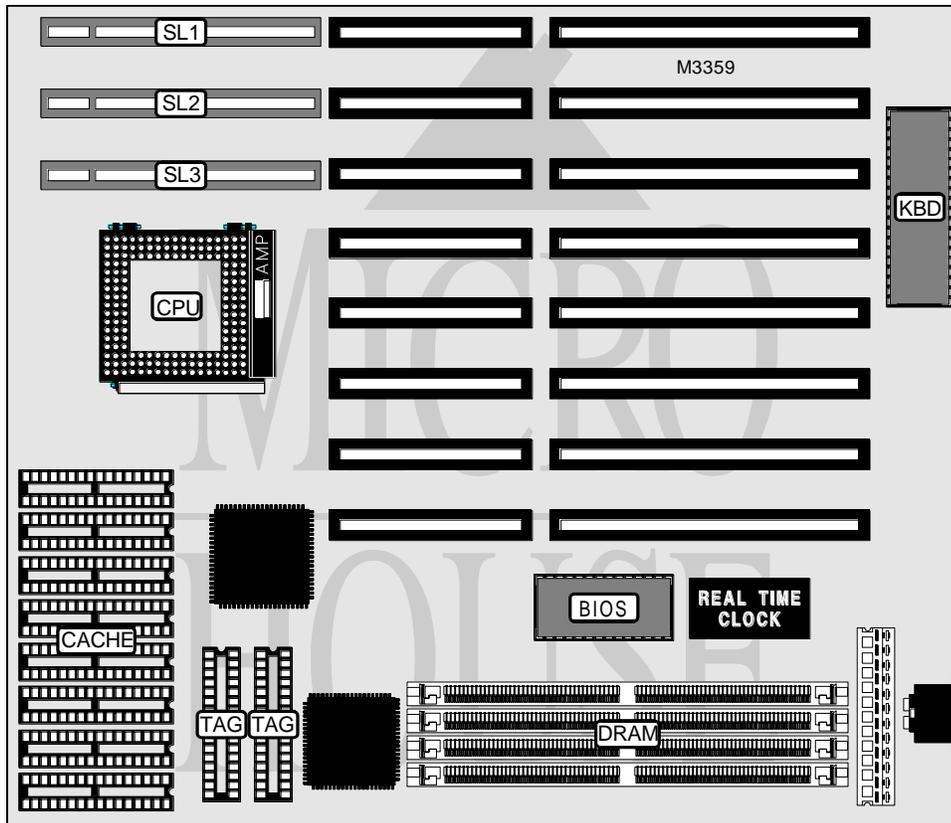

NOTE: THE LOCATION OF ALL JUMPERS ARE UNIDENTIFIED.

CONNECTIONS	
Purpose	Location
32-bit VESA local bus slots	SL1 - SL3

Continued on next page . . .

# SPRINT MANUFACTURING CORPORATION

## MB - 486 V I

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Monitor type select color	JP17	Closed
Monitor type select monochrome	JP17	Open
BIOS type select EPROM	JP18	Pins 1 & 2 closed
BIOS type select flash	JP18	Pins 2 & 3 closed
í Factory configured - do not alter	JP22	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	None	None	None
2MB	(1) 512K x 36	None	None	None
2MB	(1) 256K x 36	(1) 256K x 36	None	None
3MB	(1) 512K x 36	(1) 256K x 36	None	None
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	None
3MB	(1) 256K x 36	(1) 512K x 36	None	None
4MB	(1) 1M x 36	None	None	None
4MB	(1) 512K x 36	(1) 256K x 36	(1) 256K x 36	None
4MB	(1) 512K x 36	(1) 512K x 36	None	None
4MB	(1) 256K x 36			
5MB	(1) 1M x 36	(1) 256K x 36	None	None
5MB	(1) 512K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
5MB	(1) 256K x 36	(1) 512K x 36	(1) 512K x 36	None
5MB	(1) 256K x 36	(1) 1M x 36	None	None
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	None
6MB	(1) 1M x 36	(1) 512K x 36	None	None
6MB	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36	None
6MB	(1) 512K x 36	(1) 1M x 36	None	None
7MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
7MB	(1) 256K x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
8MB	(1) 2M x 36	None	None	None
8MB	(1) 1M x 36	(1) 512K x 36	(1) 512K x 36	None
8MB	(1) 1M x 36	(1) 1M x 36	None	None
8MB	(1) 512K x 36			
9MB	(1) 2M x 36	(1) 256K x 36	None	None
9MB	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36	None
9MB	(1) 256K x 36	(1) 2M x 36	None	None
10MB	(1) 2M x 36	(1) 256K x 36	(1) 256K x 36	None
10MB	(1) 2M x 36	(1) 512K x 36	None	None
10MB	(1) 1M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
10MB	(1) 512K x 36	(1) 1M x 36	(1) 1M x 36	None
10MB	(1) 512K x 36	(1) 2M x 36	None	None
11MB	(1) 2M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
12MB	(1) 2M x 36	(1) 512K x 36	(1) 512K x 36	None

Continued on next page...

# SPRINT MANUFACTURING CORPORATION

## MB - 486 VI

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
12MB	(1) 2M x 36	(1) 1M x 36	None	None
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	None
12MB	(1) 1M x 36	(1) 2M x 36	None	None
13MB	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
14MB	(1) 2M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
14MB	(1) 512K x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 4M x 36	None	None	None
16MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	None
16MB	(1) 2M x 36	(1) 2M x 36	None	None
16MB	(1) 1M x 36			
17MB	(1) 4M x 36	(1) 256K x 36	None	None
17MB	(1) 256K x 36	(1) 2M x 36	(1) 2M x 36	None
17MB	(1) 256K x 36	(1) 4M x 36	None	None
18MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	None
18MB	(1) 4M x 36	(1) 512K x 36	None	None
18MB	(1) 512K x 36	(1) 2M x 36	(1) 2M x 36	None
18MB	(1) 512K x 36	(1) 4M x 36	None	None
19MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
20MB	(1) 4M x 36	(1) 512K x 36	(1) 512K x 36	None
20MB	(1) 4M x 36	(1) 1M x 36	None	None
20MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
20MB	(1) 1M x 36	(1) 2M x 36	(1) 2M x 36	None
20MB	(1) 1M x 36	(1) 4M x 36	None	None
22MB	(1) 4M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	None
24MB	(1) 4M x 36	(1) 2M x 36	None	None
24MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	None
24MB	(1) 2M x 36	(1) 4M x 36	None	None
25MB	(1) 256K x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
26MB	(1) 512K x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
28MB	(1) 1M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
32MB	(1) 8M x 36	None	None	None
32MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	None
32MB	(1) 4M x 36	(1) 4M x 36	None	None
32MB	(1) 2M x 36			
33MB	(1) 8M x 36	(1) 256K x 36	None	None
33MB	(1) 256K x 36	(1) 4M x 36	(1) 4M x 36	None
33MB	(1) 256K x 36	(1) 8M x 36	None	None
34MB	(1) 8M x 36	(1) 256K x 36	(1) 256K x 36	None
34MB	(1) 8M x 36	(1) 512K x 36	None	None
34MB	(1) 512K x 36	(1) 4M x 36	(1) 4M x 36	None

Continued on next page...

# SPRINT MANUFACTURING CORPORATION

## MB-486VI

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
34MB	(1) 512K x 36	(1) 8M x 36	None	None
35MB	(1) 8M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
36MB	(1) 8M x 36	(1) 512K x 36	(1) 512K x 36	None
36MB	(1) 8M x 36	(1) 1M x 36	None	None
36MB	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36	None
36MB	(1) 1M x 36	(1) 8M x 36	None	None
38MB	(1) 8M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
40MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	None
40MB	(1) 8M x 36	(1) 2M x 36	None	None
40MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
40MB	(1) 2M x 36	(1) 4M x 36	(1) 4M x 36	None
40MB	(1) 2M x 36	(1) 8M x 36	None	None
44MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
48MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	None
48MB	(1) 8M x 36	(1) 4M x 36	None	None
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	None
48MB	(1) 4M x 36	(1) 8M x 36	None	None
49MB	(1) 256K x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
50MB	(1) 512K x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
52MB	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
56MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
56MB	(1) 2M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
64MB	(1) 8M x 36	(1) 4M x 36	(1) 4M x 36	None
64MB	(1) 8M x 36	(1) 8M x 36	None	None
64MB	(1) 4M x 36			
65MB	(1) 256K x 36	(1) 8M x 36	(1) 8M x 36	None
66MB	(1) 512K x 36	(1) 8M x 36	(1) 8M x 36	None
68MB	(1) 1M x 36	(1) 8M x 36	(1) 8M x 36	None
72MB	(1) 2M x 36	(1) 8M x 36	(1) 8M x 36	None
80MB	(1) 8M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
80MB	(1) 4M x 36	(1) 8M x 36	(1) 8M x 36	None
96MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	None
97MB	(1) 256K x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
98MB	(1) 512K x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
100MB	(1) 1M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
104MB	(1) 2M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
112MB	(1) 4M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
128MB	(1) 8M x 36			

Note: Board also accepts x 32 SIMMs.

DRAM JUMPER CONFIGURATION	
Type	JP3
Normal SIMM	Open
4K fast refresh 4M x 16 SIMM	Closed

*Continued on next page. . .*

# SPRINT MANUFACTURING CORPORATION

## MB - 486 V I

... continued from previous page

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(2) 8K x 8
128KB	(4) 32K x 8	None	(2) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(2) 32K x 8
512KB	(4) 128K x 8	None	(2) 32K x 8
1MB	(4) 128K x 8	(4) 128K x 8	(2) 128K x 8

Note: The location of banks 0 & 1, data TAG & TAG are unidentified.

CACHE JUMPER CONFIGURATION					
Size	JD1	JD2	JT1	JT2	JT3
64KB	2 & 3	2 & 3	1 & 2	1 & 2	1 & 2
128KB	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2
256KB	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2
512KB	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3
1MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.

CACHE TAG CONFIGURATION	
Setting	JP16
TAG combined	Pins 1 & 2 closed
TAG separated	Pins 2 & 3 closed

CPU CLOCK SPEED SELECTION			
Speed	JP25	JP26	JP27
16MHz	Closed	Closed	Closed
20MHz	Open	Closed	Closed
25MHz	Closed	Open	Closed
33MHz	Open	Open	Closed
40MHz	Closed	Closed	Open
50MHz	Open	Closed	Open
66MHz	Closed	Open	Open

CPU TYPE SELECTION						
Type	JP5	JP6	JP7	JP11	JP41	RN1
80486SX	2 & 3	Closed	N/A	N/A	N/A	Not installed
80486DX	1 & 2	Closed	N/A	1 & 2	N/A	Installed
80486DX2	1 & 2	Closed	N/A	1 & 2	N/A	Installed
80486DX4	1 & 2	Closed	N/A	1 & 2	N/A	Installed
P24D	1 & 2	Closed	2 & 3	1 & 2	1 & 2	Installed
P24T	1 & 2	N/A	N/A	2 & 3	N/A	Installed

Note: Pins designated should be in the closed position.

Continued on next page...

# SPRINT MANUFACTURING CORPORATION

## MB-486VI

... continued from previous page

CPU TYPE SELECTION		
Type	JP2	RN2
Non SL-enhanced	Open	Not installed
SL-enhanced	Closed	Installed

CPU TYPE SELECTION (P24D & P24T ONLY)		
Type	JP1	JP4
Write back	Closed	Closed
Write through	Open	Open

CPU MULTIPLIER SELECTION	
Multiplier	JP10
2x	Pins 1 & 2 closed
2.5x	Pins 2 & 3 closed
3x	Open

VL BUS WAIT STATE SELECTION	
Setting	JP20
0	Pins 1 & 2 closed
1	Pins 2 & 3 closed

VL-BUS SPEED SELECTION	
Setting	JP21
<= 33MHz	Pins 1 & 2 closed
>33 MHz	Pins 2 & 3 closed