


# NCR CORPORATION MODEL 3227

<b>Processor</b>	80486SX/80486DX/80486DX2
<b>Processor Speed</b>	25/33/50(internal)/66(internal)MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	310mm x 304mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot
<b>NPU Options</b>	None

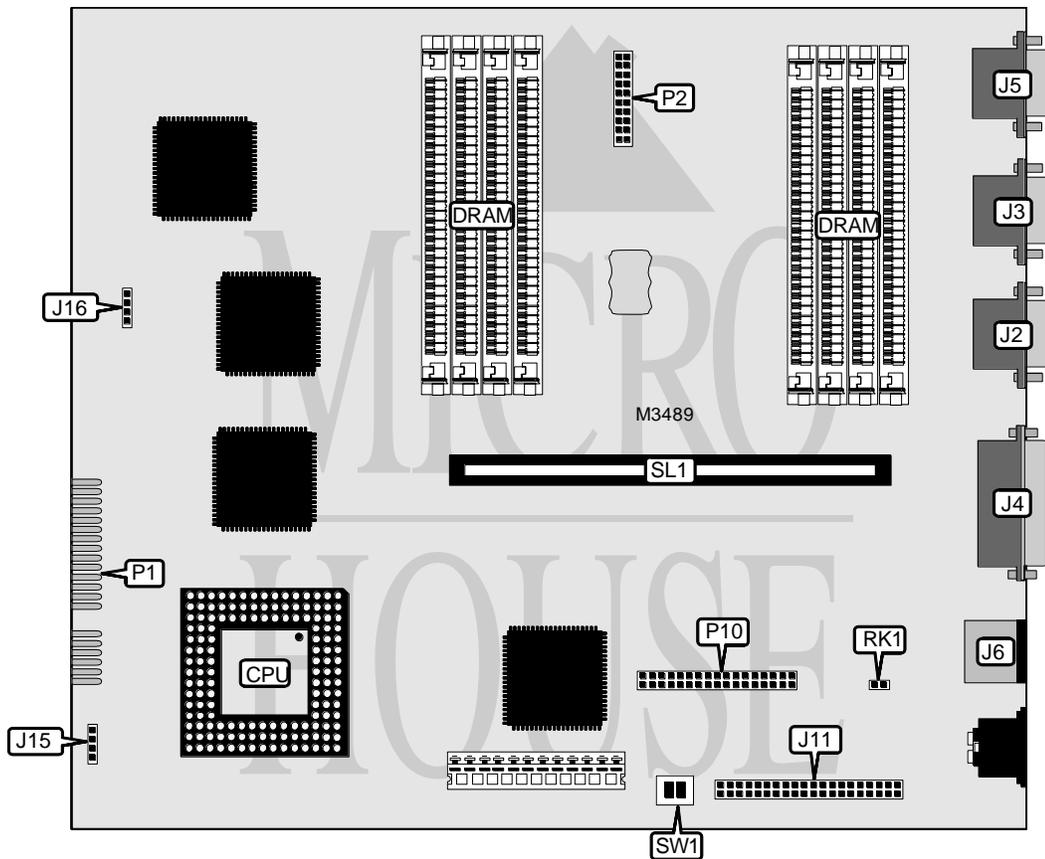

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 2	J2	Front panel LEDs	J15
Serial port 1	J3	Speaker	J16
Parallel port	J4	Test connector	P1
VGA port	J5	Floppy drive interface	P10
PS/2 mouse port	J6	Riser slot	SL1
IDE interface	J11		

*Continued on next page. . .*

# NCR CORPORATION

## MODEL 3227

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Connector/jumper information unavailable	P2	Unidentified
í Password normal operation	RK1	Open
Password clear	RK1	Closed
í On board video enabled	SW1/1	On
On board video disabled	SW1/1	Off
í Monitor type select color	SW1/2	On
Monitor type select monochrome	SW1/2	Off

Note: If SW1/1 is set to the "on" position, SW1/2 has no function.

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
4MB	(4) 1M x 9	None
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

Note: The location of banks 0 & 1 are unidentified.

VIDEO MEMORY CONFIGURATION
Note: The location of the 1MB video memory is unidentified.