


OLIVETTI

M290-25 (BA08)/M290-30 (BA278)

Processor	AM286 (M290-30)/80286 (M290-25)
Processor Speed	20MHz
Chip Set	Topcat
Maximum Onboard Memory	17MB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interfaces (2), parallel port, PS/2 mouse port, serial port, VGA port, riser slot
NPU Options	80287

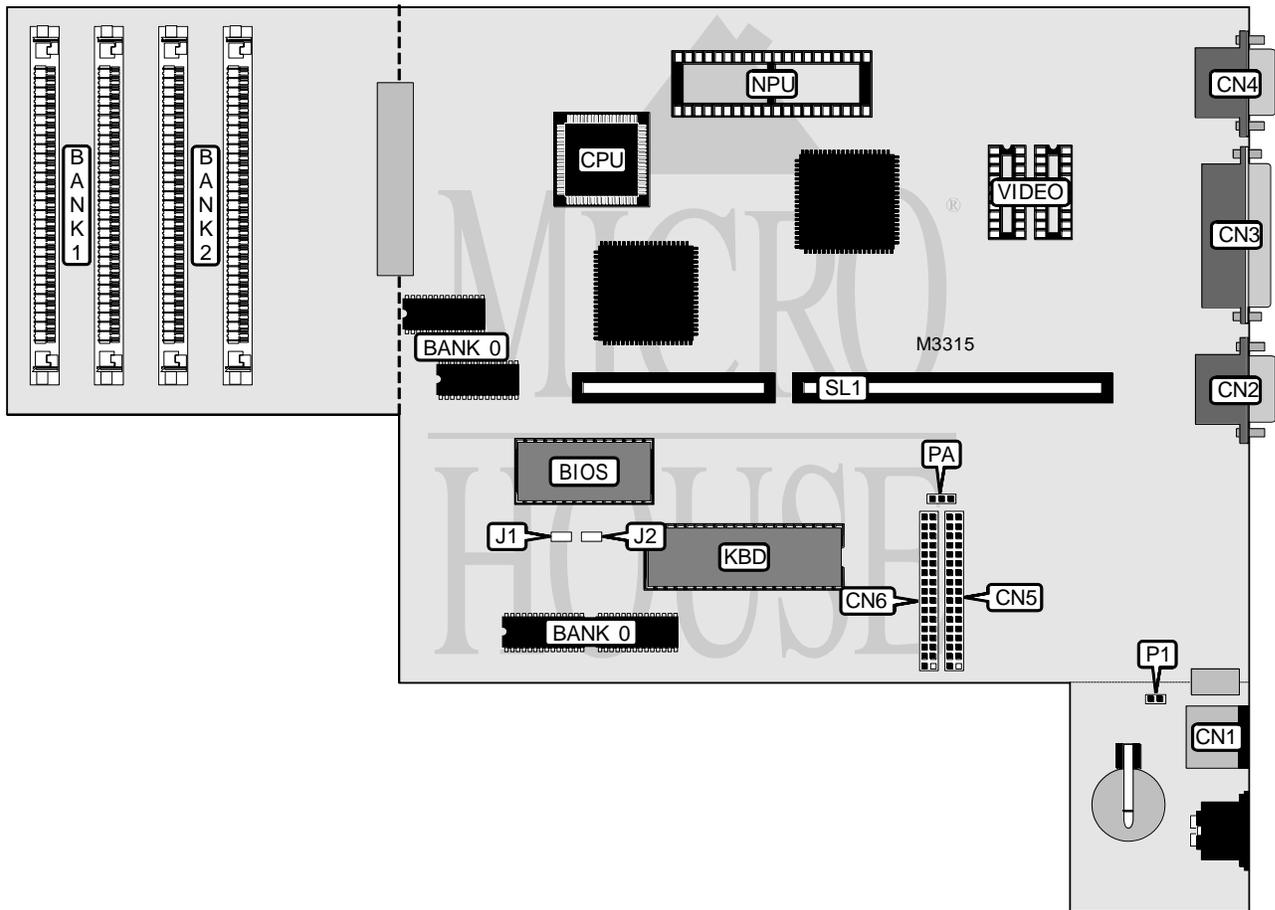

CONNECTIONS			
Function	Label	Function	Label
PS/2 mouse port	CN1	Floppy drive interface	CN6
Serial port	CN2	Key connector	J1
Parallel port	CN3	Hard drive LED	J2
VGA port	CN4	Riser slot	SL1
Floppy drive interface	CN5		

Continued on next page . . .

OLIVETTI

M290-25 (BA08)/M290-30 (BA278)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Password normal operation	PA	Pins 1 & 2 closed
Password clear	PA	Pins 2 & 3 closed
CMOS memory normal operation	P1	Closed
CMOS memory clear	P1	Open

DRAM			
Size	Bank 0	Bank 1	Bank 2
1MB	1MB	None	None
3MB	1MB	(2) 1M x 9	None
5MB	1MB	(2) 1M x 9	(2) 1M x 9
9MB	1MB	(2) 4M x 9	None
17MB	1MB	(2) 4M x 9	(2) 4M x 9

Note: Bank 0 is factory installed and is not configurable.

VIDEO MEMORY
Note: The size and chip types are unidentified.