
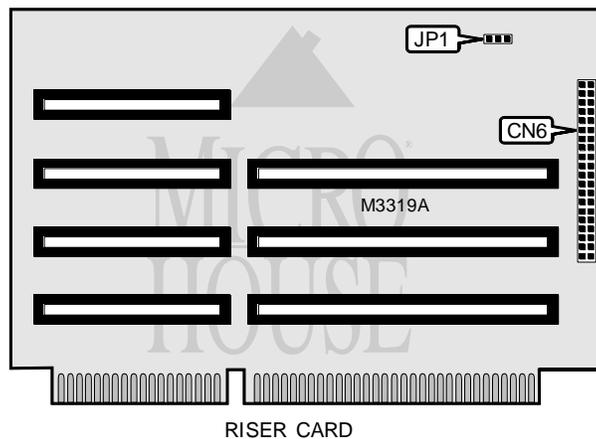


# KLH MODEL 215

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20MHz
<b>Chip Set</b>	C & T
<b>Maximum Onboard Memory</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port, VGA port, riser slot
<b>NPU Options</b>	80387SX

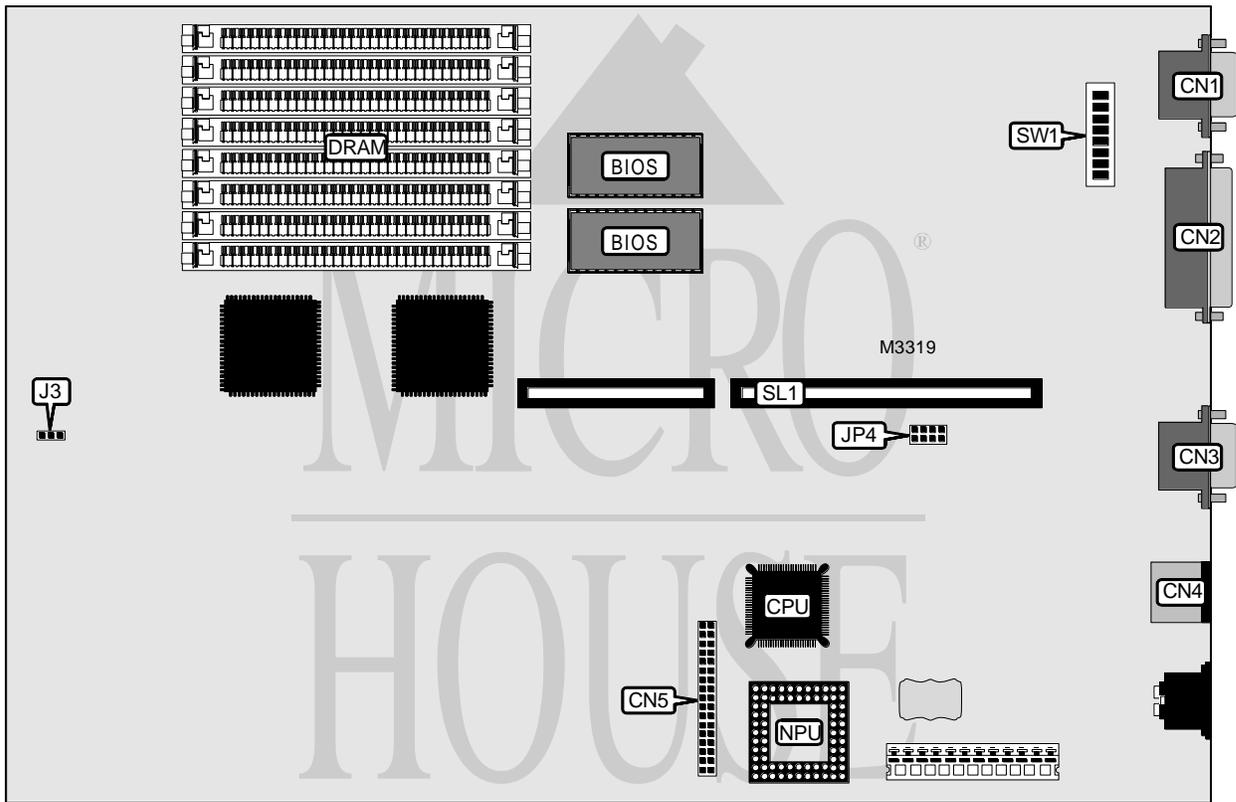

*Continued on next page. . .*

# KLH MODEL 215

... continued from previous page

CONNECTIONS			
Function	Label	Function	Label
VGA port	CN1	Floppy drive interface	CN5
Parallel port	CN2	IDE interface	CN6
Serial port	CN3	Riser slot	SL1
PS/2 mouse port	CN4		

Note: CN6 is located on the riser card.

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Oscillator select alternate oscillator	J3	Pins 1 & 2 closed
Oscillator select standard oscillator	J3	Pins 2 & 3 closed
Hard drive circuitry disabled	JP1	Pins 1 & 2 closed
Hard drive circuitry enabled	JP1	Pins 2 & 3 closed
í Mouse enabled	SW1/3	On
Mouse disabled	SW1/3	Off
í Serial port enabled	SW1/5	On
Serial port disabled	SW1/5	Off
í Parallel port enabled	SW1/6	On
Parallel port disabled	SW1/6	Off
í Floppy drive interface enabled	SW1/7	On
Floppy drive interface disabled	SW1/7	Off

Note: JP1 is located on the riser card.

DRAM		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9

Note: The orientation of the banks is unidentified.

MONITOR		
Setting	SW1/1	SW1/8
í Monochrome	On	Off
Color	Off	On

ON BOARD VIDEO		
Setting	SW1/2	SW1/4
í Enabled	On	On
Disabled	Off	Off

Continued on next page...

# KLH MODEL 215

... continued from previous page

IRQ	
Setting	JP4
IRQ3	Pins 3 & 4 closed
IRQ4	Pins 5 & 6 closed
IRQ5	Pins 7 & 8 closed
í IRQ9	Pins 1 & 2 closed

### MISCELLANEOUS TECHNICAL NOTE

The location of pin 1 on all jumpers and pin 1 on SW1 is unidentified.