



DTK COMPUTER, INC.

PPM-1661D(S)/PPM-2061D(S)/PPM-2561D(S)

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	DTK
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	None
BIOS	AMI/DTK
Dimensions	333mm x 222mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), game interface
NPU Options	80387SX

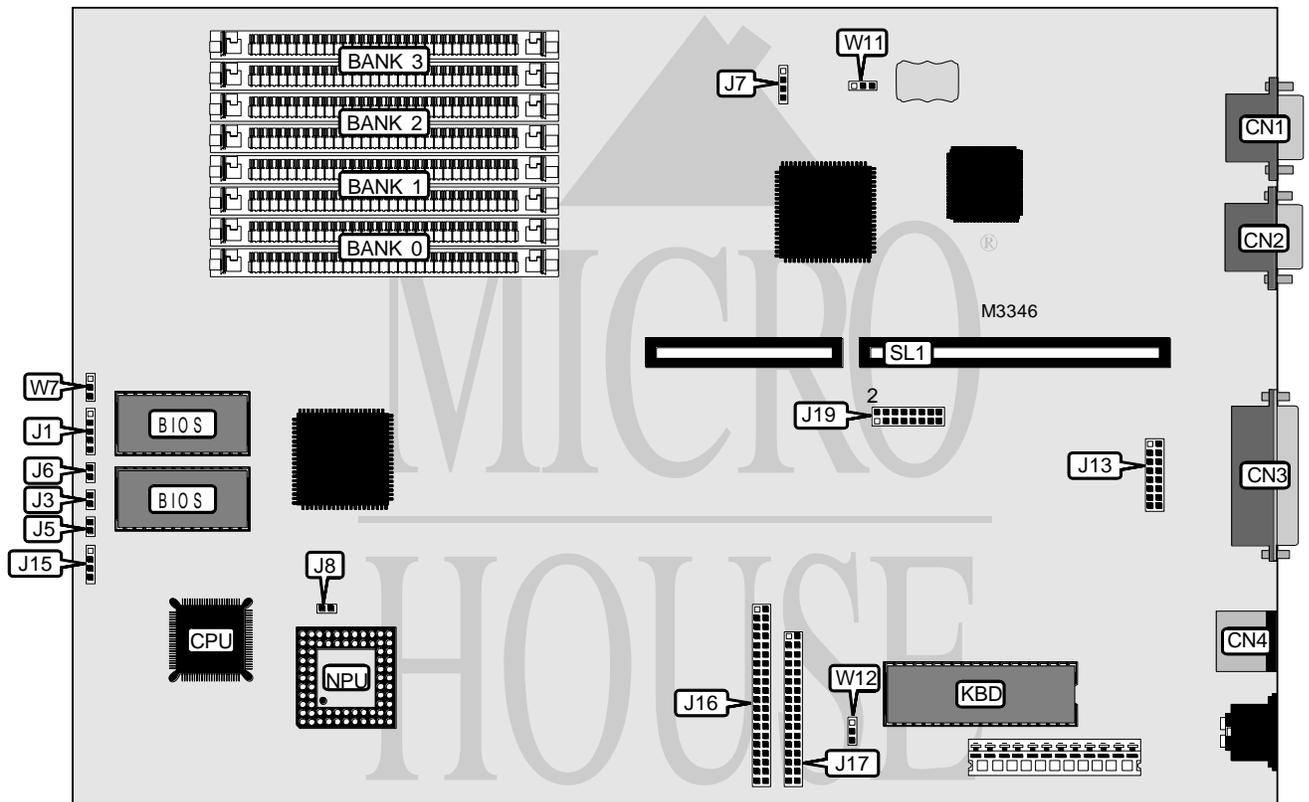

Continued on next page...

DTK COMPUTER, INC.

PPM - 1661D(S)/PPM - 2061D(S)/PPM - 2561D(S)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port	CN1	Reset switch	J6
Serial port	CN2	External battery	J7
Parallel port	CN3	Game interface	J13
PS/2 mouse port	CN4	IDE interface LED	J15
Power LED & keylock	J1	IDE interface	J16
Turbo switch	J3	Floppy drive interface	J17
Turbo LED	J5	Riser slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í NPU not installed	J8	Closed
NPU installed	J8	Open
í Floppy drive interface enabled	J19 pins 3 & 4	Closed
Floppy drive interface disabled	J19 pins 3 & 4	Open
í IDE interface disabled	J19 pins 13 & 14	Open
IDE interface enabled	J19 pins 13 & 14	Closed
Game port enabled	J19 pins 15 & 16	Closed
Game port disabled	J19 pins 15 & 16	Open
í BIOS type select 27256	W7	Pins 1 & 2 closed
BIOS type select 27128	W7	Pins 2 & 3 closed
í NPU clock input select 387CLK = 386CLK	W10	Open
NPU clock input select 387CLK = 386CLK/3	W10	Closed
í Battery type select external	W11	Pins 1 & 2 closed
Battery type select internal	W11	Pins 2 & 3 closed
í Monitor type select monochrome	W12	Pins 1 & 2 closed
Monitor type select color	W12	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	None
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	None	None	None
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
8MB	(2) 1M x 9			

Continued on next page...

DTK COMPUTER, INC.

PPM-1661D(S)/PPM-2061D(S)/PPM-2561D(S)

... continued from previous page

PARALLEL PORT ADDRESS/IRQ SELECTION			
Setting	IRQ	J19 pins 5 & 6	J19 pins 7 & 8
LPT1	IRQ7	Open	Closed
LPT2	IRQ5	Closed	Open
Disabled	None	Open	Open

SERIAL PORT SELECTION						
Port 1	Port 2	IRQ3	IRQ4	J19 pins 1&2	J19 pins 9&10	J19 pins 11&12
COM1	COM2	COM2	COM1	Closed	Closed	Closed
COM3	COM4	COM4	COM3	Open	Closed	Closed
COM1	Disabled	Available	COM1	Closed	Closed	Open
Disabled	COM2	COM2	Available	Closed	Open	Closed
COM3	Disabled	Available	COM3	Open	Closed	Open
Disabled	COM4	COM4	Available	Open	Open	Closed