


MICRONICS COMPUTERS, INC.

M 6 P I

Processor	Pentium Pro
Processor Speed	150/166/180/200MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	512MB
Maximum Video Memory	None
Cache	256KB (on Pentium Pro CPU)
BIOS	Phoenix
Dimensions	337mm x 216mm
I/O Options	32-bit PCI slots (3), floppy drive interface, IDE interfaces (2), parallel port, serial ports (2), IR connectors (2), VRM connector
NPU Options	None

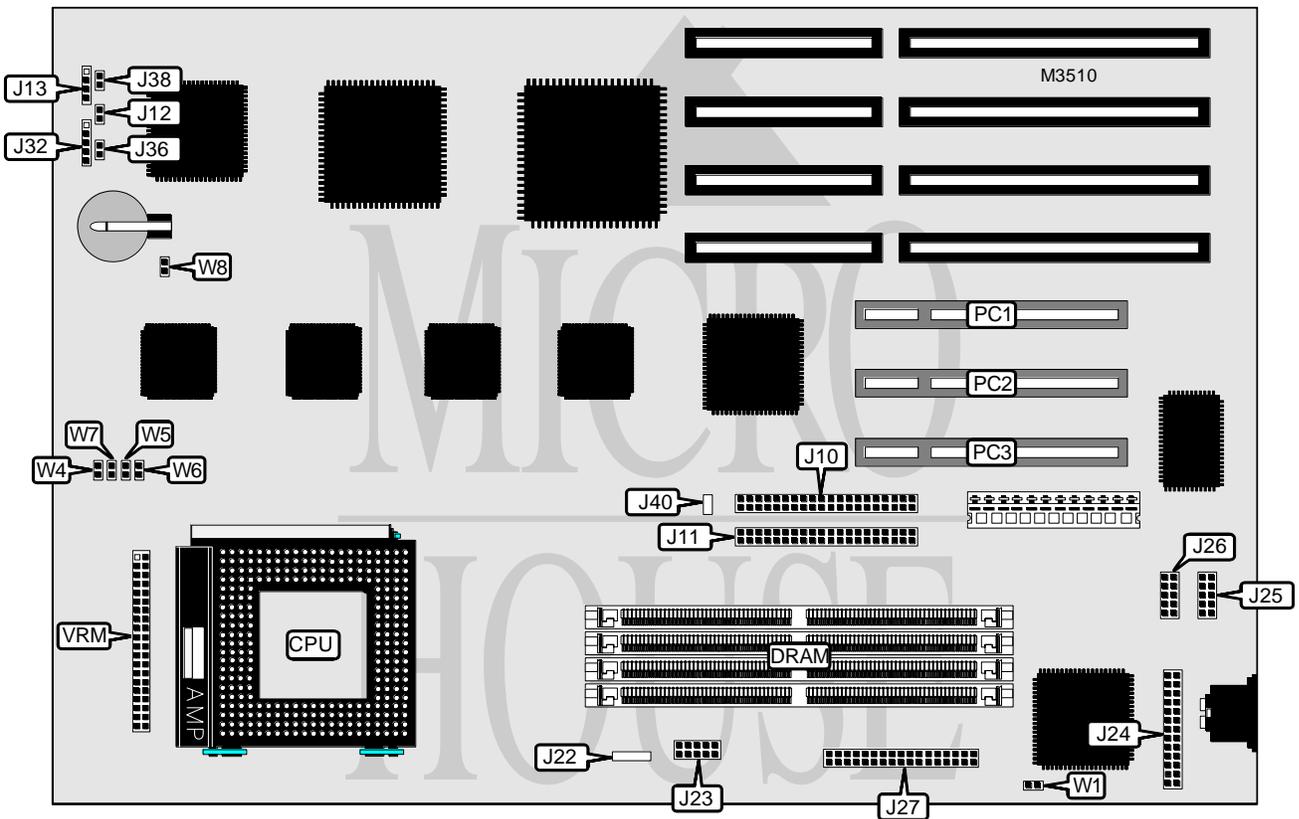

Continued on next page. . .

MICRONICS COMPUTERS, INC.

M 6 P I

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface 1	J10	Serial port 2	J26
IDE interface 2	J11	Floppy drive interface	J27
IDE interface LED	J12	Power LED & keylock	J32
Speaker	J13	Turbo LED	J36
IR connector	J22	Reset switch	J38
IR connector	J23	32-bit PCI slots	PC1 - PC3
Parallel port	J24	VRM connector	VRM
Serial port 1	J25		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Jumper information unavailable	J40	Unidentified
í CMOS memory normal operation	W1	Open
CMOS memory clear	W1	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
128MB	(2) 16M x 36	None
128MB	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36
256MB	(2) 32M x 36	None
512MB	(2) 32M x 36	(2) 32M x 36

Note: The location of banks 0 & 1 are unidentified.

CACHE CONFIGURATION
Note: 256KB cache is located on the Pentium Pro CPU.

CPU SPEED SELECTION						
CPU speed	Clock speed	W4	W5	W6	W7	W8
150MHz	60MHz	Closed	Closed	Closed	Open	Open
166MHz	66MHz	Closed	Closed	Closed	Open	Closed
180MHz	60MHz	Closed	Open	Closed	Closed	Open
200MHz	66MHz	Closed	Open	Closed	Closed	Closed