


# EVEREX SYSTEMS, INC.

## TEMPO 386/25/33C (EV-18103)

<b>Processor</b>	80386
<b>Processor Speed</b>	25/33MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	128KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, serial ports (2), VGA feature connector, VGA port, riser slot
<b>NPU Options</b>	80387

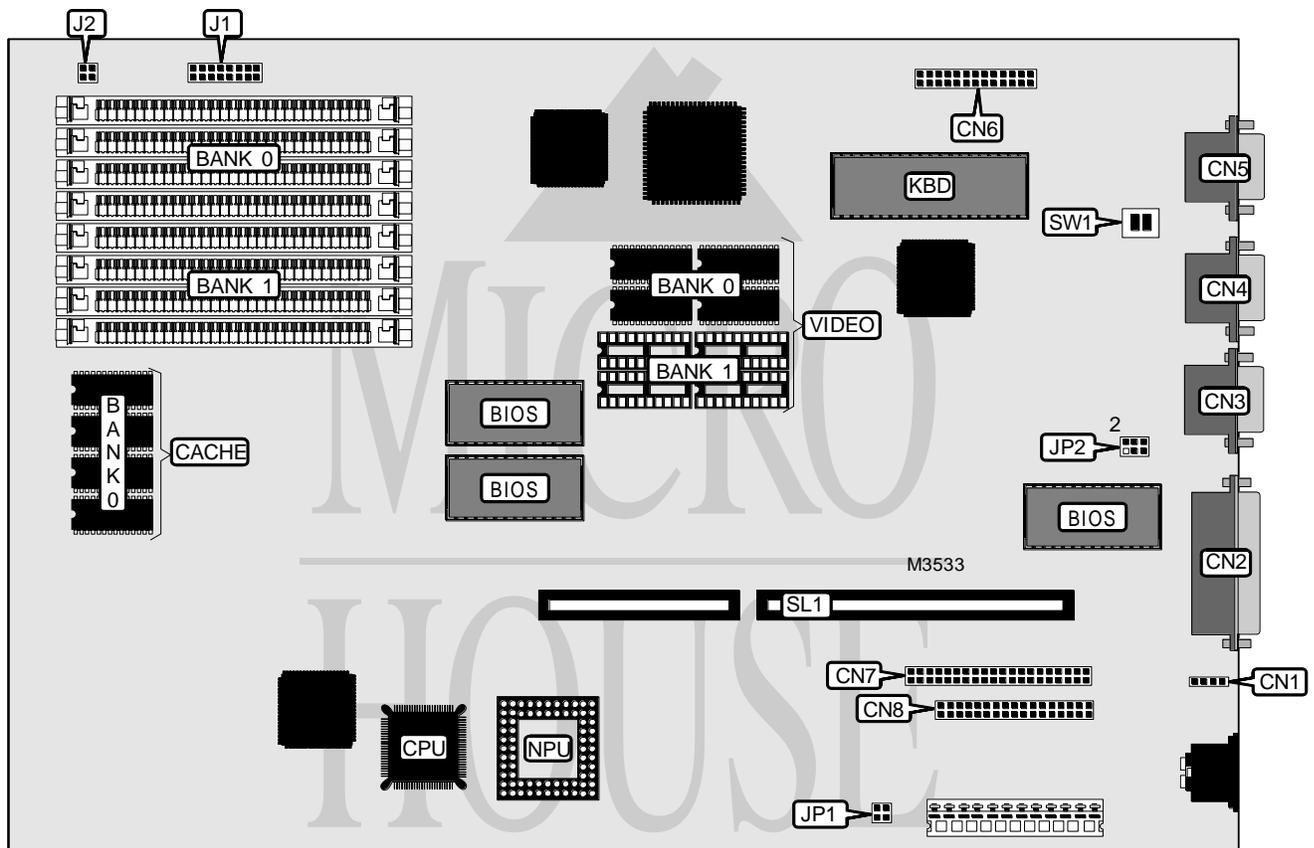

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	IDE interface	CN7
Parallel port	CN2	Floppy drive interface	CN8
Serial port 2	CN3	Front panel LEDs	J1
Serial port 1	CN4	Speaker/reset switch	J2
VGA port	CN5	Riser slot	SL1
VGA feature connector	CN6		

Continued on next page. . .

**EVEREX SYSTEMS, INC.**  
**TEMPO 386/25/33C (EV-18103)**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Floppy type select (jumper information unavailable)	JP1	Unavailable
IRQ2 enabled	JP2 pins 1 & 2	Closed
IRQ2 disabled	JP2 pins 1 & 2	Open
On board video enabled	JP2 pins 5 & 6	Closed
On board video disabled	JP2 pins 5 & 6	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
17MB	(4) 256K x 9	(4) 4M x 9
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION	
Size	Bank 0
128KB	(4) 32K x 8

Note: Cache is factory installed and is not configurable.

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
512KB	512KB	None
1MB	512KB	512KB

Note: The size of the chips are unidentified.

MONITOR SELECTION		
Setting	SW1/1	SW1/2
Super multi frequency	On	On
Multi frequency	Off	On
Super VGA	On	Off
VGA, PS/2, 8514	Off	Off