


AMAX ENGINEERING CORPORATION

AMAX 2000XT

Processor	8088
Processor Speed	Unidentified
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	640KB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	None
NPU Options	8087

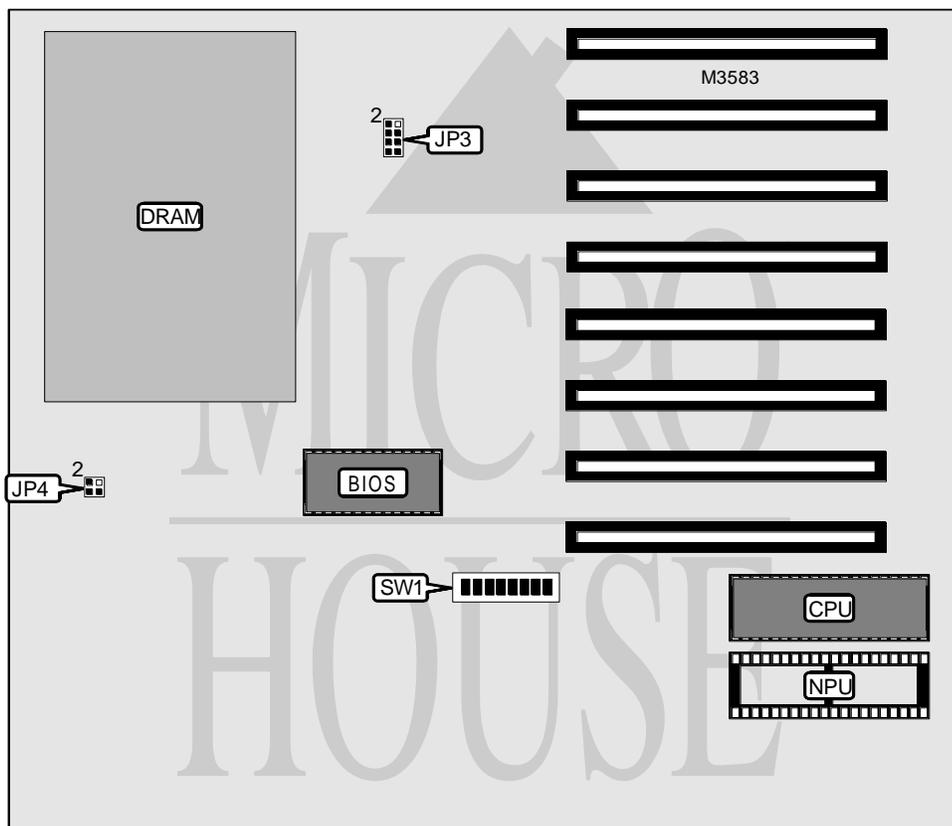

Continued on next page. . .

AMAX ENGINEERING CORPORATION

AMAX 2000XT

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	SW1/1	Off
NPU not installed	SW1/2	On
NPU installed	SW1/2	Off

DRAM CONFIGURATION
Note: Board accepts 256KB & 640KB memory. The size and number of chips is unidentified. The location of the banks are unidentified.

DRAM JUMPER CONFIGURATION				
Size	JP3	JP4	SW1/3	SW1/4
256KB	Pins 1 & 3, 5 & 7 closed	Pins 3 & 4 closed	Off	Off
640KB	Pins 2 & 4, 6 & 8 closed	Pins 1 & 2 closed	Off	Off

FLOPPY DRIVE SELECTION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

MONITOR SELECTION		
Setting	SW1/5	SW1/6
EGA or none installed	On	On
Color (40 x 20)	Off	On
Color (80 x 25)	On	Off
Monochrome	Off	Off