


# UNIDENTIFIED STM S286

Processor	80286
Processor Speed	6/8MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	640KB
Maximum Video Memory	None
Cache	None
BIOS	Award
Dimensions	330mm x 300mm
I/O Options	None
NPU Options	80287

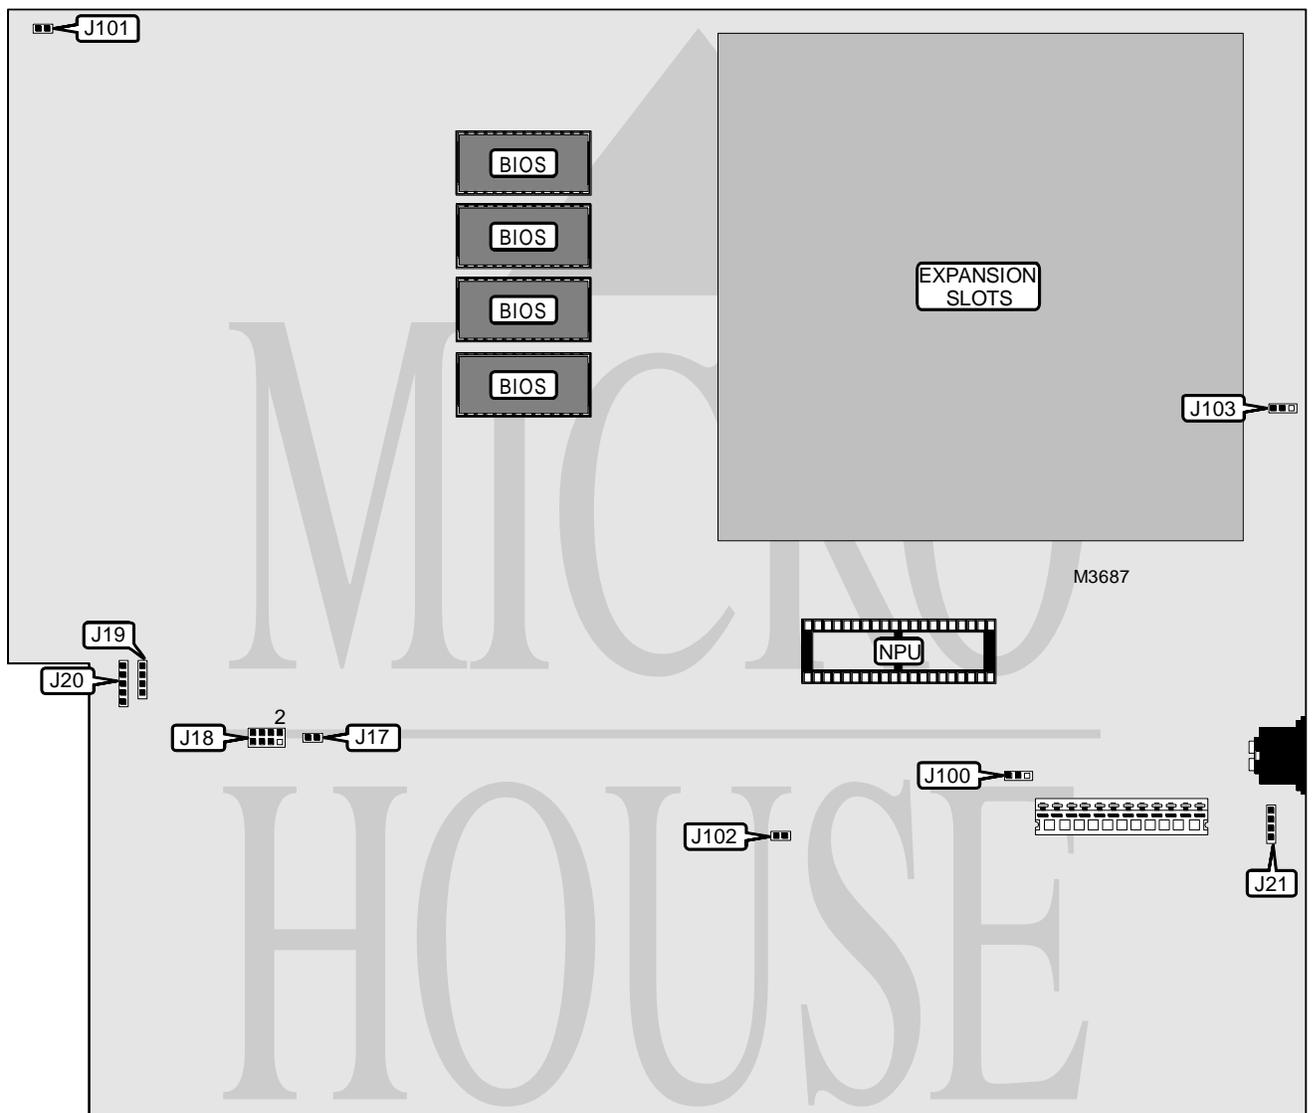

*Continued on next page. . .*

# UNIDENTIFIED STM S286

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J19	External battery	J21
Power LED & keylock	J20	Chassis fan power	J101

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J17	Unidentified
Monitor type select color	J100	Pins 1 & 2 closed
Monitor type select monochrome	J100	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
640KB	(18) 41256	(18) 4164
Note: The location of banks 0 & 1 are unidentified.		

CPU SPEED SELECTION	
Speed	J102
6MHz	Closed
8MHz	Open

NPU SPEED SELECTION	
Speed	J103
4.77MHz	Pins 1 & 2 closed
8MHz	Pins 2 & 3 closed

BIOS SELECTION	
Type	J18
27128	Pins 1 & 2, 3 & 4 closed
27256	Pins 5 & 6, 7 & 8 closed

MISCELLANEOUS TECHNICAL NOTE
Note: This board has 6 16-bit slots and 2 8-bit slots.