


MEMOREX TELEX CORPORATION

7065

Processor	80386SX
Processor Speed	16MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	None
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, parallel port, serial ports (2)
NPU Options	80387SX

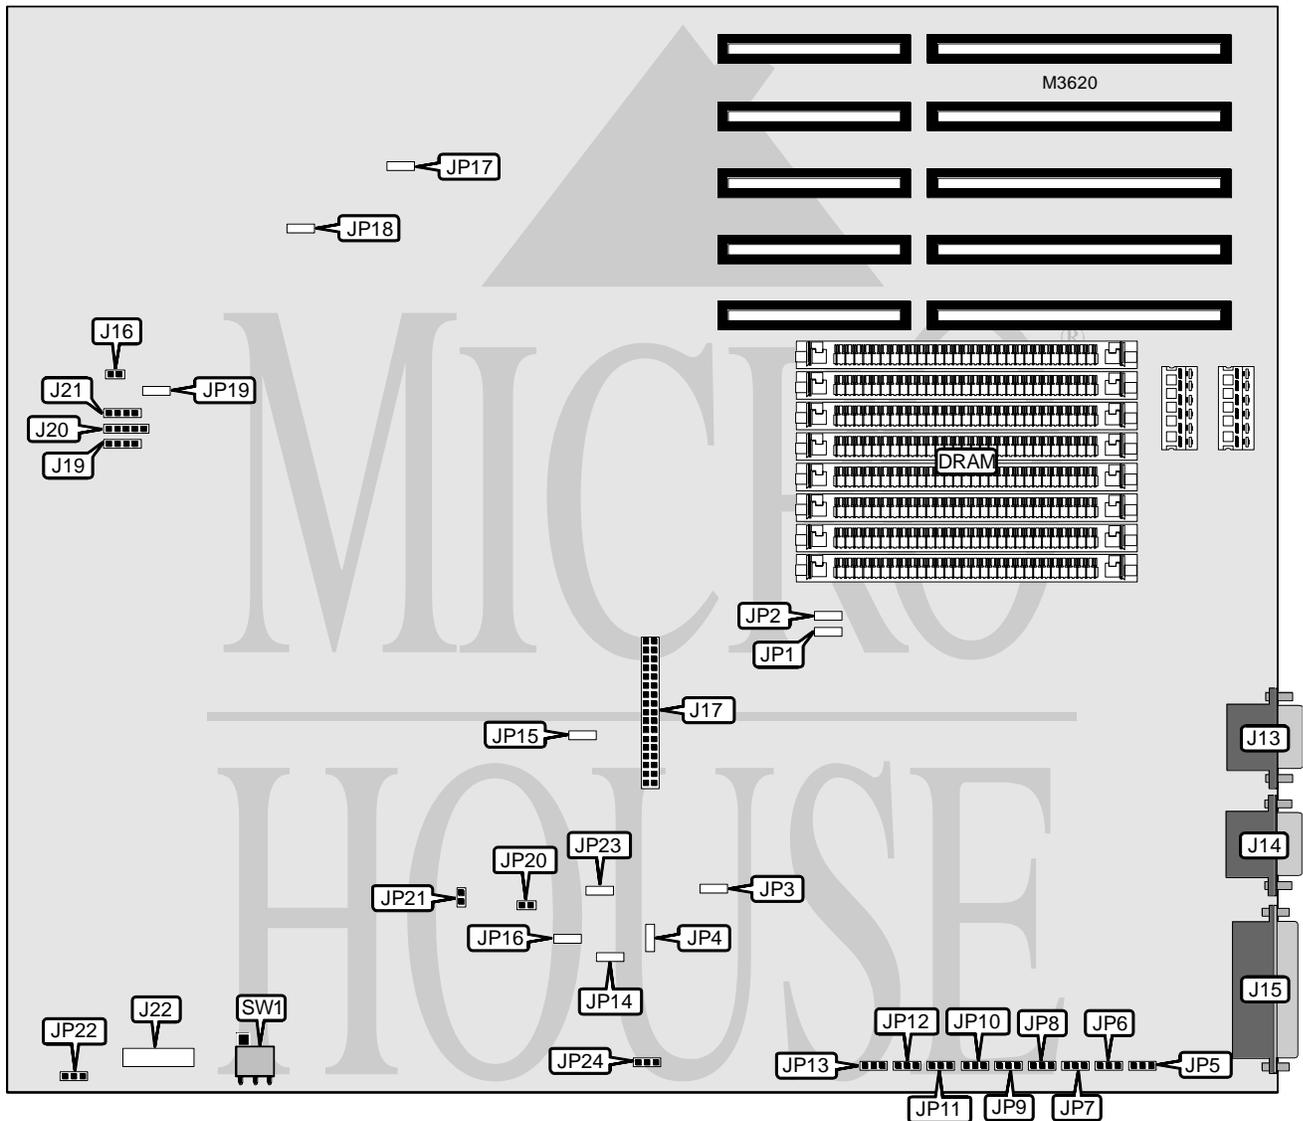

Continued on next page . . .

MEMOREX TELEX CORPORATION

7065

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 2	J13	Speaker	J19
Serial port 1	J14	Power LED & keylock	J20
Parallel port	J15	External battery	J21
Reset switch	J16	Keyboard connector	J22
Floppy drive interface	J17		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP1	Unidentified
í Factory configured - do not alter	JP2	Unidentified
í Factory configured - do not alter	JP3	Unidentified
í Factory configured - do not alter	JP4	Unidentified
í Parallel port IRQ select IRQ7	JP5	Pins 1 & 2 closed
Parallel port IRQ select IRQ5	JP5	Pins 2 & 3 closed
í Serial port 2 IRQ select IRQ3	JP6	Pins 2 & 3 closed
Serial port 2 IRQ select IRQ4	JP6	Pins 1 & 2 closed
í Serial port 1 IRQ select IRQ4	JP7	Pins 2 & 3 closed
Serial port 1 IRQ select IRQ3	JP7	Pins 1 & 2 closed
í Parallel port address select 378h	JP8	Pins 2 & 3 closed
Parallel port address select 278h	JP8	Pins 1 & 2 closed
í Serial port 2 address select 2F8h	JP9	Pins 1 & 2 closed
Serial port 2 address select 3F8h	JP9	Pins 2 & 3 closed
í Serial port 1 address select 3F8h	JP10	Pins 2 & 3 closed
Serial port 1 address select 2F8h	JP10	Pins 1 & 2 closed
í IDE interface not installed	JP11	Pins 2 & 3 closed
IDE interface installed	JP11	Pins 1 & 2 closed
í Floppy drive interface enabled	JP12	Pins 1 & 2 closed
Floppy drive interface disabled	JP12	Pins 2 & 3 closed
í Floppy drive address select 3FXh	JP13	Pins 2 & 3 closed
Floppy drive address select 37Xh	JP13	Pins 1 & 2 closed
í Factory configured - do not alter	JP14	Unidentified
í Factory configured - do not alter	JP15	Unidentified
í Factory configured - do not alter	JP16	Unidentified
í Factory configured - do not alter	JP17	Unidentified
í Factory configured - do not alter	JP18	Unidentified
í Factory configured - do not alter	JP19	Unidentified
í Factory configured - do not alter (8042 test select)	JP22	Pins 2 & 3 closed
í Factory configured - do not alter	JP23	Unidentified
í NPU not installed	JP24	Pins 2 & 3 closed
NPU installed	JP24	Pins 1 & 2 closed
í Monitor type select monochrome	SW1	Pins 2 & 3 closed
Monitor type select color	SW1	Pins 1 & 2 closed

Continued on next page...

MEMOREX TELEX CORPORATION

7065

... continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
8MB	(4) 1M x 9	(4) 1M x 9

Note: The location of banks 0 & 1 are unidentified.

I/O EXPANSION SLOT SPEED SELECTION		
Speed	JP20	JP21
8MHz	Closed	Open
10MHz	Open	Closed