


TEKRAM TECHNOLOGY CO., INC.

P5H30-NS/WS

Processor	CX M1/AM K5/Pentium
Processor Speed	75/90/100/120/133/150/166/180/200MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	256MB (EDO supported)
Maximum Video Memory	None
Cache	512KB
BIOS	Award
Dimensions	280mm x 220mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), Ultra-Wide SCSI connector, Ultra SCSI connector, parallel port, PS/2 mouse interface, serial ports (2), IR connector, USB connector, Adaptec RAID slot
NPU Options	None

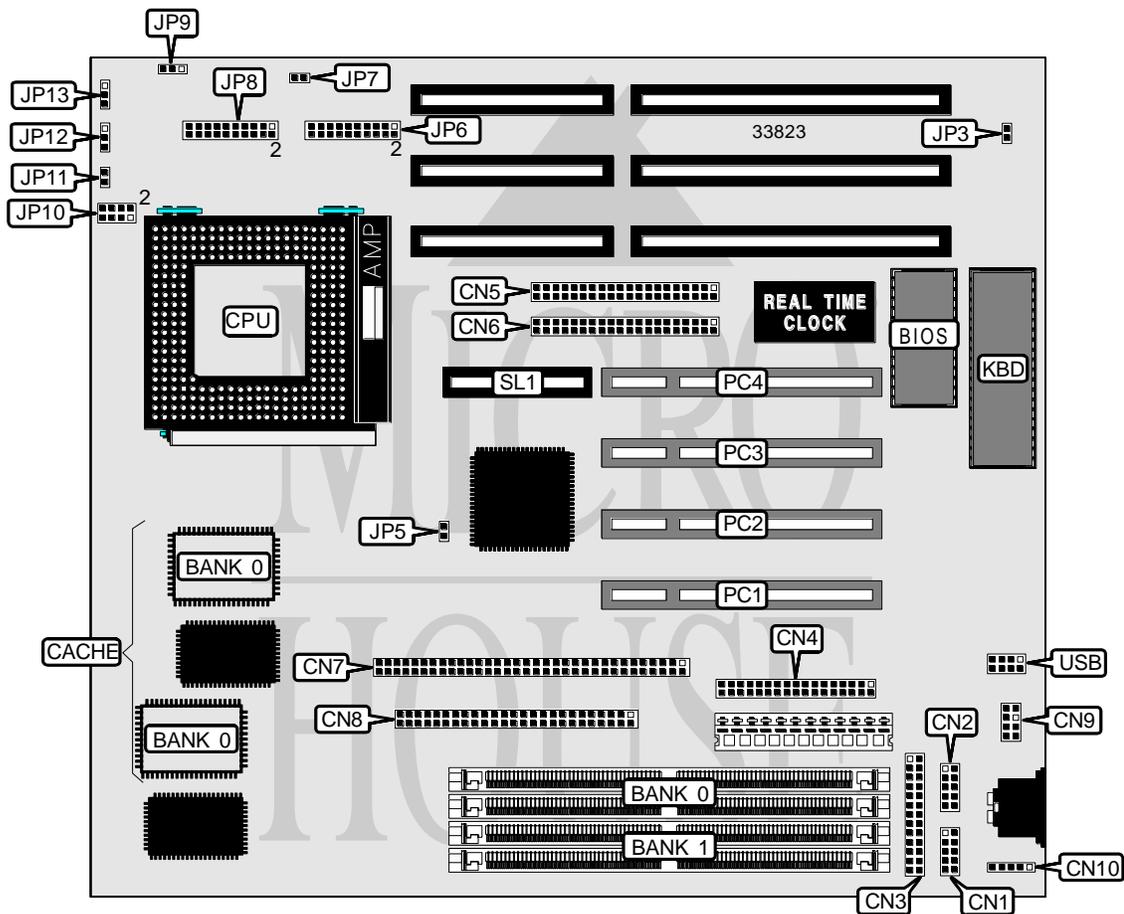

Continued on next page. . .

TEKRAM TECHNOLOGY CO., INC.
P 5 H 3 0 - N S / W S

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 2	CN1	IDE interface LED	JP7
Serial port 1	CN2	Power LED & keylock	JP8 pins 2, 4, 6, 8, 10
Parallel port	CN3	Turbo LED	JP8 pins 3 & 5
Floppy drive interface	CN4	Green PC connector	JP8 pins 7 & 9
IDE interface 1	CN5	Speaker	JP8 pins 14, 16, 18, 20
IDE interface 2	CN6	Reset switch	JP8 pins 17 & 19
Ultra-Wide SCSI connector	CN7	Chassis fan power	JP13
Ultra SCSI connector	CN8	32-bit PCI slots	PC1 - PC4
PS/2 mouse interface	CN9	Adaptec RAID slot (optional)	SL1
IR connector	CN10	USB connector	USB
SCSI interface LED	JP5		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP3	Open
CMOS memory clear	JP3	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36
32MB	(2) 4M x 36	None
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 1M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 16M x 36	None
128MB	(2) 8M x 36	(2) 8M x 36
136MB	(2) 16M x 36	(2) 1M x 36
144MB	(2) 16M x 36	(2) 2M x 36
160MB	(2) 16M x 36	(2) 4M x 36
192MB	(2) 16M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36

Note: Board accepts EDO memory.

Continued on next page. . .

TEKRAM TECHNOLOGY CO., INC.

P5H30-NS/WS

... continued from previous page

CACHE CONFIGURATION	
Size	Bank 0
512KB	(2) 64K x32

CPU SPEED SELECTION (CYRIX)			
CPU speed	Clock speed	Multiplier	JP6
120MHz	50MHz	2x	Pins 13 & 14 closed
133MHz	55MHz	2x	Pins 11 & 12 closed
150MHz	60MHz	2x	Pins 9 & 10 closed
166MHz	66MHz	2x	Pins 7 & 8 closed

CPU SPEED SELECTION (AMD & INTEL)			
CPU speed	Clock speed	Multiplier	JP6
75MHz	50MHz	1.5x	Pins 19 & 20 closed
90MHz	60MHz	1.5x	Pins 17 & 18 closed
100MHz	66MHz	1.5x	Pins 15 & 16 closed
120MHz	60MHz	2x	Pins 13 & 14 closed
133MHz	66MHz	2x	Pins 11 & 12 closed
150MHz	60MHz	2.5x	Pins 9 & 10 closed
166MHz	66MHz	2.5x	Pins 7 & 8 closed
180MHz	60MHz	3x	Pins 5 & 6 closed
200MHz	66MHz	3x	Pins 3 & 4 closed

CPU VOLTAGE SELECTION (SINGLE, CYRIX 6X86/AMD K5/P54C)				
Voltage	JP9	JP10	JP11	JP12
3.3v (STD)	1 & 2	1 & 2, 3 & 4, 5 & 6, 7 & 8	Closed	2 & 3
3.52v (VRE)	2 & 3	1 & 2, 3 & 4, 5 & 6, 7 & 8	Closed	2 & 3

Note: Pins designated should be in the closed position.

CPU VOLTAGE SELECTION (DUAL, CX 6X86L/P55C)				
Voltage	JP9	JP10	JP11	JP12
2.5v	N/A	Open	Closed	1 & 2
2.8v	N/A	Open	Open	1 & 2