


# UNIDENTIFIED 8MHz SYSTEM BOARD

<b>Processor</b>	8088
<b>Processor Speed</b>	4.77/8MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	640KB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

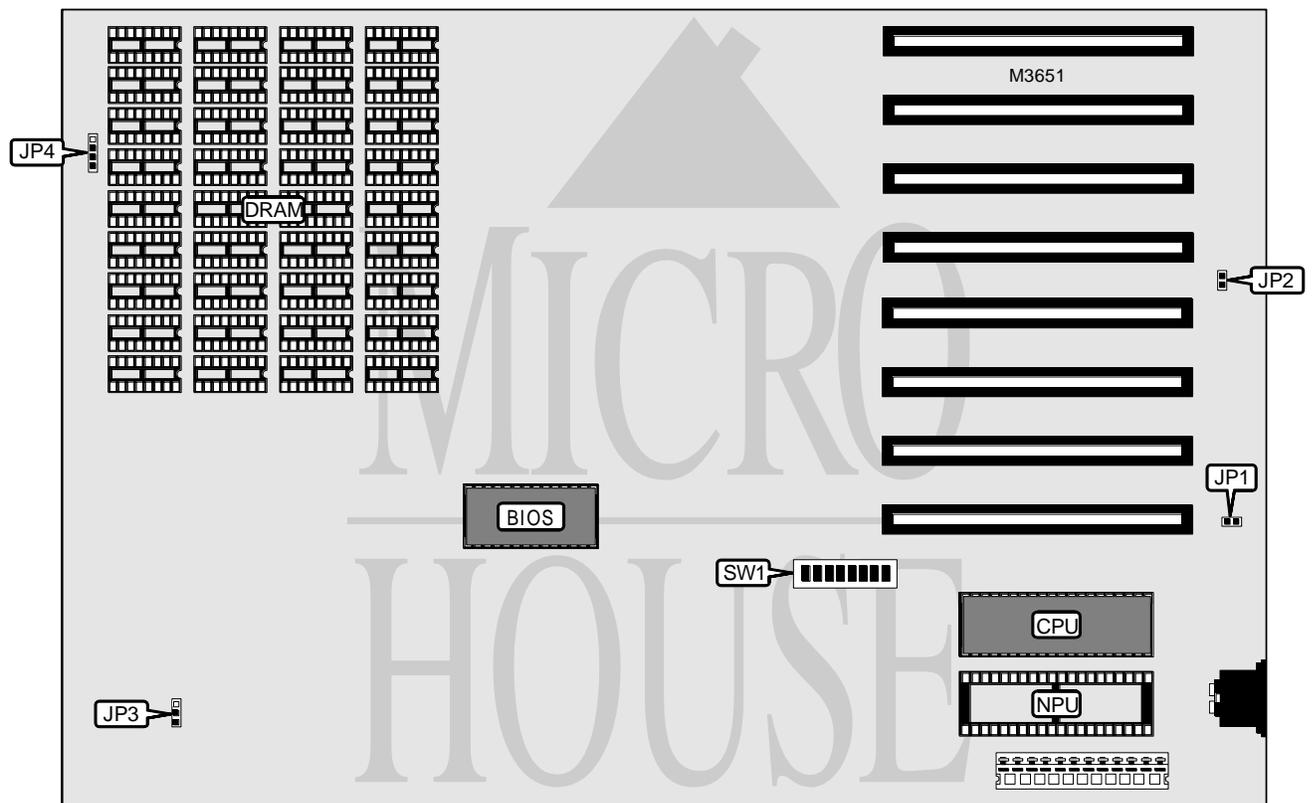

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	JP1	Speaker	JP4

*Continued on next page...*

# UNIDENTIFIED 8MHZ SYSTEM BOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	SW1/1	Off
NPU not installed	SW1/2	On
NPU installed	SW1/2	Off

**DRAM CONFIGURATION**  
 Note: The location of the banks are unidentified. The number and type of memory chips is unidentified.

DRAM SWITCH CONFIGURATION		
Size	SW1/3	SW1/4
128KB	Off	On
192KB	On	Off
256KB	Off	Off

DRAM JUMPER CONFIGURATION	
Size	JP3
4164 chips installed	Pins 2 & 3 closed
41256 & 4164 chips installed	Pins 1 & 2 closed

CPU SPEED SELECTION	
Speed	JP2
4.77MHz	Closed
8MHz	Open

FLOPPY DRIVE SELECTION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

MONITOR SELECTION		
Multiplier	SW1/5	SW1/6
None	On	On
Color (40 x 20)	Off	On
Color (80 x 25)	On	Off
Monochrome	Off	Off