


# UNIDENTIFIED

## A386SX, A486SLC

<b>Processor</b>	80386SX/CX486SLC
<b>Processor Speed</b>	16/20/25/33MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	16MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	228mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

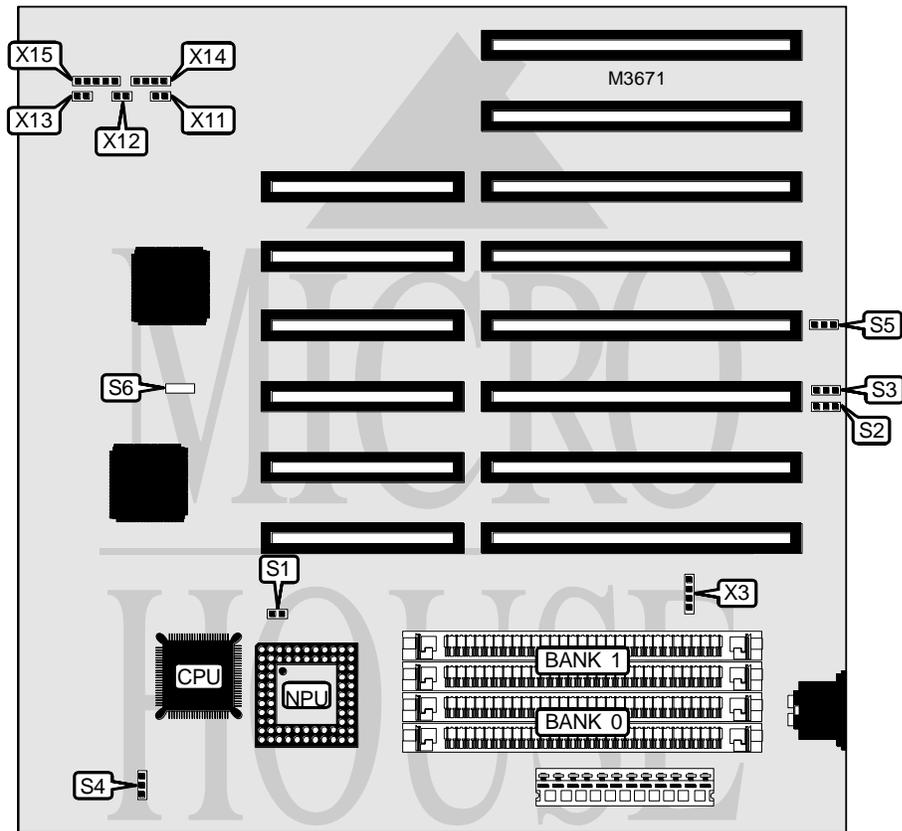

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	X3	Turbo switch	X13
Reset switch	X11	Speaker	X14
Turbo LED	X12	Power LED & keylock	X15

Continued on next page . . .

# UNIDENTIFIED

## A386SX, A486SLC

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select color	S1	Open
Monitor type select monochrome	S1	Closed
í Battery type select internal	S2	Pins 1 & 2 closed
Battery type select external	S2	Pins 2 & 3 closed
í Battery voltage select < 5v	S3	Pins 1 & 2 closed
Battery voltage select > 5v	S3	Pins 2 & 3 closed
í Factory configured - do not alter	S4	Pins 2 & 3 closed
í Power good signal detect from power supply	S5	Pins 2 & 3 closed
Power good signal detect from board	S5	Pins 1 & 2 closed
í Factory configured - do not alter	S6	Unidentified

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	None
10MB	(2) 4M x 9	(2) 1M x 9
16MB	(2) 4M x 9	(2) 4M x 9