


PC WARE INTERNATIONAL, INC. MB - ARIES II

Processor	CX M1/AM K5/Pentium
Processor Speed	75/90/100/120/133/150/166/180/200MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	128MB (EDO supported)
Maximum Video Memory	None
Cache	256/512KB
BIOS	Award
Dimensions	254mm x 218mm
I/O Options	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, PS/2 mouse interface, serial ports (2), cache slot, USB connector
NPU Options	None

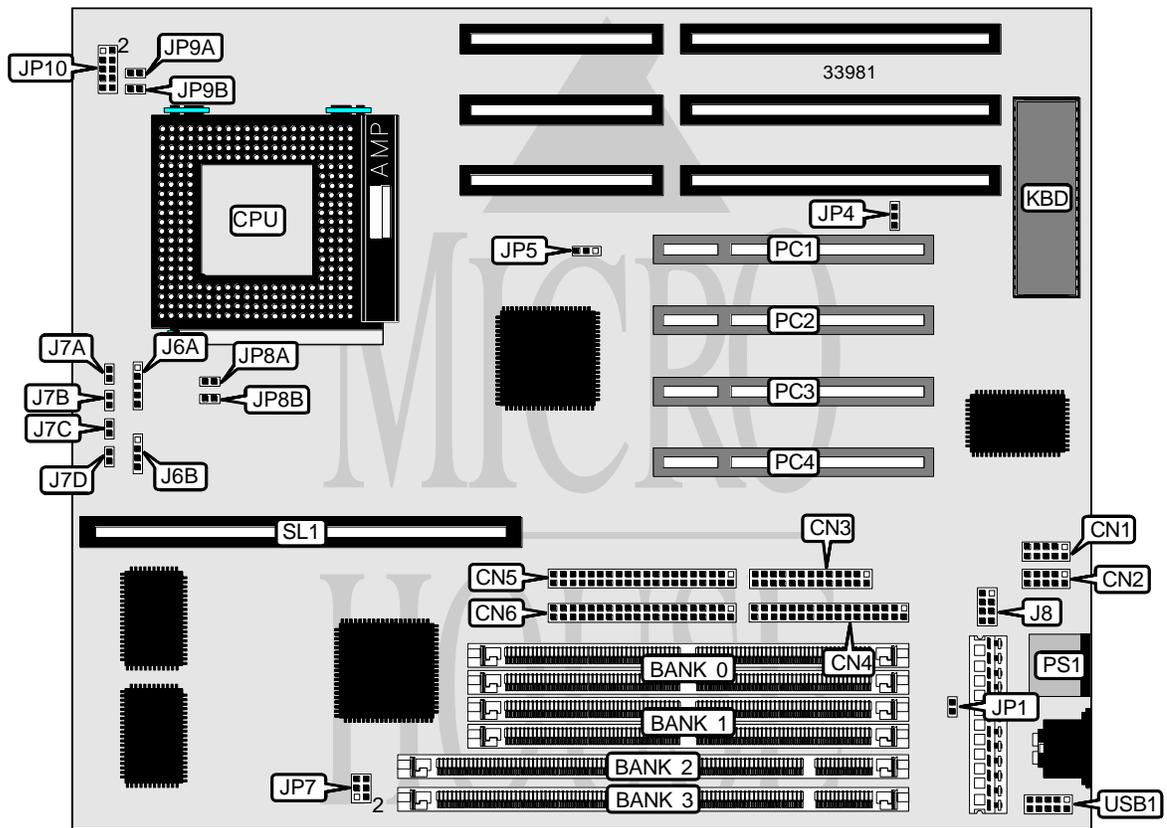

Continued on next page . . .

PC WARE INTERNATIONAL, INC.

MB - A R I E S II

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	CN1	IDE interface LED	J7B
Serial port 2	CN2	Turbo LED	J7C
Parallel port	CN3	Turbo switch	J7D
Floppy drive interface	CN4	PS/2 mouse interface	J8
IDE interface 2	CN5	32-bit PCI slots	PC1 – PC4
IDE interface 1	CN6	PS/2 mouse port	PS1
Power LED & keylock	J6A	Cache slot	SL1
Speaker	J6B	USB connector	USB1
Reset switch	J7A		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP1	Open
CMOS memory clear	JP1	Closed
í Flash BIOS voltage select 12v	JP5	Pins 1 & 2 closed
Flash BIOS voltage select 5v	JP5	Pins 2 & 3 closed

DIMM/DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(2) 1M x 36	None	None	None
8MB	None	(2) 1M x 36	None	None
8MB	None	None	(1) 1M x 64	None
8MB	None	None	None	(1) 1M x 64
16MB	(2) 2M x 36	None	None	None
16MB	None	(2) 2M x 36	None	None
16MB	None	None	(1) 2M x 64	None
16MB	None	None	None	(1) 2M x 64
16MB	(2) 1M x 36	(2) 1M x 36	None	None
16MB	(2) 1M x 36	None	None	(1) 1M x 64
16MB	None	(2) 1M x 36	(1) 1M x 64	None
16MB	None	None	(1) 1M x 64	(1) 1M x 64
24MB	None	(2) 2M x 36	(1) 1M x 64	None
24MB	(2) 2M x 36	None	None	(1) 1M x 64
32MB	(2) 4M x 36	None	None	None
32MB	None	(2) 4M x 36	None	None
32MB	None	None	(1) 4M x 64	None
32MB	None	None	None	(1) 4M x 64
32MB	(2) 2M x 36	(2) 2M x 36	None	None
32MB	(2) 2M x 36	None	None	(1) 2M x 64
32MB	None	(2) 2M x 36	(1) 2M x 64	None
32MB	None	None	(1) 2M x 64	(1) 2M x 64

Continued on next page. ...

PC WARE INTERNATIONAL, INC.

MB - ARIES II

... continued from previous page

DIMM/DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
40MB	(2) 4M x 36	(2) 1M x 36	None	None
40MB	None	(2) 4M x 36	(1) 1M x 64	None
40MB	(2) 4M x 36	None	None	(1) 1M x 64
48MB	None	(2) 2M x 36	(1) 4M x 64	None
48MB	(2) 2M x 36	None	None	(1) 4M x 64
48MB	(2) 4M x 36	(2) 2M x 36	None	None
48MB	None	(2) 4M x 36	(1) 2M x 64	None
48MB	(2) 4M x 36	None	None	(1) 2M x 64
64MB	(2) 8M x 36	None	None	None
64MB	None	(2) 8M x 36	None	None
64MB	None	None	(1) 8M x 64	None
64MB	None	None	None	(1) 8M x 64
64MB	(2) 4M x 36	(2) 4M x 36	None	None
64MB	(2) 4M x 36	None	None	(1) 4M x 64
64MB	None	(2) 4M x 36	(1) 4M x 64	None
64MB	None	None	(1) 4M x 64	(1) 4M x 64
64MB	(2) 4M x 36	(2) 4M x 36	None	None
72MB	(2) 8M x 36	(2) 1M x 36	None	None
72MB	(2) 8M x 36	None	None	(1) 1M x 64
72MB	None	(2) 8M x 36	(1) 1M x 64	None
80MB	None	(2) 2M x 36	(1) 8M x 64	None
80MB	(2) 2M x 36	None	None	(1) 8M x 64
80MB	(2) 8M x 36	(2) 2M x 36	None	None
80MB	(2) 8M x 36	None	None	(1) 2M x 64
80MB	None	(2) 8M x 36	(1) 2M x 64	None
96MB	(2) 4M x 36	(2) 8M x 36	None	None
96MB	None	(2) 4M x 36	(1) 8M x 64	None
96MB	(2) 4M x 36	None	None	(1) 8M x 64
96MB	(2) 8M x 36	(2) 4M x 36	None	None
96MB	(2) 8M x 36	None	None	(1) 4M x 64
96MB	None	(2) 8M x 36	(1) 4M x 64	None
128MB	None	None	(1) 8M x 64	(1) 8M x 64
128MB	(2) 8M x 36	(2) 8M x 36	None	None
128MB	(2) 8M x 36	None	None	(1) 8M x 64
128MB	None	(2) 8M x 36	(1) 8M x 64	None

Note: Board accepts EDO memory.

Continued on next page. ...

PC WARE INTERNATIONAL, INC.

MB - ARIES II

... continued from previous page

DIMM VOLTAGE JUMPER CONFIGURATION	
Size	JP7
3.3v	Pins 1 & 3, 2 & 4 closed
5v	Pins 3 & 5, 4 & 6 closed

CACHE CONFIGURATION		
Size	SL1	TAG
256KB	256KB module installed	(1) 8K/16K/32K x 8
512KB	512KB module installed	(1) 16K/32K x 8

CPU SPEED SELECTION (CYRIX)							
CPU speed	Clock speed	Multiplier	JP4	JP8A	JP8B	JP9A	JP9B
120MHz	50MHz	2x	2 & 3	Closed	Closed	Closed	Open
133MHz	55MHz	2x	N/A	Open	Open	Closed	Open
150MHz	60MHz	2x	1 & 2	Open	Closed	Closed	Open
166MHz	66MHz	2x	1 & 2	Closed	Open	Closed	Open

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (AMD)							
CPU speed	Clock speed	Multiplier	JP4	JP8A	JP8B	JP9A	JP9B
75MHz	50MHz	1.5x	2 & 3	Closed	Closed	Open	Open
90MHz	60MHz	1.5x	1 & 2	Open	Closed	Open	Open
100MHz	66MHz	1.5x	1 & 2	Closed	Open	Open	Open

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (INTEL)							
CPU speed	Clock speed	Multiplier	JP4	JP8A	JP8B	JP9A	JP9B
75MHz	50MHz	1.5x	2 & 3	Closed	Closed	Open	Open
90MHz	60MHz	1.5x	1 & 2	Open	Closed	Open	Open
100MHz	66MHz	1.5x	1 & 2	Closed	Open	Open	Open
120MHz	60MHz	2x	1 & 2	Open	Closed	Closed	Open
133MHz	66MHz	2x	1 & 2	Closed	Open	Closed	Open
150MHz	60MHz	2.5x	1 & 2	Open	Closed	Closed	Closed
166MHz	66MHz	2.5x	1 & 2	Closed	Open	Closed	Closed
180MHz	60MHz	3x	1 & 2	Open	Closed	Open	Closed
200MHz	66MHz	3x	1 & 2	Closed	Open	Open	Closed

Note: Pins designated should be in the closed position.

Continued on next page. . .

PC WARE INTERNATIONAL, INC.
MB-ARIES II

... continued from previous page

CPU VOLTAGE SELECTION	
Voltage	JP10
2.5v	Open
2.7v	Pins 7 & 8 closed
2.8v	Pins 5 & 6 closed
2.9v	Pins 3 & 4 closed
3.3v	Pins 9 & 10 closed
3.5v	Pins 1 & 2 closed