


# DIGITAL EQUIPMENT CORPORATION P3360 P91X5 CE (VER. 1)

<b>Processor</b>	80386
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	16MB (8MB on external memory card)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	64KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	350mm x 300mm
<b>I/O Options</b>	32-bit slots (2), parallel port, serial ports (2)
<b>NPU Options</b>	80387

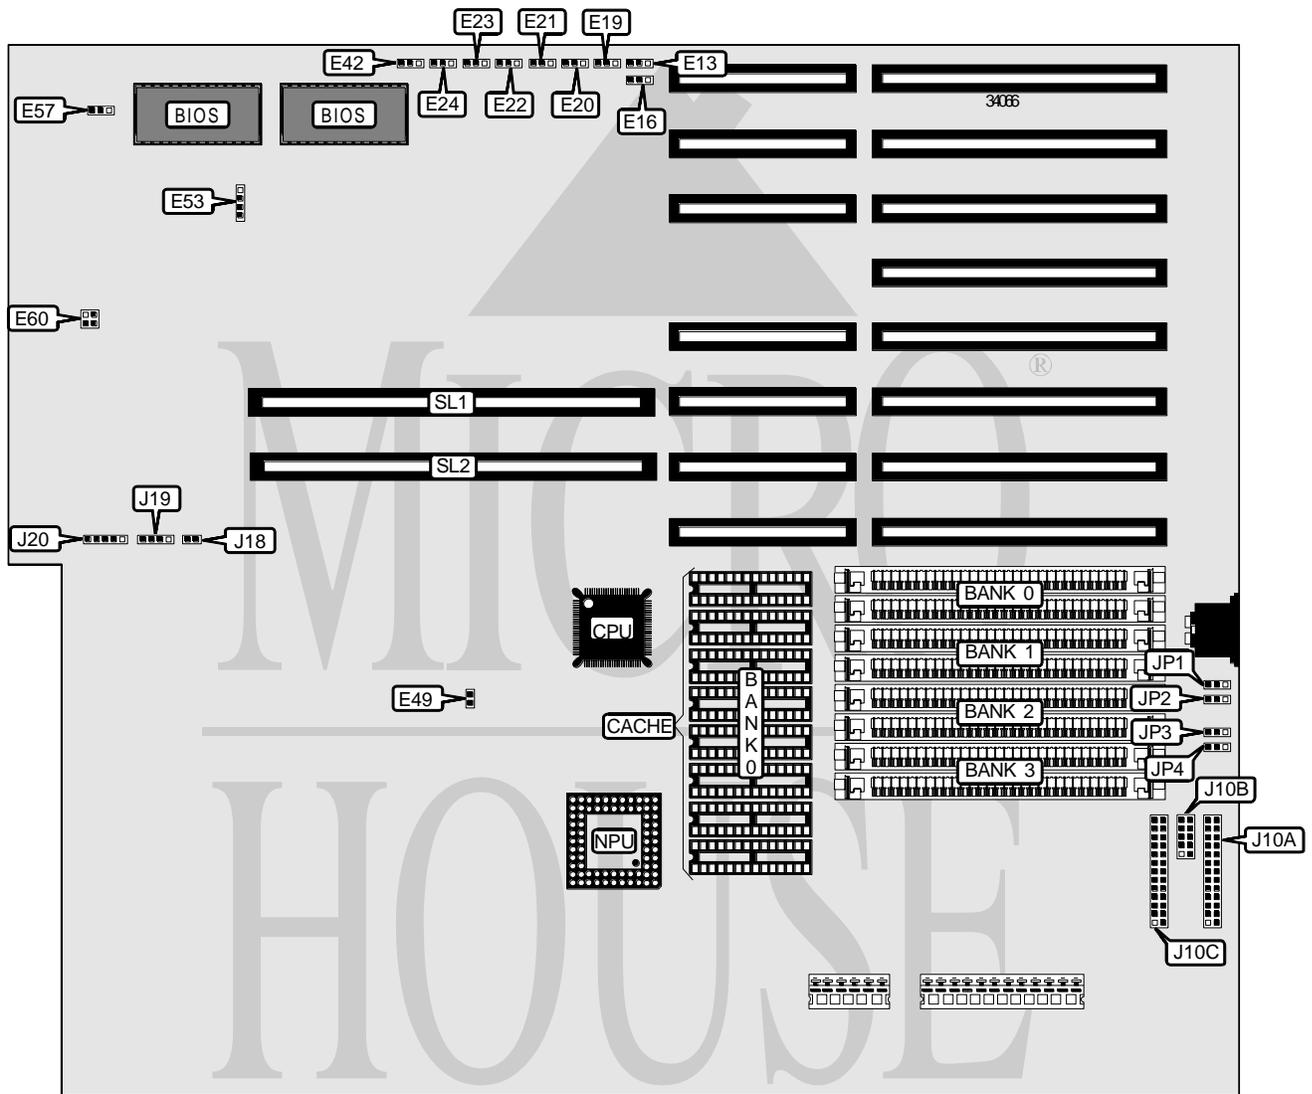

Continued on next page. . .

# DIGITAL EQUIPMENT CORPORATION

## P3360 P91X5 CE (VER. 1)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	J10A	Speaker	J19
Serial port	J10B	Power LED & keylock	J20
Serial port	J10C	32-bit slots	SL1 & SL2
Reset switch	J18		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Parallel port 278 disabled	E13	Pins 2 & 3 closed
Parallel port 278 enabled	E13	Pins 1 & 2 closed
í Printer acknowledge select trailing edge	E16	Pins 2 & 3 closed
Printer acknowledge select leading edge	E16	Pins 1 & 2 closed
í Parallel port 378 enabled	E19	Pins 1 & 2 closed
Parallel port 378 disabled	E19	Pins 2 & 3 closed
í Serial port 3F8 enabled	E20	Pins 1 & 2 closed
Serial port 3F8 disabled	E20	Pins 2 & 3 closed
í Serial port 2F8 enabled	E21	Pins 1 & 2 closed
Serial port 2F8 disabled	E21	Pins 2 & 3 closed
NPU not installed	E22	Pins 2 & 3 closed
NPU installed	E22	Pins 1 & 2 closed
í Keyboard reset disabled	E23	Pins 2 & 3 closed
Keyboard reset enabled	E23	Pins 1 & 2 closed
Unix mode enabled	E24	Pins 1 & 2 closed
Unix mode disabled	E24	Pins 2 & 3 closed
í Monitor type select color	E42	Pins 2 & 3 closed
Monitor type select monochrome	E42	Pins 1 & 2 closed
í Factory configured - do not alter	E49	Closed
í BIOS type select 2764	E57	Pins 1 & 2 closed
BIOS type select 27128	E57	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	None	None
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	None	None	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
8MB	(2) 1M x 9			

DRAM JUMPER CONFIGURATION	
Size	E60
1MB	Open
2MB	Pins 3 & 4 closed
4MB	Pins 1 & 2 closed
8MB	Pins 1 & 2, 3 & 4 closed

Continued on next page...

DIGITAL EQUIPMENT CORPORATION  
P3360 P91X5 CE (VER. 1)

... continued from previous page

DRAM SIZE SELECTION		
Size	JP3	JP4
256K x 9	Pins 1 & 2 closed	Pins 1 & 2 closed
1M x 9	Pins 2 & 3 closed	Pins 2 & 3 closed

DRAM SPEED SELECTION		
Speed	JP1	JP2
100ns	Pins 1 & 2 closed	Pins 1 & 2 closed
120ns	Pins 2 & 3 closed	Pins 2 & 3 closed

SIMM TYPE CONFIGURATION	
Type	E53
Static column	Pins 3 & 4 closed
Do not strap	Pins 1 & 2 closed
Standard RAS/CAS	Open
Fast page mode	Pins 1 & 2, 3 & 4 closed

CACHE CONFIGURATION	
Size	Bank 0
64KB	(8) 8K x 8