


DIGITAL EQUIPMENT CORPORATION

DECPC LPX 560/566

Processor	Pentium/Alpha
Processor Speed	60/66MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	128MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), CPU slot
NPU Options	None

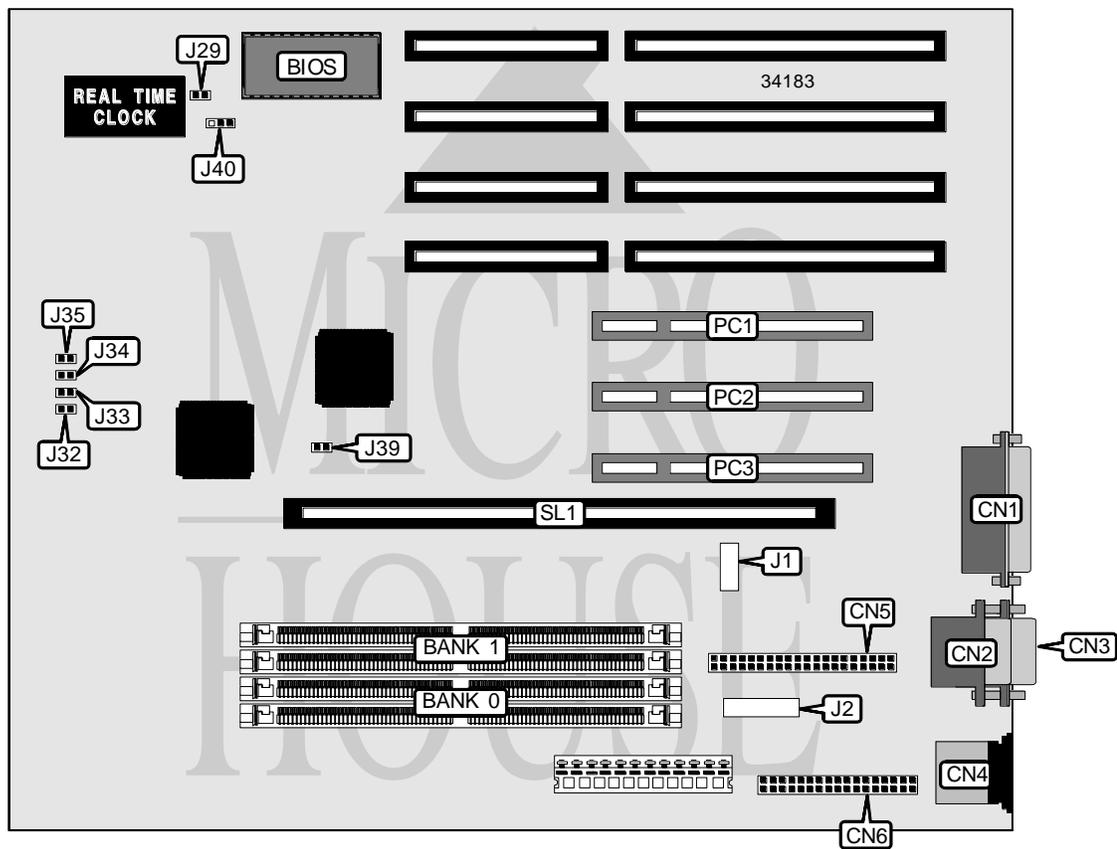

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 DECPC LPX 560/566

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	CN1	IDE interface	CN5
Serial port	CN2	Floppy drive interface	CN6
Serial port	CN3	CPU slot	SL1
PS/2 mouse port	CN4		


USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J1	Unidentified
í Factory configured - do not alter	J2	Unidentified
í CMOS memory normal operation	J29	Open
CMOS memory clear	J29	Closed
í Password normal operation	J32	Open
Password clear	J32	Closed
í Monitor type select monochrome	J33	Open
Monitor type select color	J33	Closed
í Flash BIOS normal operation	J34	Open
Flash BIOS recovery mode	J34	Closed
í Flash BIOS upgrade enabled	J35	Closed
Flash BIOS disabled	J35	Open
í CPU type select Intel	J39	Open
CPU type select Alpha	J39	Closed
Flash BIOS write protect disabled	J40	Pins 1 & 2 closed
Flash BIOS write protect enabled	J40	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
DECPC LPX 560/566

... continued from previous page

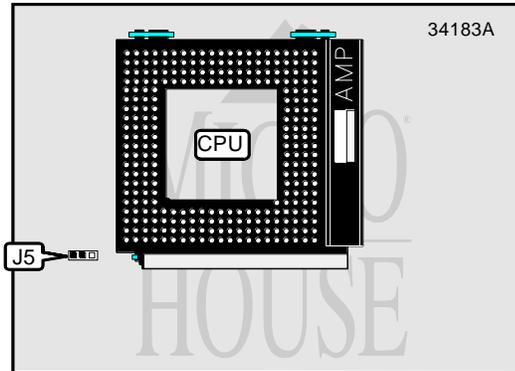

CPU CARD

CPU SPEED SELECTION	
Speed	J5
60MHz	Pins 2 & 3 closed
66MHz	Pins 1 & 2 closed