
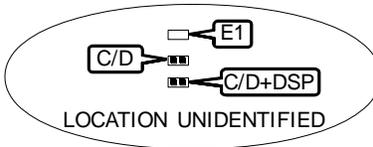


TANDY/RADIO SHACK 2500 RSX (2500-1620/1621)

Processor	80386SX
Processor Speed	25MHz
Chip Set	Unidentified
Video Chip Set	Accumos
Maximum Onboard Memory	9MB
Maximum Video Memory	512KB
Cache	None
BIOS	Unidentified
Dimensions	220mm x 220mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port, VGA port, riser slot
NPU Options	80387SX

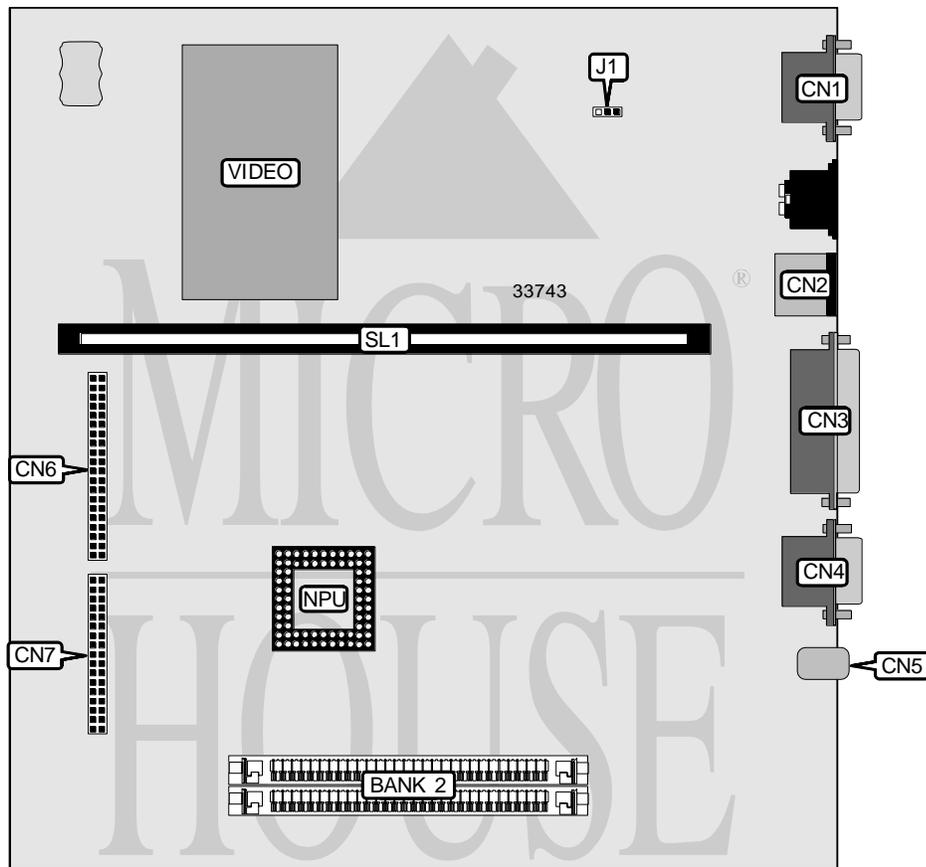

Continued on next page . . .

TANDY/RADIO SHACK

2500 RSX (2500-1620/1621)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Volume control	CN5
PS/2 mouse port	CN2	IDE interface	CN6
Parallel port	CN3	Floppy drive interface	CN7
Serial port	CN4	Riser slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	E1	Open
í On board video enabled	J1	Pins 1 & 2 closed
On board video disabled	J1	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0/1	Bank 2
1MB	1MB	None
3MB	1MB	(2) 1M x 9
9MB	1MB	(2) 4M x 9

Note: Bank 0/1 is factory installed and is not configurable. The location is unidentified.

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
256KB	256KB	None
512KB	256KB	256KB

Note: The location of banks 0 & 1 are unidentified. The size of the video memory chips are unidentified.

HARD DRIVE SELECTION		
Setting	C/D	C/D+DSP
1 drive installed	Closed	N/A
2 drives installed (primary)	N/A	Closed
2 drives installed (secondary)	N/A	Open