


TANDY/RADIO SHACK 3000HD (GATE ARRAY VERSION)

Processor	80286
Processor Speed	8MHz
Chip Set	C & T
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	462mm x 458mm
I/O Options	None
NPU Options	80287

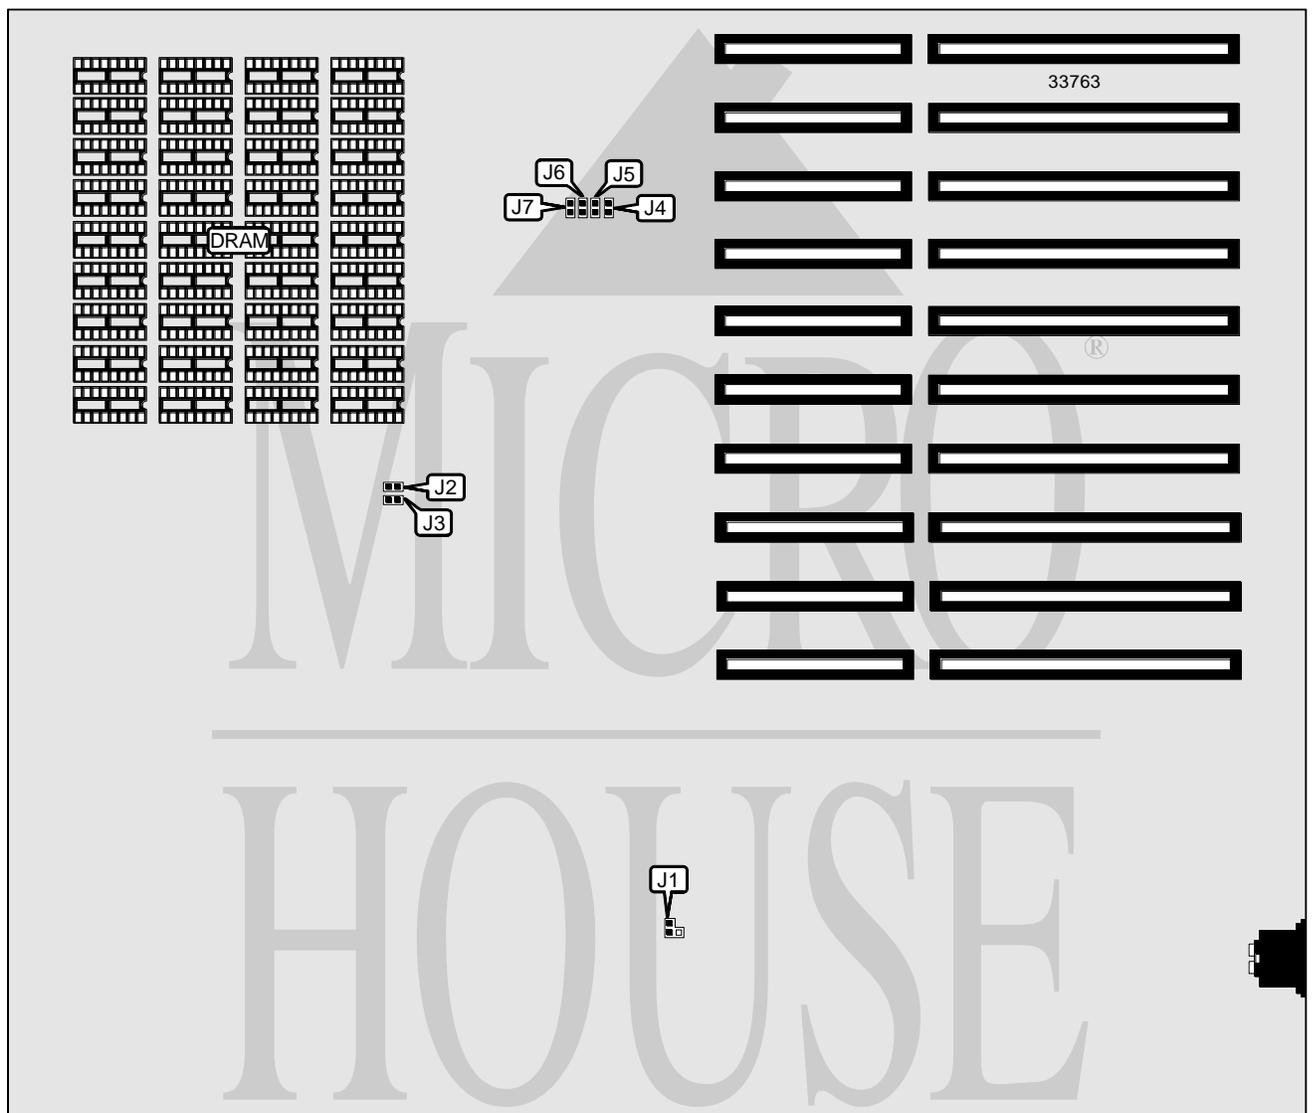

Continued on next page. . .

TANDY/RADIO SHACK 3000 (GATE ARRAY VERSION)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select monochrome	J1	Pins 2 & 3 closed
Monitor type select color	J1	Pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	None
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256

Note: The location of banks 0 & 1 are unidentified.

DRAM JUMPER CONFIGURATION		
Size	J2	J3
512KB	Closed	Open
640KB	Open	Closed
1MB	Open	Open

BIOS SELECTION				
Type	J4	J5	J6	J7
16KB	Closed	Open	Closed	Open
32KB (not used)	Open	Closed	Open	Closed