


# EVERSOURCE COMPUTERS, INC.

## USA386

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33/40MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	64/128/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	3167

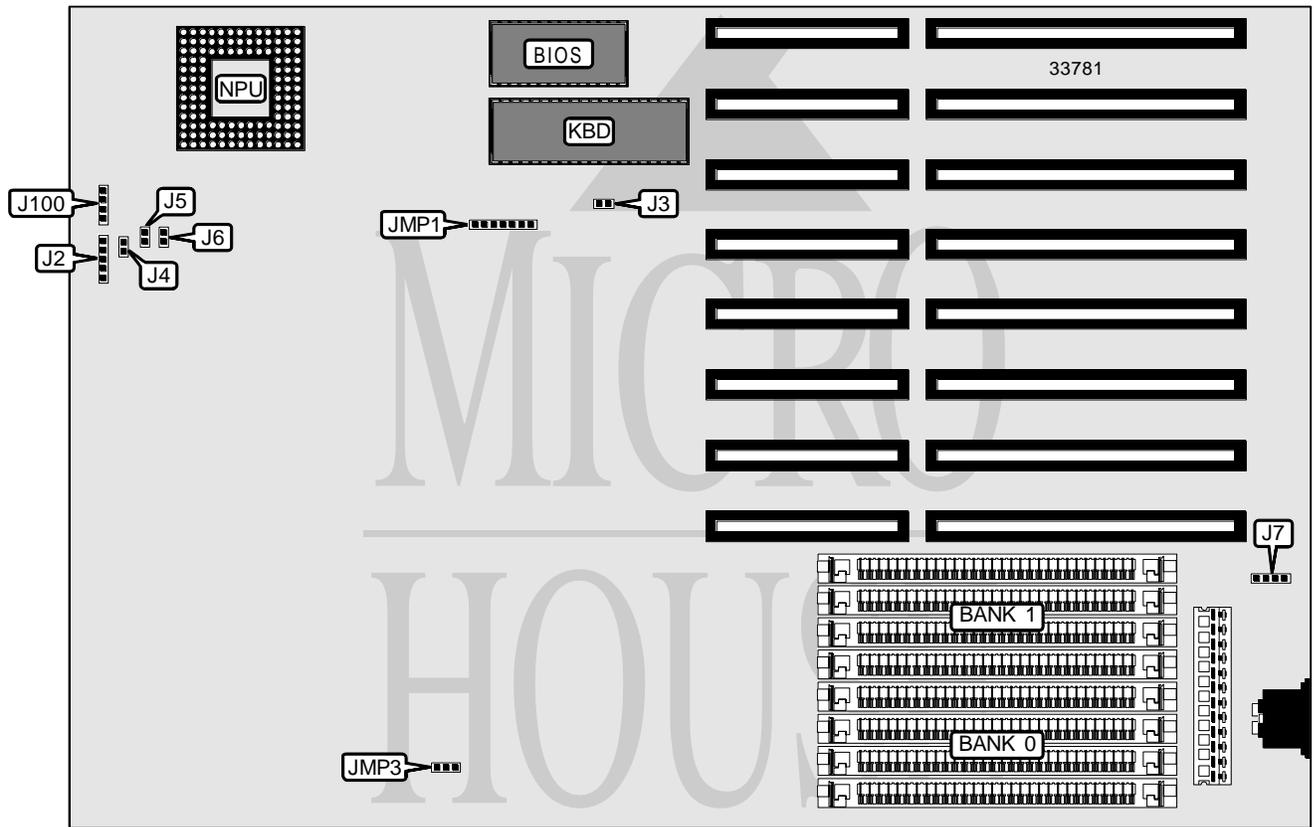

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J2	Reset switch	J6
Turbo switch	J4	External battery	J7
Turbo LED	J5	Speaker	J100

*Continued on next page . . .*

**EVERSOURCE COMPUTERS, INC.**  
**USA 3 8 6**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Monitor type select color	J3	Closed
Monitor type select monochrome	J3	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	None	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

Note: The location of banks 0 & 1 and TAG are unidentified.

CACHE JUMPER CONFIGURATION		
Size	JMP1	JMP3
64KB	Pins 1 & 2, 4 & 5, 6 & 7 closed	Pins 1 & 2 closed
128KB	Pins 2 & 3, 5 & 6 closed	Pins 2 & 3 closed
256KB	Pins 2 & 3 closed	Pins 2 & 3 closed