


COMPAQ COMPUTER CORPORATION DESKPRO 2000 (PENTIUM)

Processor	Pentium
Processor Speed	100/120/133/166/200MHz
Chip Set	Unidentified
Video Chip Set	Cirrus Logic
Maximum Onboard Memory	128MB (EDO supported)
Maximum Video Memory	1MB
Cache	256KB
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot, cache slot
NPU Options	None

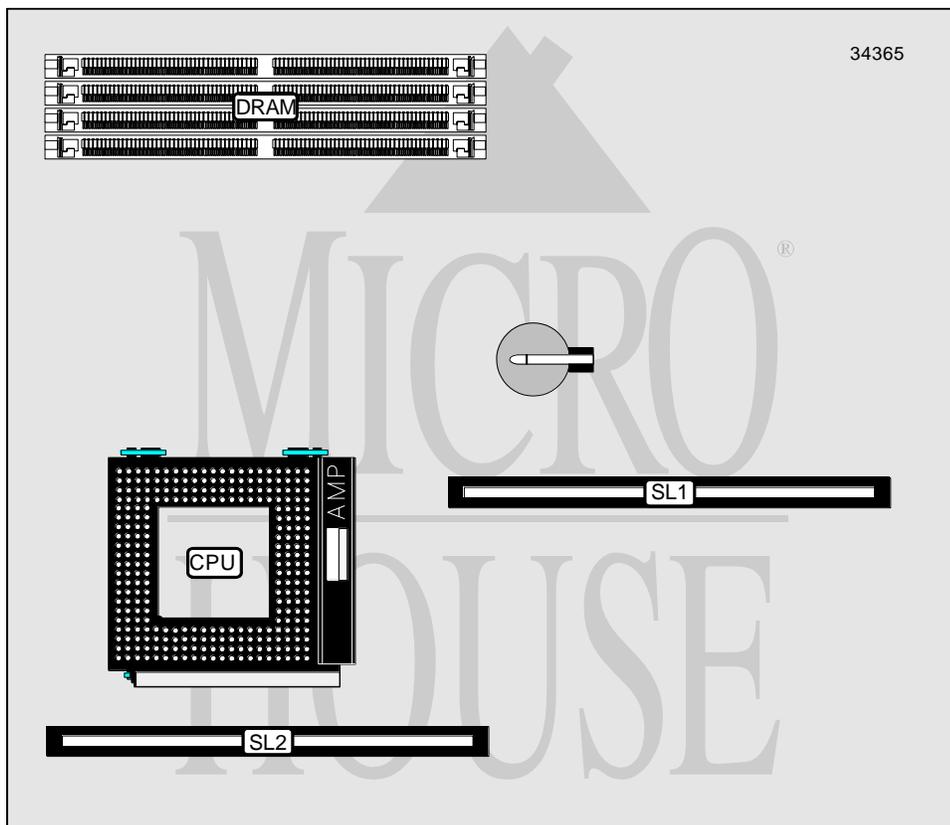

THE LOCATION OF ALL JUMPERS AND I/O CONNECTORS ARE UNIDENTIFIED

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	E9	Cache slot	SL2
Riser slot	SL1		

Continued on next page . . .

COMPAQ COMPUTER CORPORATION
DESKPRO 2000 (PENTIUM)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Password enabled	E6	Pins 5 & 6 closed
Password disabled	E6	Pins 6 & 7 closed
í CMOS memory normal operation	E8	Open
CMOS memory clear	E8	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
16MB	(2) 2M x 36	None
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

Note: The location of banks 0 & 1 are unidentified.

CACHE CONFIGURATION	
Size	SL2
256KB	256KB module installed

VIDEO MEMORY CONFIGURATION
Note: The location of the video memory is unidentified.

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	S1/1	S1/2	S1/3	S1/4
100MHz	66MHz	1.5x	Off	On	Off	Off
120MHz	60MHz	2x	On	Off	On	Off
133MHz	66MHz	2x	Off	On	On	Off
166MHz	66MHz	2.5x	Off	On	On	On
200MHz	66MHz	3x	Off	On	Off	On