


# OLIVETTI M 18 P

<b>Processor</b>	8088
<b>Processor Speed</b>	Unidentified
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	512KB
<b>Maximum Video Memory</b>	Unidentified
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	Floppy drive interface, parallel port, serial ports (3), light pen connector, VGA port
<b>NPU Options</b>	8087

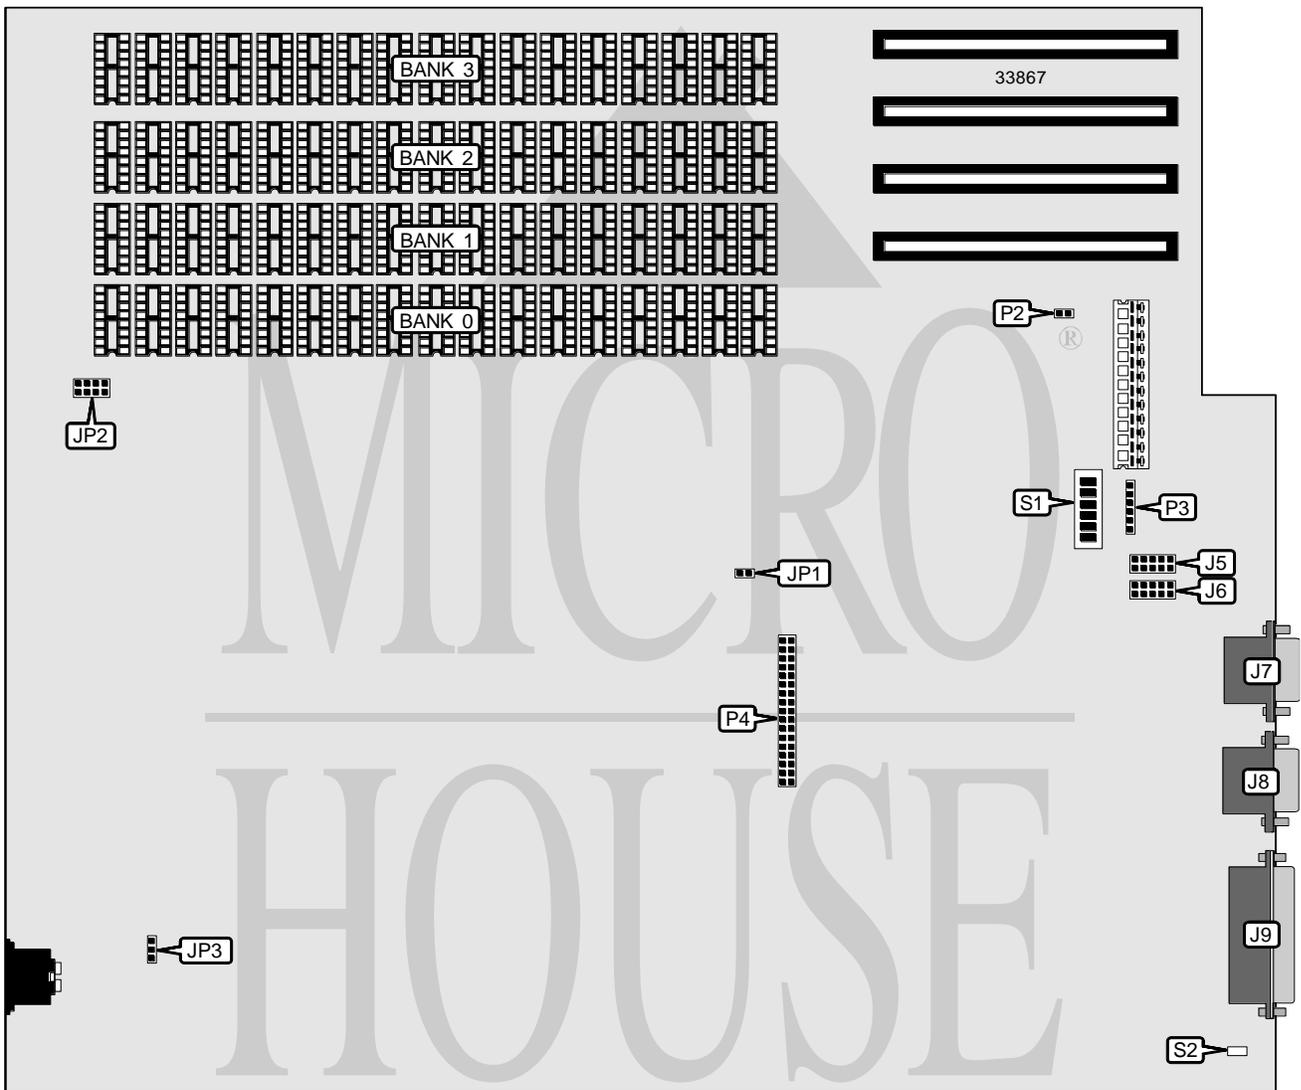

Continued on next page. . .

# OLIVETTI M 1 8 P

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	P2	VGA port	J7
Light pen connector	P3	Serial port	J8
Floppy drive interface	P4	Parallel port	J9
Serial port	J5	Reset switch	S2
Serial port	J6		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
BIOS type select 8KB	JP1	Closed
BIOS type select 16KB	JP1	Open
Graphics memory located in second 256KB	JP2	Pins 1 & 3 closed
Graphics memory located in first 256KB	JP2	Pins 2 & 4 closed
Keyboard voltage select 12v	JP3	Pins 1 & 2 closed
Keyboard voltage select 5v	JP3	Pins 2 & 3 closed
NPU not installed	S1/1	On
NPU installed	S1/1	Off
Floppy drives installed 1	S1/2	On
Floppy drives installed 2	S1/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
128KB	128KB	None	None	None
256KB	128KB	128KB	None	None
384KB	128KB	128KB	128KB	None
512KB	128KB	128KB	128KB	128KB

Note: The size of the memory chips are unidentified.

DRAM SWITCH CONFIGURATION		
Size	S1/5	S1/6
128KB	On	On
256KB	Off	On
384KB	On	Off
512KB	Off	Off

MONITOR SELECTION		
Setting	S1/3	S1/4
None	On	On
color (40 x 25)	Off	On
Color (80 x 25)	On	Off
Monochrome	Off	Off