


# DIGITAL EQUIPMENT CORPORATION P 2 1 2 0 C E

<b>Processor</b>	8088
<b>Processor Speed</b>	4.77/10MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	ATI
<b>Maximum Onboard Memory</b>	768KB
<b>Maximum Video Memory</b>	Unidentified
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, serial ports (2), VGA port, riser slot
<b>NPU Options</b>	8087

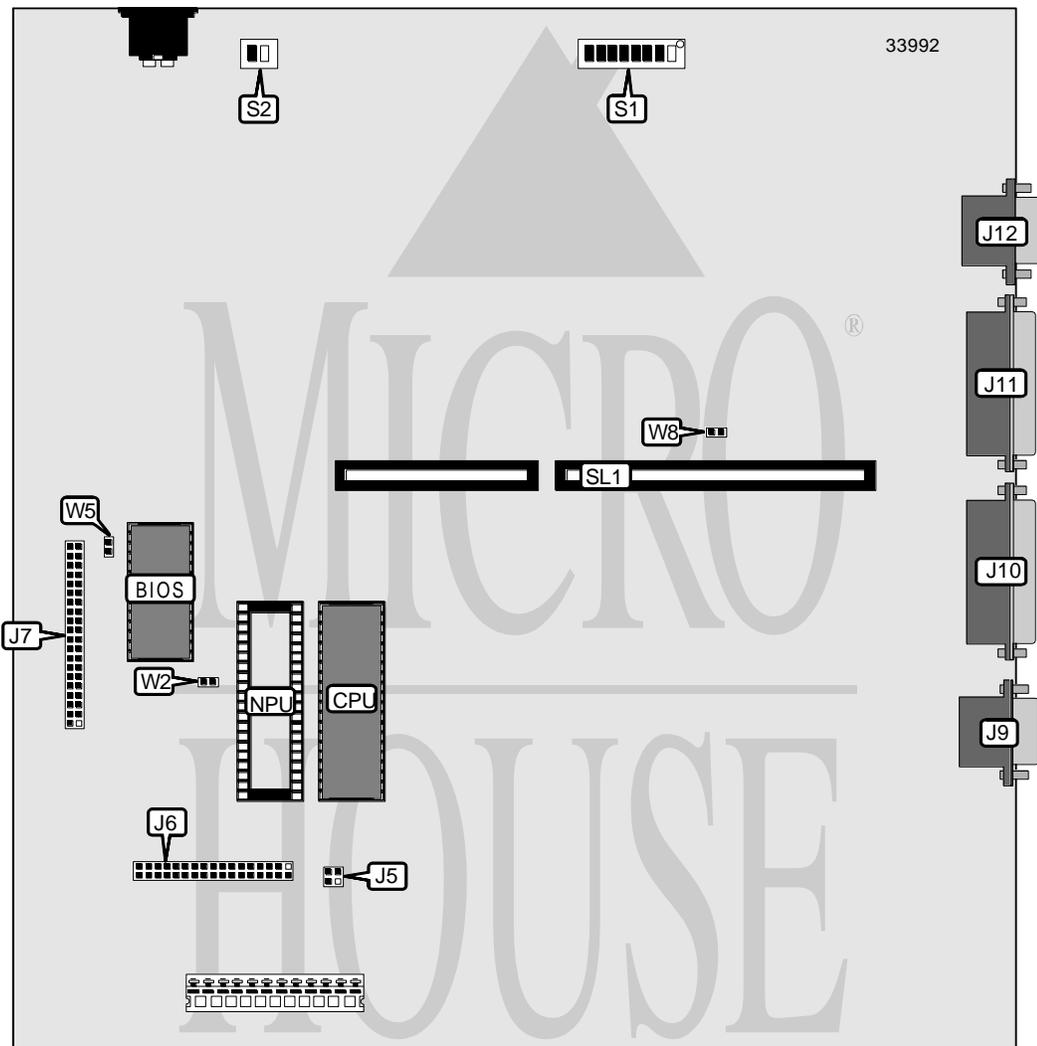

Continued on next page. . .

# DIGITAL EQUIPMENT CORPORATION

## P 2 1 2 0 C E

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy/hard drive power interface	J5	Serial port	J10
Floppy drive interface	J6	Parallel port	J11
IDE interface	J7	VGA port	J12
Serial port	J9	Riser slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
NPU not installed	S1/1	On
NPU installed	S1/1	Off
One floppy drive installed	S1/2	On
Two floppy drives installed	S1/2	Off
Parity chips installed	S1/3	On
Parity chips not installed	S1/3	Off
On board video enabled	S1/4	On
On board video disabled	S1/4	Off
Parallel port enabled	S1/5	On
Parallel port disabled	S1/5	Off
Serial port 2 enabled	S1/6	On
Serial port 2 disabled	S1/6	Off
Serial port 1 enabled	S1/7	On
Serial port 1 disabled	S1/7	Off
IDE interface enabled	S1/8	On
IDE interface disabled	S1/8	Off
Monochrome mode using a color monitor	S2/1	On
Color mode using a monochrome monitor	S2/1	Off
Monitor type select color	S2/2	On
Monitor type select monochrome	S2/2	Off
Manufacturing mode disabled	W8	Open
Manufacturing mode enabled	W8	Closed

DRAM CONFIGURATION
Note: Board is factory installed with 768KB and is not configurable.

BIOS SELECTION		
Size	W2	W5
8KB	Open	Open
16KB	Open	Open
32KB	Open	Closed
64KB	Closed	Closed