


TMC RESEARCH CORPORATION

TI5TT (VER. 1.0B)

Processor	CX M1/AM K5/AM K6/Pentium
Processor Speed	90/100/120/133/150/166/200/233MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	256MB (EDO supported)
Maximum Video Memory	None
Cache	256/512KB
BIOS	Award
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connector, ATX power connector
NPU Options	None

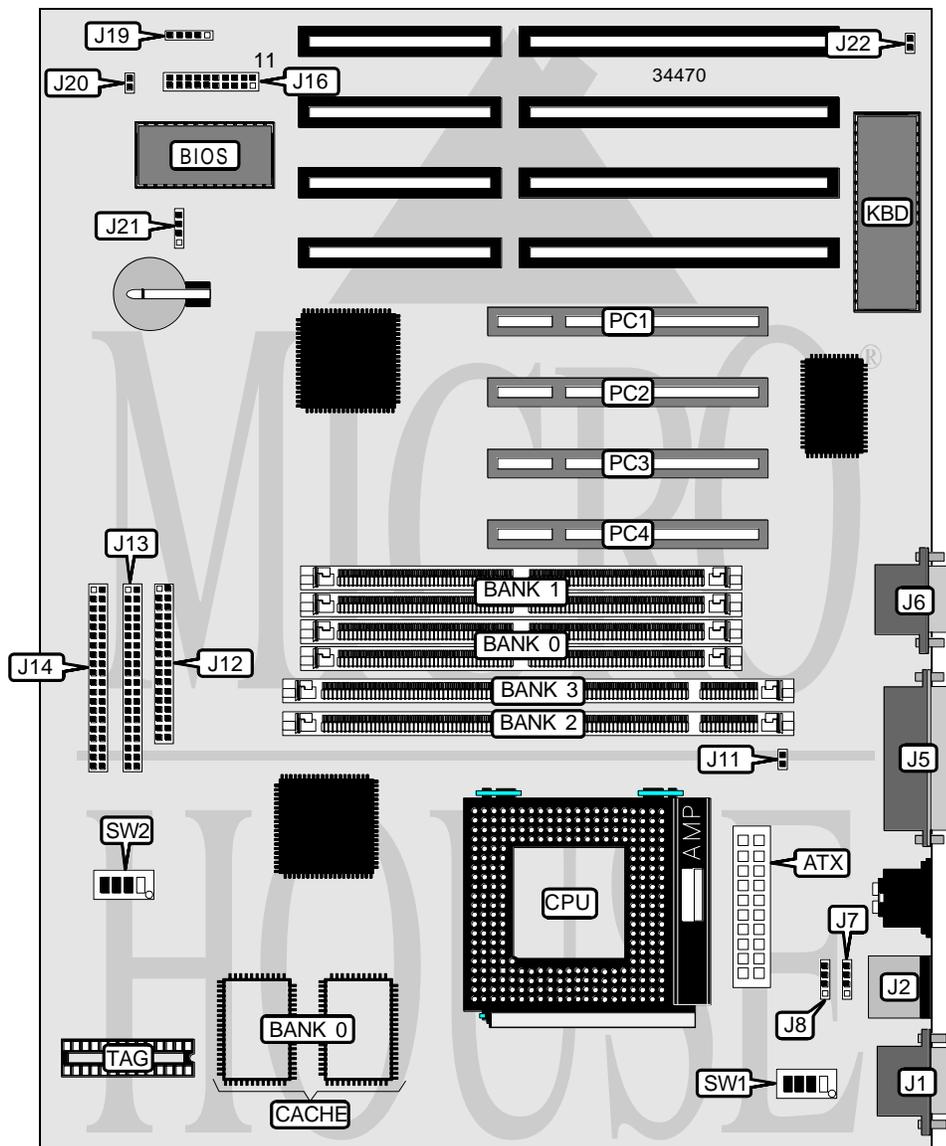

Continued on next page . . .

TMC RESEARCH CORPORATION
 TI5TT (VER. 1.0B)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Speaker	J16/pins 1 & 4
Serial port 1	J1	Green PC connector	J16/pins 6 & 16
PS/2 mouse port	J2	Turbo LED	J16/pins 8 & 18
Parallel port	J5	Reset switch	J16/pins 9 & 19
Serial port 2	J6	IDE interface LED	J16/pins 10 & 20
USB connector	J7	Power LED & keylock	J16/pins 11 & 15
USB connector	J8	IR connector	J19
Chassis fan power	J11	Soft off power supply	J20
Floppy drive interface	J12	External battery	J21
IDE interface 2	J13	32-bit PCI slots	PC1 – PC4
IDE interface 1	J14		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Battery type select internal	J21	Pins 1 & 2 closed
Battery type select external	J21	Open
CMOS memory normal operation	J22	Open
CMOS memory clear	J22	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36

Note: Board accepts EDO memory.

Continued on next page...

TMC RESEARCH CORPORATION
 TI5TT (VER. 1.0B)

... continued from previous page

DIMM CONFIGURATION		
Size	Bank 2	Bank 3
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64

CACHE CONFIGURATION		
Size	Bank 0	TAG
256KB	(2) 32K x 32	Unidentified
512KB	(2) 64K x 32	Unidentified

CPU SPEED SELECTION (CYRIX)						
CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
150MHz	60MHz	2x	On	On	On	Off
166MHz	66MHz	2x	Off	Off	On	Off

CPU SPEED SELECTION (AM K5)						
CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
100MHz	66MHz	1.5x	Off	Off	Off	Off
133MHz	66MHz	1.5x	Off	Off	On	Off
166MHz	66MHz	1.75x	Off	Off	On	On

CPU SPEED SELECTION (AM K6)						
CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
166MHz	66MHz	1.75x	Off	Off	On	On
200MHz	66MHz	3x	Off	Off	Off	On
233MHz	66MHz	3.5x	Off	Off	Off	Off

Continued on next page...

TMC RESEARCH CORPORATION
 TI5TT (VER. 1.0B)

... continued from previous page

CPU SPEED SELECTION (INTEL)						
CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
90MHz	60MHz	1.5x	On	On	Off	Off
100MHz	66MHz	1.5x	Off	Off	Off	Off
120MHz	60MHz	2x	On	On	On	Off
133MHz	66MHz	2x	Off	Off	On	Off
150MHz	60MHz	2.5x	On	On	On	On
166MHz	66MHz	2.5x	Off	Off	On	On
200MHz	66MHz	3x	Off	Off	Off	On
233MHz	66MHz	3.5x	Off	Off	Off	Off

CPU VOLTAGE SELECTION (SINGLE)				
Voltage	SW1/1	SW1/2	SW1/3	SW1/4
3.5v	On	On	On	On

CPU VOLTAGE SELECTION (DUAL)					
Voltage	V core	SW1/1	SW1/2	SW1/3	SW1/4
3.3v	2.5v	On	Off	On	Off
3.3v	2.6v	Off	On	On	Off
3.3v	2.7v	On	On	On	Off
3.3v	2.8v	Off	Off	Off	On
3.3v	2.9v	On	Off	Off	On
3.3v	3.0v	Off	On	Off	On
3.3v	3.2v	Off	Off	On	On
3.3v	3.5v	On	On	On	On