


# RINGO TECHNOLOGY, INC.

## RT386SX-2

<b>Processor</b>	80386SX
<b>Processor Speed</b>	20MHz
<b>Chip Set</b>	C & T
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	8MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Award
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	None

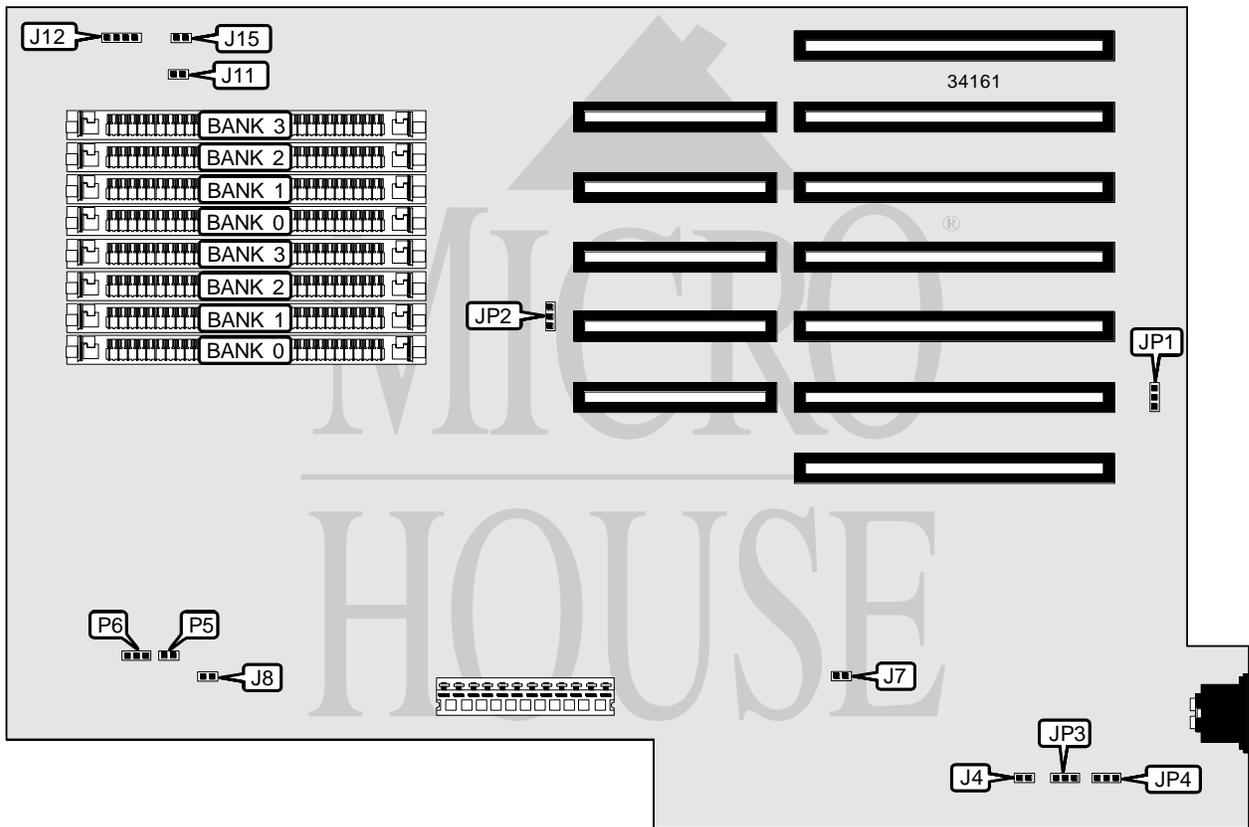

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	P5	Power LED & keylock	P6

*Continued on next page. . .*

# RINGO TECHNOLOGY, INC.

## RT386SX-2

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select color	J4	Closed
Monitor type select monochrome	J4	Open
í NPU not installed	J7	Closed
NPU installed	J7	Open
í Factory configured - do not alter	J8	Closed
í Factory configured - do not alter	J11	Open
í Factory configured - do not alter	J12	Open
í Factory configured - do not alter	J15	Closed
í Battery type select internal	JP1	Pins 1 & 2 closed
CMOS memory clear	JP1	Pins 2 & 3 closed
í Factory configured - do not alter	JP2	Pins 2 & 3 closed
í Factory configured - do not alter	JP3	Pins 1 & 2 closed
í Factory configured - do not alter	JP4	Pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	None	None
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	None	None	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 1M x 9			