


EVEREX SYSTEMS, INC.

STEP 486

Processor	80486SX
Processor Speed	25/33MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	32MB (on external memory card)
Maximum Video Memory	None
Cache	Unidentified
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	External memory card, parallel port, serial ports (2)
NPU Options	4167

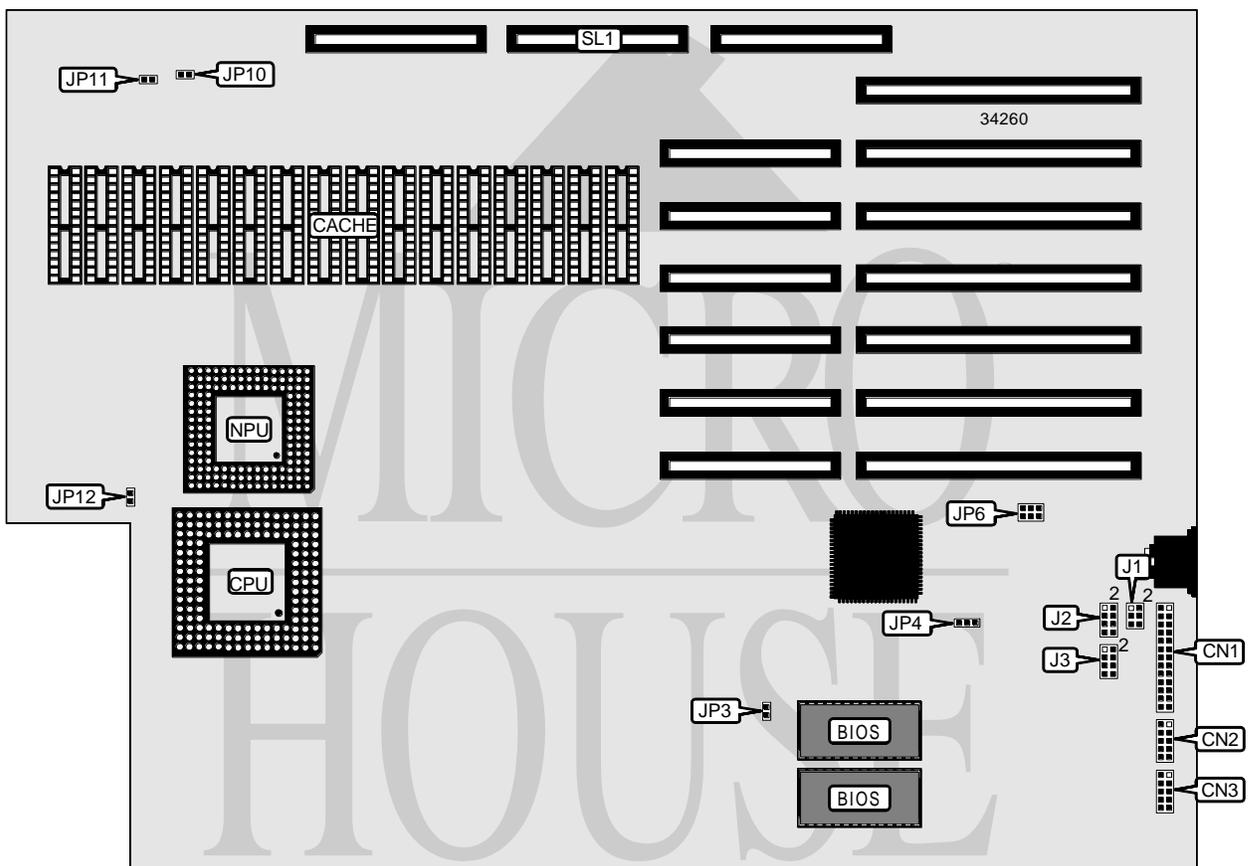

Continued on next page. . .

EVEREX SYSTEMS, INC.
STEP 486

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	CN1	Serial port 2	CN3
Serial port 1	CN2	External memory card	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP3	Open
í Factory configured - do not alter	JP4	Pins 2 & 3 closed
í Factory configured - do not alter	JP6	Open
í Factory configured - do not alter	JP10	Open
í Factory configured - do not alter	JP11	Open
í Factory configured - do not alter	JP12	Open

CACHE CONFIGURATION
Note: The size of the cache is unidentified.

SERIAL PORT INTERRUPT SELECTION		
IRQ	J2	J3
IRQ3	Pins 3 & 4 closed	Pins 3 & 4 closed
IRQ4	Pins 5 & 6 closed	Pins 5 & 6 closed
IRQ5	Pins 7 & 8 closed	Pins 7 & 8 closed
IRQ9	Pins 1 & 2 closed	Pins 1 & 2 closed


Note: Port 1 interrupts are set by one jumper and Port 2 interrupts are set by the other jumper. The correspondence between ports and jumpers is unidentified.

PARALLEL PORT INTERRUPT SELECTION	
IRQ	J1
IRQ5	Pins 3 & 4 closed
IRQ7	Pins 5 & 6 closed
IRQ9	Pins 1 & 2 closed

Continued on next page...

EVEREX SYSTEMS, INC.
 STEP 486

... continued from previous page

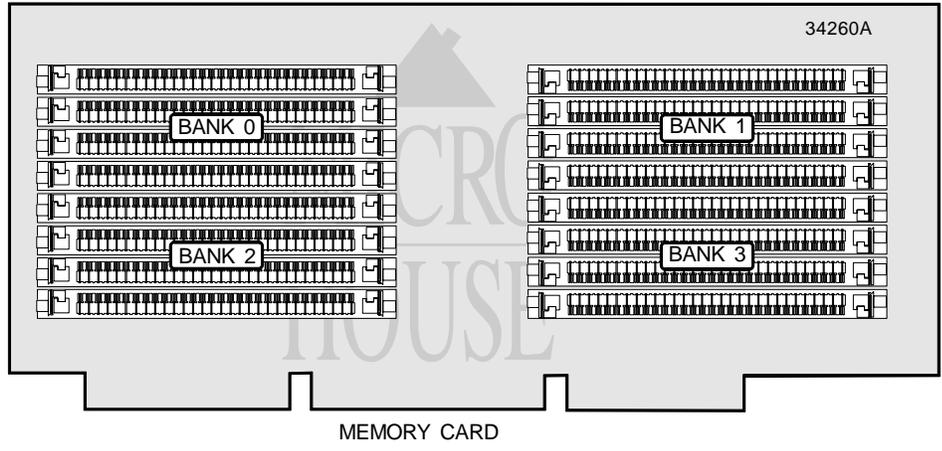

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(4) 256K x 9			
4MB	(4) 1M x 9	None	None	None
8MB	(4) 1M x 9	(4) 1M x 9	None	None
16MB	(4) 1M x 9			
16MB	(4) 4M x 9	None	None	None
32MB	(4) 4M x 9	(4) 4M x 9	None	None