


EVEREX SYSTEMS, INC.  
STEP 386/20

<b>Processor</b>	80386
<b>Processor Speed</b>	20MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	16MB (8MB located on memory card)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	Unidentified
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	External memory card
<b>NPU Options</b>	80387

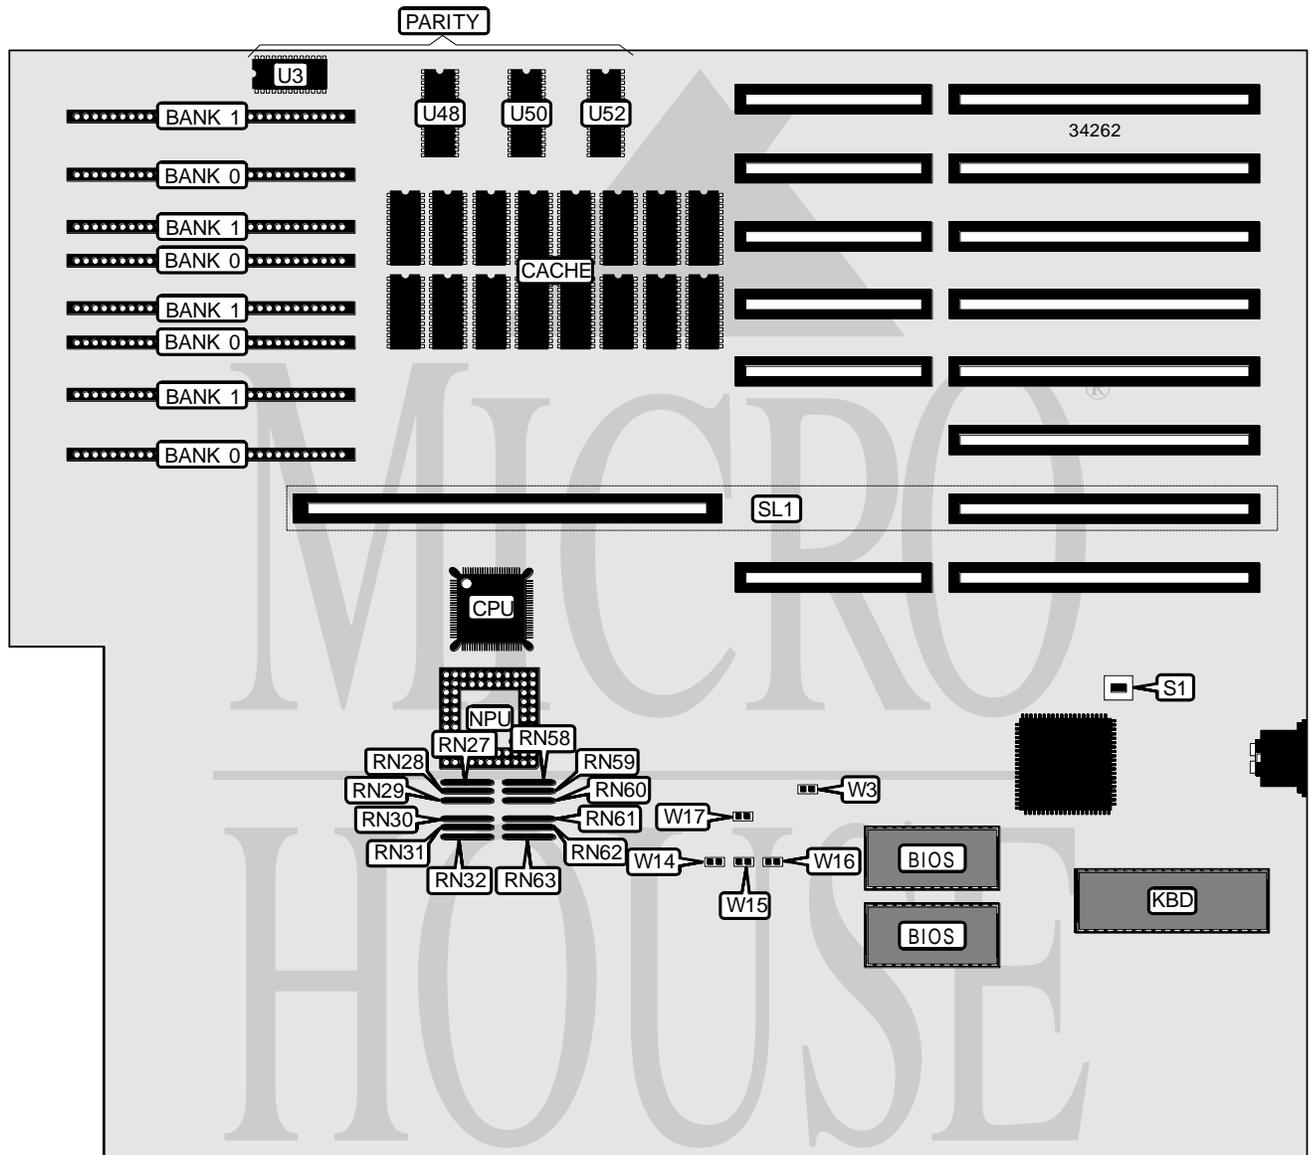

Continued on next page. . .

... continued from previous page

CONNECTIONS	
Purpose	Location
External memory card	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Color/mono switch	S1	Unidentified
NPU not installed	W3	Open
NPU installed	W3	Closed
Step Up not installed	W14	Closed
Step Up installed	W14	Open
Bus speed select 6.7MHz	W17	Closed
Bus speed select 10MHz	W17	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	None	None	None
2MB	(4) 256K x 9	(4) 256K x 9	None	None
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	None
4MB	(4) 256K x 9			
4MB	(4) 1M x 9	None	None	None
8MB	(4) 1M x 9	(4) 1M x 9	None	None
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	None
16MB	(4) 1M x 9			

Note: Banks 2 & 3 are located on the memory card. The size of the parity chips is unidentified.

DRAM BANK CONFIGURATION						
Banks used	RN27	RN28	RN29	RN30	RN31	RN32
1	Installed	Not installed	Not installed	Installed	Not installed	Not installed
2	Not installed	Installed	Not installed	Not installed	Installed	Not installed
4	Not installed	Not installed	Installed	Not installed	Not installed	Installed

DRAM BANK CONFIGURATION (CON'T)						
Banks used	RN58	RN59	RN60	RN61	RN62	RN63
1	Installed	Not installed	Not installed	Installed	Not installed	Not installed
2	Not installed	Installed	Not installed	Not installed	Installed	Not installed
4	Not installed	Not installed	Installed	Not installed	Not installed	Installed

SIMM SIZE CONFIGURATION	
Size	W15
256K x 9	Closed
1M x 9	Open

Continued on next page...

EVEREX SYSTEMS, INC.  
STEP 386/20

... continued from previous page

BASE MEMORY CONFIGURATION	
Size	W16
512KB	Closed
640KB	Open

CACHE CONFIGURATION
Note: The size of the cache is unidentified.