


# DELL COMPUTER CORPORATION OPTIPLEX GXA

<b>Processor</b>	Pentium II
<b>Processor Speed</b>	233/266/300MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	ATI
<b>Maximum Onboard Memory</b>	384MB (EDO & SDRAM supported)
<b>Maximum Video Memory</b>	4MB
<b>Cache</b>	512KB (located on Pentium II CPU)
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	305mm x 244mm
<b>I/O Options</b>	Ethernet connector, floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot, USB connectors (2), line in, line out, microphone in, audio in – CD-ROM
<b>NPU Options</b>	None

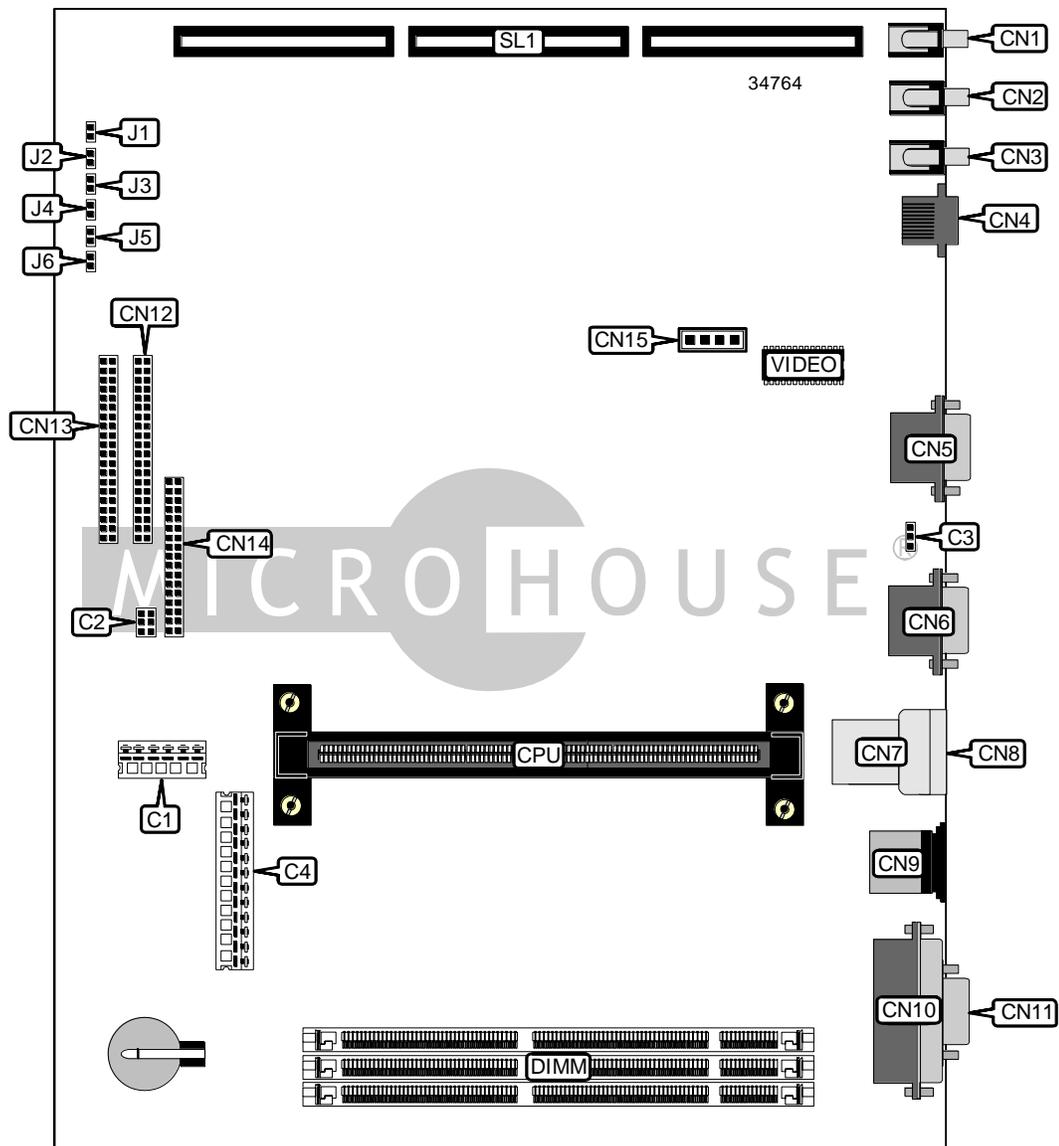

Continued on next page. . .

DELL COMPUTER CORPORATION  
OPTIPLEX GXA

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
3.3v auxiliary power	C1	USB connector 1	CN7
Front panel connector	C2	USB connector 2	CN8
Chassis fan power	C3	PS/2 mouse port	CN9
3.3v power	C4	Parallel port	CN10
Line in	CN1	Serial port 1	CN11
Line out	CN2	IDE interface 2	CN12
Microphone in	CN3	IDE interface 1	CN13
Ethernet connector	CN4	Floppy drive interface	CN14
VGA port	CN5	Audio in – CD-ROM	CN15
Serial port 2	CN6	Riser slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J1	Open
í Factory configured - do not alter	J5	Open
í Password enabled	J6	Closed
í Password disabled	J6	Open

DIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
80MB	(1) 8M x 64	(1) 2M x 64	None
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 16M x 64	(1) 2M x 64	None

Continued on next page. . .

DELL COMPUTER CORPORATION  
OPTIPLEX GX A

... continued from previous page

DIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
160MB	(1) 16M x 64	(1) 4M x 64	None
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board accepts EDO& SDRAM memory.

CACHE CONFIGURATION
Note: 512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION
Note: Board accepts 2MB/4MB video memory. The configuration is unidentified.

CPU SPEED SELECTION					
CPU speed	Clock speed	Multiplier	J2	J3	J4
233MHz	66MHz	3.5x	Open	Open	Closed
266MHz	66MHz	4x	Open	Closed	Open
300MHz	66MHz	4.5x	Closed	Open	Open