


GIGA-BYTE TECHNOLOGY CO., LTD.

GA - 6 8 6 K X

Device Type	Mainboard
Processor	Pentium II
Processor Speed	200/233/266/300/333/366MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	768MB (EDO & SDRAM supported)
Maximum Video Memory	None
Cache	256/512KB (located on Pentium II CPU)
BIOS	Award
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (5), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector
NPU Options	None

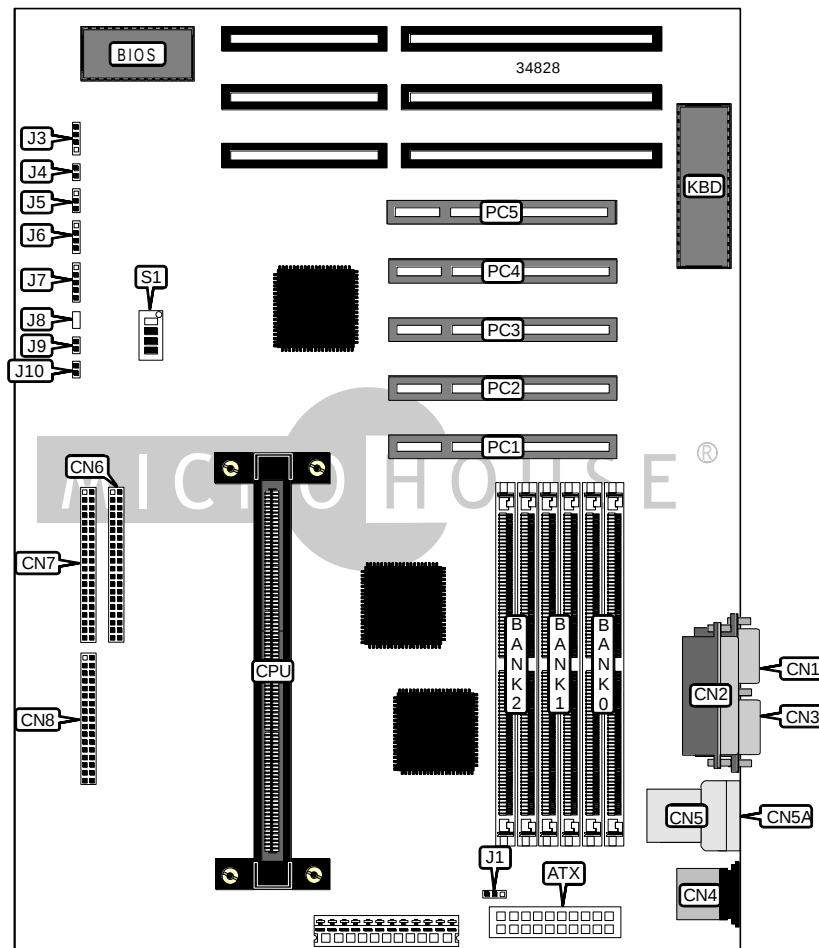

Continued on next page. . .

GIGA-BYTE TECHNOLOGY CO., LTD.
G A - 6 8 6 K X

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	CPU fan power	J1
Serial port 1	CN1	Speaker	J3
Parallel port	CN2	Reset switch	J4
Serial port 2	CN3	Power LED	J5
PS/2 mouse port	CN4	IDE interface LED	J6
USB connector 1	CN5	IR connector	J7
USB connector 2	CN5A	Soft off power supply	J9
IDE interface 2	CN6	Green PC LED	J10
IDE interface 1	CN7	32-bit PCI slots	PC1 – PC5
Floppy drive interface	CN8		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J8	Unidentified

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 8M x 36	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
128MB	(2) 16M x 36	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36	None
256MB	(2) 32M x 36	None	None
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36
512MB	(2) 32M x 36	(2) 32M x 36	None
768MB	(2) 32M x 36	(2) 32M x 36	(2) 32M x 36
Note: Board accepts EDO memory.			

Continued on next page...

GIGA-BYTE TECHNOLOGY CO., LTD.
G A - 6 8 6 K X

... continued from previous page

CACHE CONFIGURATION						
Note: 256KB/512KB cache is located on the Pentium II CPU.						

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	S1/1	S1/2	S1/3	S1/4
200MHz	66MHz	3x	Off	On	Off	Off
233MHz	66MHz	3.5x	On	On	Off	Off
266MHz	66MHz	4x	Off	Off	On	Off
300MHz	66MHz	4.5x	On	Off	On	Off
333MHz	66MHz	5x	Off	On	On	Off
366MHz	66MHz	5.5x	On	On	On	Off