


IBM CORPORATION INTELLISTATION Z PRO

Processor	Pentium Pro
Processor Speed	200MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1GB
Maximum Video Memory	None
Cache	256/512KB
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), riser slot, IR connector, VRM connector, USB connector, audio connectors (3), CD-ROM audio in, wake on modem connectors (2), wake on LAN connector
NPU Options	None

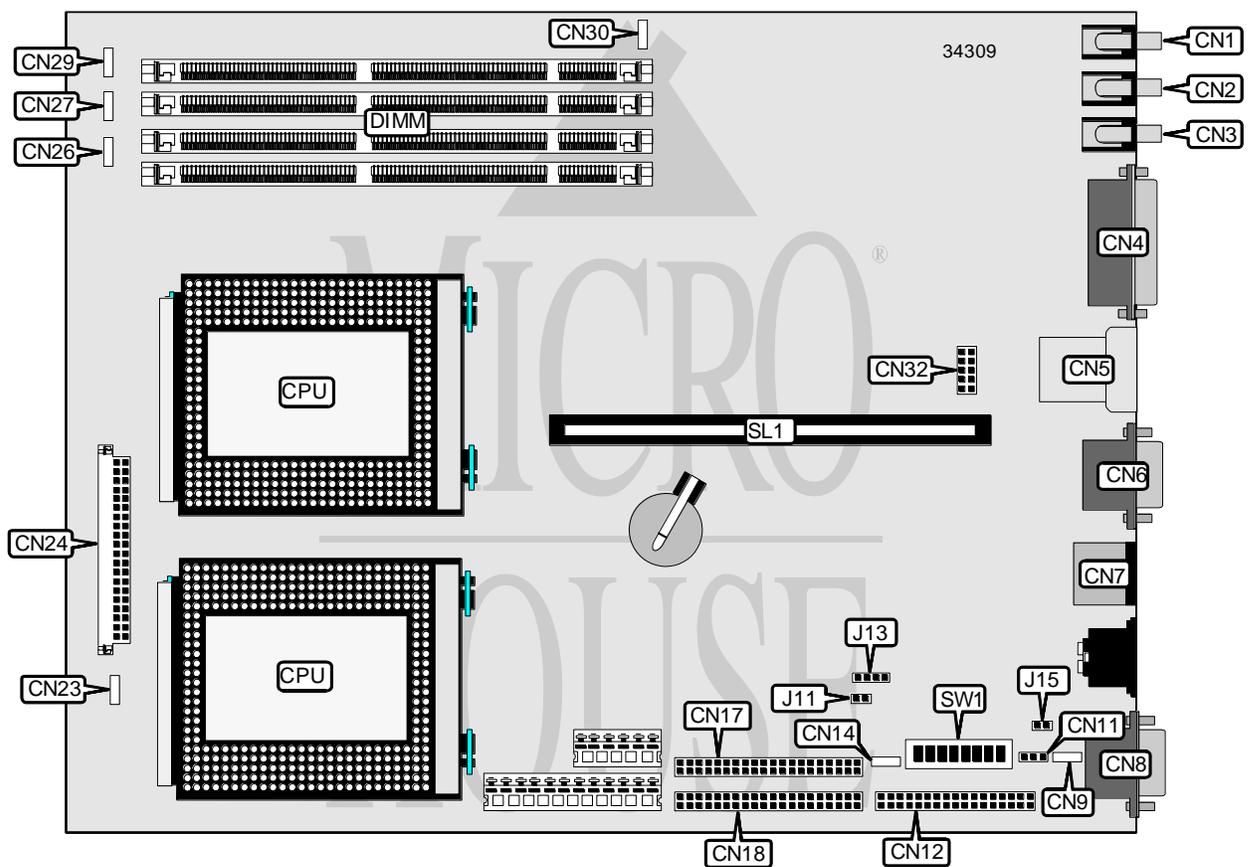

Continued on next page . . .

IBM CORPORATION INTELLISTATION Z PRO

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Audio in	CN1	IDE interface 2	CN18
Audio in	CN2	Chassis fan power	CN23
Audio in	CN3	VRM connector	CN24
Parallel port	CN4	Power LED	CN26
USB connector	CN5	Front panel connector	CN27
Serial port 1	CN6	Speaker	CN29
PS/2 mouse port	CN7	CD-ROM audio in	CN30
IR connector	CN8	Serial port 2	CN32
+5V auxiliary connector	CN9	Wake on modem connector	J11
Floppy drive interface	CN12	Wake on modem connector	J13
SCSI interface LED	CN14	Wake on LAN connector	J15
IDE interface 1	CN17	Riser slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
CMOS memory normal operation	CN11	Pins 1 & 2 closed
CMOS memory clear	CN11	Pins 2 & 3 closed
í Factory configured - do not alter	SW1/6	Unidentified
Serial port 2 enabled	SW1/7	On
Serial port 2 disabled	SW1/7	Off
Floppy drive write protect disabled	SW1/8	Off
Floppy drive write protect enabled	SW1/8	On

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 4M x 64	None	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 8M x 64	None	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 16M x 64	None	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64

Continued on next page. . .

IBM CORPORATION
 INTELLISTATION Z PRO

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 32M x 64	None	None	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
512MB	(1) 16M x 64			
512MB	(1) 32M x 64	(1) 32M x 64	None	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1GB	(1) 32M x 64			

Note: The location of the banks is unidentified.

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium Pro CPU.

CPU SPEED SELECTION					
CPU speed	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
200MHz	On	Off	On	On	Off