


COMPAQ COMPUTER CORPORATION

PRESARIO 6700/8700

Processor	Pentium
Processor Speed	166/200MHz
Chip Set	Unidentified
Video Chip Set	S3
Maximum Onboard Memory	32MB
Maximum Video Memory	2MB
Cache	256KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Riser slot, cache slot
NPU Options	None

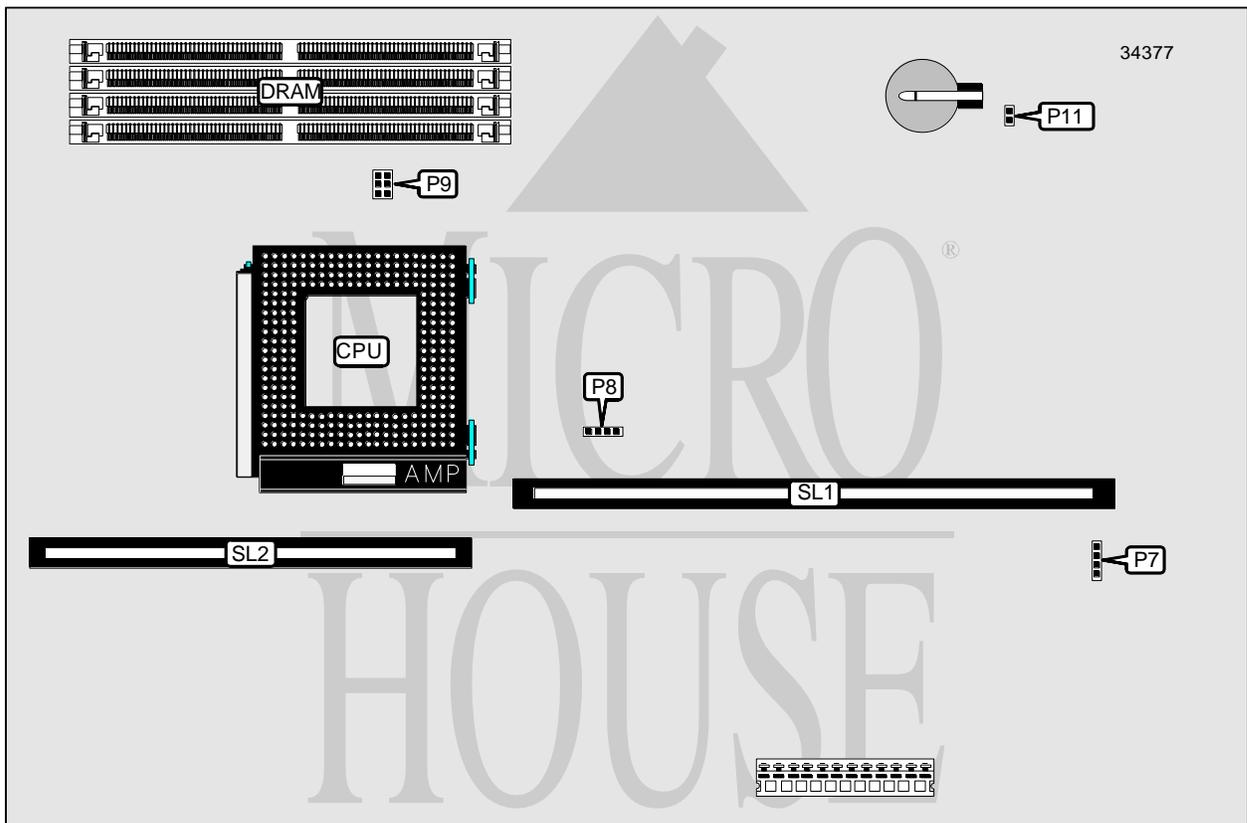

THE LOCATION OF MOST JUMPERS AND I/O CONNECTORS ARE UNIDENTIFIED

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	P7	Cache slot	SL2
Riser slot	SL1		
Note: The location and types of all other I/O options are unidentified.			

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
 PRESARIO 6700/8700

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Label	Position
í CMOS memory normal operation	P11	Closed
CMOS memory clear	P11	Open

DRAM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36

Note: Board accepts EDO memory.

CACHE CONFIGURATION

Size	TAG
256KB	256KB module installed

VIDEO MEMORY CONFIGURATION

Note: Board is factory installed with 1MB. A 1MB upgrade is available. The location is unidentified.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	P8	P9
166MHz	66MHz	2.5x	3 & 4	A2 & A3, B2 & B3
200MHz	66MHz	3x	3 & 4	A1 & A2, B1 & B2

Note: Pins designated should be in the closed position.