


COMPAQ COMPUTER CORPORATION

DESKPRO 4000/6000 (PENTIUM)

Processor	Pentium
Processor Speed	100/120/133/166/200MHz
Chip Set	Unidentified
Video Chip Set	Cirrus Logic
Maximum Onboard Memory	256MB
Maximum Video Memory	2MB
Cache	256/512KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Unidentified
NPU Options	None

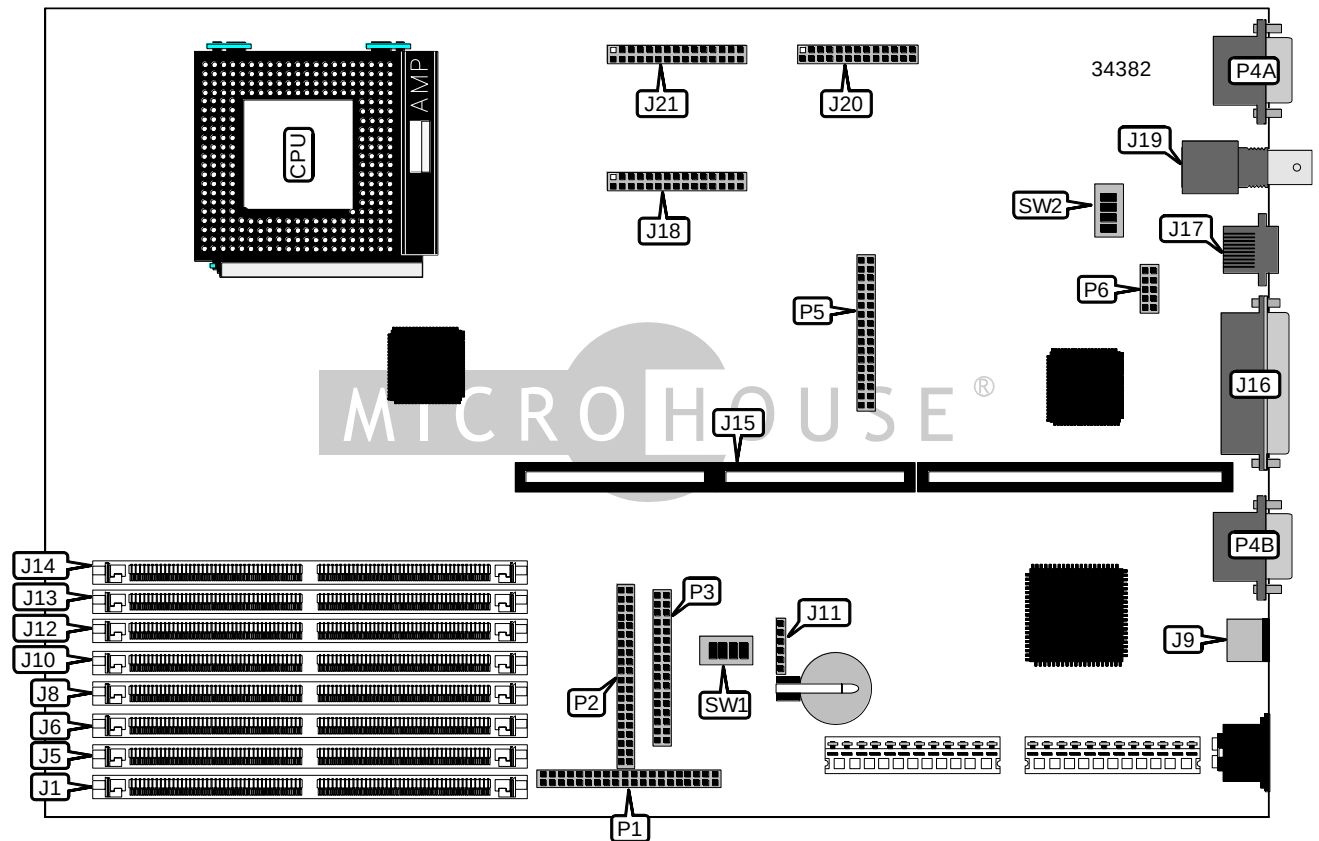

Continued on next page. . .

COMPAQ COMPUTER CORPORATION

DESKPRO 4000/6000 (PENTIUM)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface 2	P1	Replacement battery	J11
IDE interface 1	P2	Riser slot	J15
Floppy drive interface	P3	Parallel port	J16
Serial port 1	P4A	RJ-45 Ethernet port	J17
Serial port 2	P4B	BNC Ethernet port	J19
100 Mbit/s upgrade module	P5, P6	Graphics memory expansion	J18, J21
IR connector	J2	32-bit VESA local bus slots	J20
PS/2 mouse port	J9		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured – do not alter	J11	Unidentified
í Power on password enabled	SW1/1	Off
Power on password disabled	SW1/1	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
16MB	(2) 2M x 36	None	None	None
32MB	(2) 2M x 36	(2) 2M x 36	None	None
32MB	(2) 4M x 36	None	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	None
64MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None	None
64MB	(2) 8M x 36	None	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36	None
128MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	None
256MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36	None	None

CACHE CONFIGURATION
Note: The location of the cache is unidentified.

VIDEO MEMORY CONFIGURATION
Note: The location of the video memory is unidentified.

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
DESKPRO 4000/6000 (PENTIUM)

... continued from previous page

CPU SPEED SELECTION					
CPU speed	Clock speed	Multiplier	SW1/2	SW1/3	SW1/4
100MHz	66MHz	1.5x	Off	Off	On
120MHz	60MHz	2x	On	Off	Off
133MHz	66MHz	2x	On	Off	On
166MHz	66MHz	2.5x	On	On	On
200MHz	66MHz	3x	Off	On	On

NETWORK SELECTION				
Setting	SW2/1	SW2/2	SW2/3	SW2/4
10MB	On	On	On	On
100MB	Off	Off	Off	Off