


DIGITAL EQUIPMENT CORPORATION

CELEBRIS GL (VER. 2), VENTURIS GL (VER. 2)

Processor	Pentium Pro
Processor Speed	150/166/180/200/210/233/240/266MHz
Chip Set	Intel
Video Chip Set	Matrox
Maximum Onboard Memory	192MB
Maximum Video Memory	1MB
Cache	256/512KB (located on Pentium Pro CPU)
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options (Backplane)	Parallel port, PS/2 mouse port, serial ports (2), USB connectors (2), VGA port, feature connector, VRM connector
I/O Options (CPU)	32-bit PCI slots (2), IDE interfaces (2), game/MIDI port, floppy drive interface
NPU Options	None

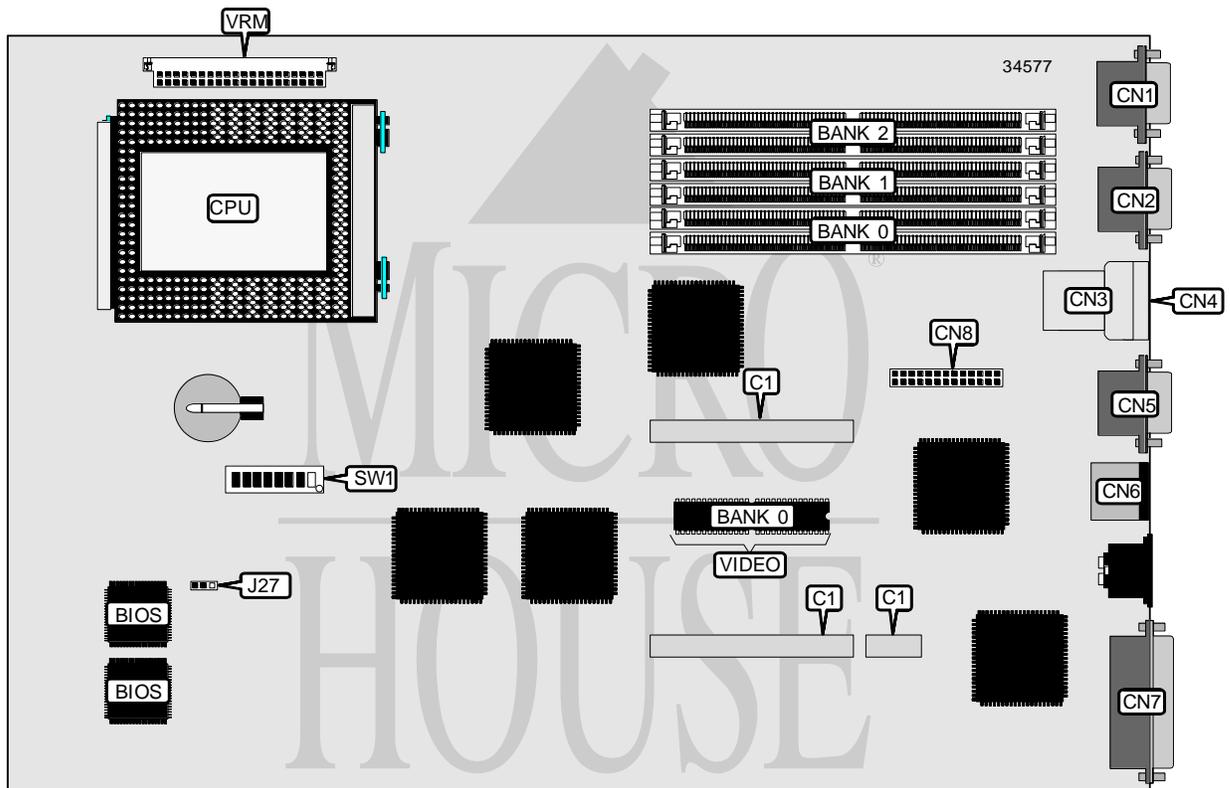

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS GL (VER. 2), VENTURIS GL (VER. 2)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port	CN1	PS/2 mouse port	CN6
Serial port	CN2	Parallel port	CN7
USB connector	CN3	VGA feature connector	CN8
USB connector	CN4	VRM connector	VRM
VGA port	CN5		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Boot block update disabled	J27	Pins 1 & 2 closed
Boot block update enabled	J27	Pins 2 & 3 closed
í Password normal operation	SW1/5	Off
Password clear	SW1/5	On
í Recovery mode disabled	SW1/6	Off
Recovery mode enabled	SW1/6	On
í CMOS memory normal operation	SW1/7	Off
CMOS memory clear	SW1/7	On
í Factory configured - do not alter	SW1/8	Off

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 1M x 36	(2) 1M x 36	(2) 2M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
40MB	(2) 1M x 36	(2) 2M x 36	(2) 2M x 36
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
48MB	(2) 1M x 36	(2) 1M x 36	(2) 4M x 36
56MB	(2) 1M x 36	(2) 2M x 36	(2) 4M x 36
64MB	(2) 2M x 36	(2) 2M x 36	(2) 4M x 36
64MB	(2) 8M x 36	None	None
64MB	(2) 4M x 36	(2) 4M x 36	None
72MB	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
80MB	(2) 2M x 36	(2) 4M x 36	(2) 4M x 36
88MB	(2) 1M x 36	(2) 2M x 36	(2) 8M x 36
96MB	(2) 2M x 36	(2) 2M x 36	(2) 8M x 36
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
104MB	(2) 1M x 36	(2) 4M x 36	(2) 8M x 36
136MB	(2) 1M x 36	(2) 8M x 36	(2) 8M x 36

Continued on next page...

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS GL (VER. 2), VENTURIS GL (VER. 2)

... continued from previous page

SIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
112MB	(2) 2M x 36	(2) 4M x 36	(2) 8M x 36
128MB	(2) 4M x 36	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
160MB	(2) 4M x 36	(2) 8M x 36	(2) 8M x 36
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium Pro CPU.

VIDEO MEMORY CONFIGURATION
Note: The size and configuration of the video memory is unidentified. To install memory upgrade, install module in C1.


CPU SPEED SELECTION			
CPU speed	SW1/2	SW1/3	SW1/4
150MHz	Off	On	On
166MHz	Off	On	On
180MHz	On	Off	On
200MHz	On	Off	On
210MHz	Off	Off	On
233MHz	Off	Off	On
240MHz	On	On	Off
266MHz	On	On	Off

CPU BUS SPEED SELECTION	
Type	SW1/1
60MHz	Off
66MHz	On


Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS GL (VER. 2), VENTURIS GL (VER. 2)

... continued from previous page

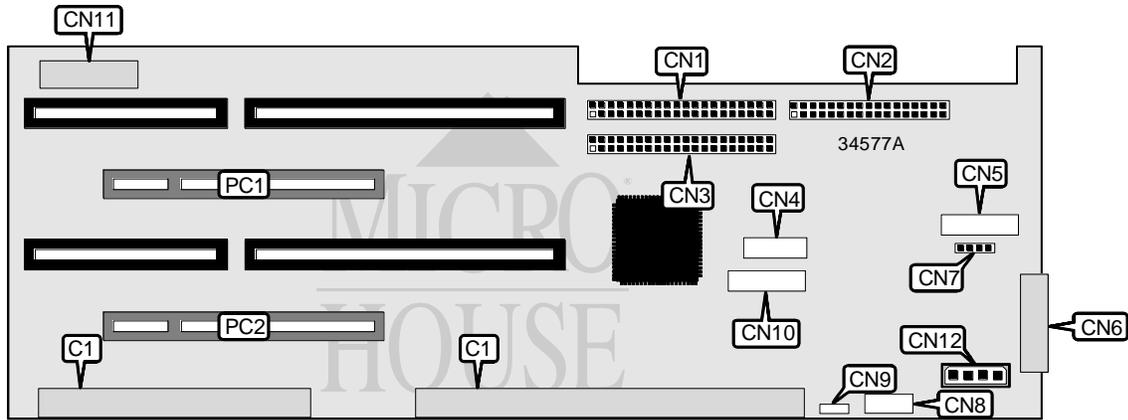

CELEBRIS GL LOW PROFILE BACKPLANE (FRONT VIEW)

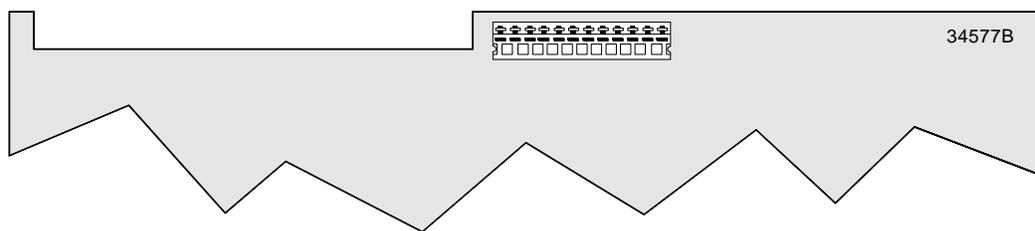


CELEBRIS GL LOW PROFILE BACKPLANE (BACK VIEW)

CONNECTIONS			
Purpose	Location	Purpose	Location
Main Logic Board connectors	C1	Fax/modem connector	CN7
IDE interface 1	CN1	Game/MIDI port	CN8
Floppy drive interface	CN2	SCSI interface LED	CN9
IDE interface 2	CN3	100Base T connector	CN10
10Base T/10Base-2 connector	CN4	Video in connector	CN11
Audio connector	CN5	Audio in - CD-ROM	CN12
Control panel	CN6	32-bit PCI slots	PC1 & PC2

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS GL (VER. 2), VENTURIS GL (VER. 2)

... continued from previous page

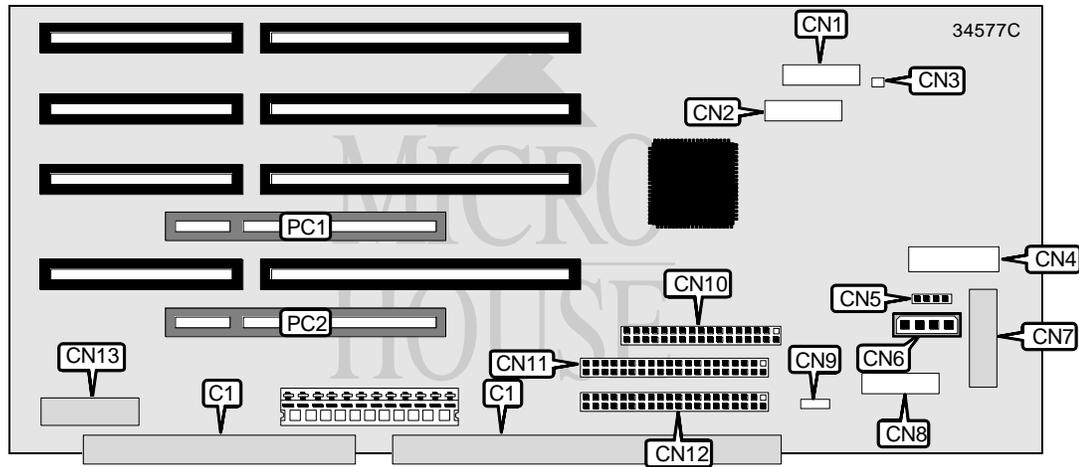

CELEBRIS SHORT TOWER BACKPLANE

CONNECTIONS			
Purpose	Location	Purpose	Location
Main Logic Board connectors	C1	Game/MIDI port	CN8
10Base-T/10Base-2 connector	CN1	SCSI interface LED	CN9
100Base T connector	CN2	Floppy drive interface	CN10
Chassis fan power	CN3	IDE interface 2	CN11
Audio connector	CN4	IDE interface 1	CN12
Fax/modem connector	CN5	Video in connector	CN13
Audio in - CD-ROM	CN6	32-bit PCI slots	PC1 & PC2
Control panel	CN7		