


FREE COMPUTER TECHNOLOGY, INC.

P 5 F 8 7

Processor	CX 6X86L/CX 686MX/IBM 6X86L/IBM 6X86MX/AM K5/AM K6/Pentium
Processor Speed	75/90/100/120/133/150/166/200/233/266/300MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	256MB (EDO supported)
Maximum Video Memory	None
Cache	512KB
BIOS	Award
Dimensions	305mm x 180mm
I/O Options	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse interface, serial ports (2), IR connector, USB connector, ATX power connector
NPU Options	None

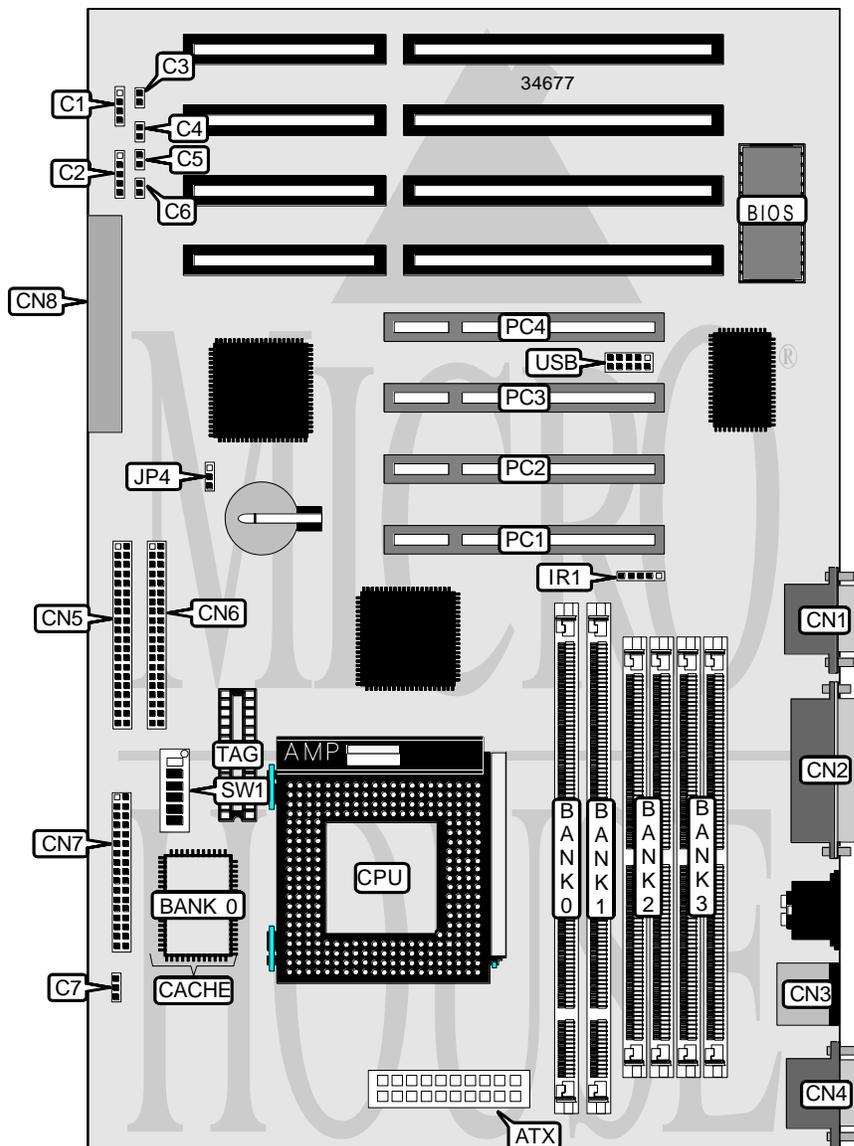

Continued on next page . . .

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	PS/2 mouse port	CN3
Speaker	C1	Serial port 1	CN4
Power LED & keylock	C2	IDE interface 1	CN5
IDE interface LED	C3	IDE interface 2	CN6
Turbo LED	C4	Floppy drive interface	CN7
Reset switch	C5	SMM connector	CN8
Soft off power supply	C6	IR connector	IR1
CPU fan power	C7	32-bit PCI slots	PC1 – PC4
Serial port 2	CN1	USB connector	USB
Parallel port	CN2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
CMOS memory normal operation	JP4	Pins 1 & 2 closed
CMOS memory clear	JP4	Pins 2 & 3 closed

SIMM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36
128MB	(2) 16M x 36	None
136MB	(2) 16M x 36	(2) 1M x 36
144MB	(2) 16M x 36	(2) 2M x 36
160MB	(2) 16M x 36	(2) 4M x 36
192MB	(2) 16M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36

Note: Board accepts EDO memory.

Continued on next page. . .

... continued from previous page

DIMM CONFIGURATION		
Size	Bank 2	Bank 3
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64

CACHE CONFIGURATION		
Size	Bank 0	TAG
512KB	(1) 64K x 64	Unidentified

CPU SPEED SELECTION (CX 6X86L)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
133MHz	55MHz	2x	On	Off	Off	On	On	Off
150MHz	60MHz	2x	On	Off	Off	Off	On	On
166MHz	66MHz	2x	On	Off	Off	On	Off	On

CPU SPEED SELECTION (CX 6X86MX)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
166MHz	60MHz	2.5x	On	On	Off	Off	On	On
166MHz	66MHz	2x	On	Off	Off	On	Off	On
200MHz	66MHz	2.5x	On	On	Off	On	Off	On
233MHz	66MHz	3x	Off	Off	Off	On	Off	On
266MHz	66MHz	4x	Off	On	Off	On	Off	On

Continued on next page. . .

... continued from previous page

CPU SPEED SELECTION (IBM 6X86L)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
133MHz	55MHz	2x	On	Off	Off	On	On	Off
150MHz	60MHz	2x	On	Off	Off	Off	On	On
166MHz	66MHz	2x	On	Off	Off	On	Off	On

CPU SPEED SELECTION (IBM 6X86MX)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
166MHz	60MHz	2.5x	On	On	Off	Off	On	On
166MHz	66MHz	2x	On	Off	Off	On	Off	On
200MHz	66MHz	2.5x	On	On	Off	On	Off	On
233MHz	66MHz	3x	Off	Off	Off	On	Off	On
266MHz	66MHz	4x	Off	On	Off	On	Off	On

CPU SPEED SELECTION (AM K5)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
75MHz	50MHz	1.5x	Off	Off	Off	On	On	On
90MHz	60MHz	1.5x	Off	Off	Off	Off	On	On
100MHz	66MHz	1.5x	Off	Off	Off	On	Off	On
120MHz	60MHz	1.5x	Off	Off	Off	Off	On	On
133MHz	66MHz	1.5x	Off	Off	Off	On	Off	On
150MHz	60MHz	1.75x	On	On	Off	Off	On	On
166MHz	66MHz	1.75x	On	On	Off	On	Off	On

CPU SPEED SELECTION (AM K6)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
166MHz	66MHz	2.5x	On	On	Off	On	Off	On
200MHz	66MHz	3x	Off	On	Off	On	Off	On
233MHz	66MHz	3.5x	Off	Off	Off	On	Off	On
266MHz	66MHz	4x	On	Off	On	On	Off	On
300MHz	66MHz	4.5x	On	On	On	On	Off	On

Continued on next page. . .

... continued from previous page

CPU SPEED SELECTION (INTEL)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
75MHz	50MHz	1.5x	Off	Off	Off	On	On	On
90MHz	60MHz	1.5x	Off	Off	Off	Off	On	On
100MHz	66MHz	1.5x	Off	Off	Off	On	Off	On
120MHz	60MHz	2x	On	Off	Off	Off	On	On
133MHz	66MHz	2x	On	Off	Off	On	Off	On
150MHz	60MHz	2.5x	On	On	Off	Off	On	On
166MHz	66MHz	2.5x	On	On	Off	On	Off	On
200MHz	66MHz	3x	Off	Off	Off	On	Off	On

CPU SPEED SELECTION (INTEL MMX)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
166MHz	66MHz	2.5x	On	On	Off	On	Off	On
200MHz	66MHz	3x	Off	Off	Off	On	Off	On
233MHz	66MHz	3.5x	Off	Off	Off	On	Off	On