


ACER, INC.  
 AX6L (VER. B)

<b>Processor</b>	Pentium II
<b>Processor Speed</b>	233/266/300MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	1GB (EDO & SDRAM supported)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256/512KB (located on Pentium II CPU)
<b>BIOS</b>	Award
<b>Dimensions</b>	305mm x 244mm
<b>I/O Options</b>	32-bit PCI slots (4), IR connector, floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), USB connectors (2), ATX power connector, AGP slot
<b>NPU Options</b>	None

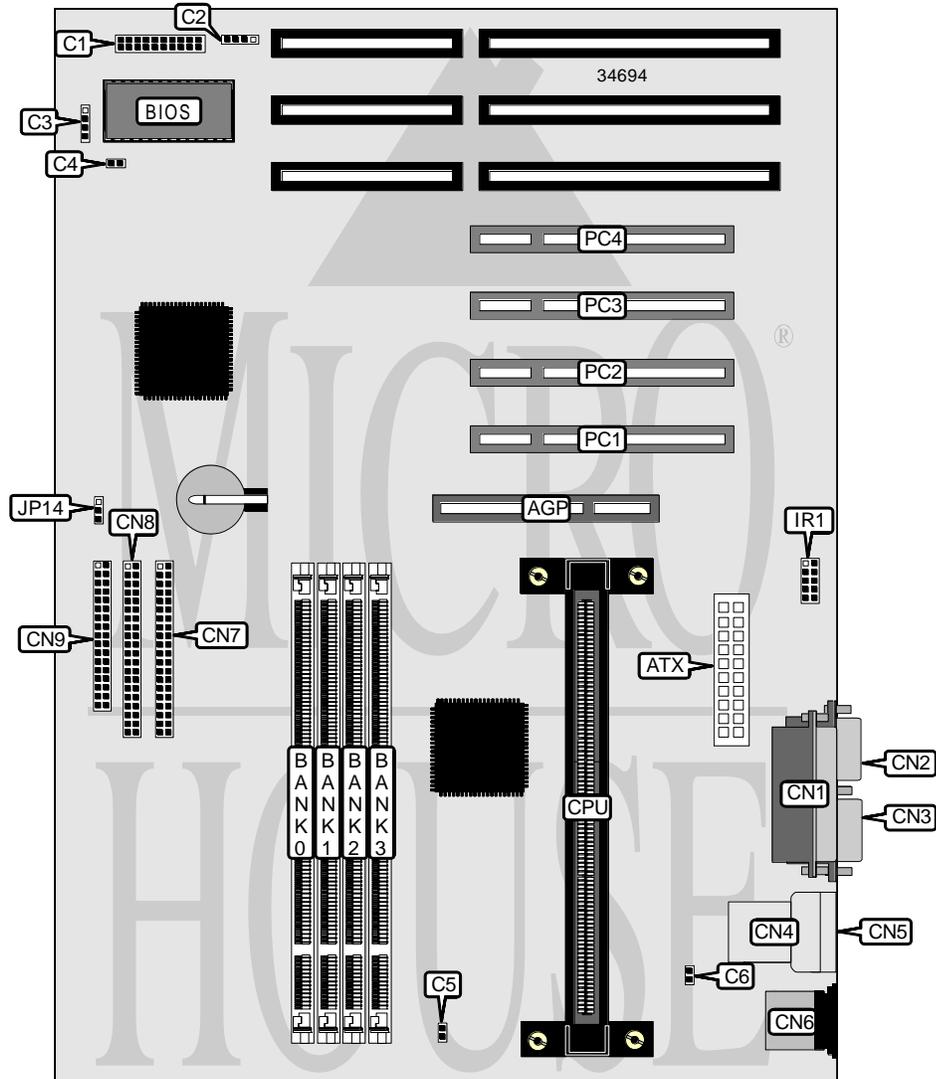

Continued on next page . . .

ACER, INC.  
AX6L (VER. B)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Serial port 1	CN3
AGP slot	AGP	USB connector 1	CN4
Front panel connector	C1	USB connector 2	CN5
IDE interface LED	C2	PS/2 mouse port	CN6
Wake on LAN connector	C3	IDE interface 2	CN7
Soft off power supply	C4	IDE interface 1	CN8
CPU fan power	C5	Floppy drive interface	CN9
Chassis fan power	C6	IR connector	IR1
Parallel port	CN1	32-bit PCI slots	PC1 – PC4
Serial port 2	CN2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
CMOS memory normal operation	JP14	Pins 1 & 2 closed
CMOS memory clear	JP14	Pins 2 & 3 closed

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 1M x 64			
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64	None
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64	None
56MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 2M x 64			
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 8M x 64	None	None	None
80MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
80MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None	None
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64	None

Continued on next page...

ACER, INC.  
AX6L (VER. B)

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
96MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
96MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
112MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64	None
112MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
128MB	(1) 16M x 64	None	None	None
128MB	(1) 4M x 64			
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
160MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
224MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 8M x 64			
288MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	None
320MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
448MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64
512MB	(1) 16M x 64			
1024MB	(1) 32M x 64			

Note: Board accepts EDO & SDRAM memory.

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.