


DELL COMPUTER CORPORATION OPTIPLEX GXMT

Processor	Pentium
Processor Speed	90/100/120/133/150/166/200MHz
Chip Set	Intel
Video Chip Set	S3
Maximum Onboard Memory	128MB (EDO supported)
Maximum Video Memory	2MB
Cache	256/512KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Ethernet 10BaseT connector, floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port, riser slot, cache slot, line in, line out, microphone in, audio in – CD-ROM
NPU Options	None

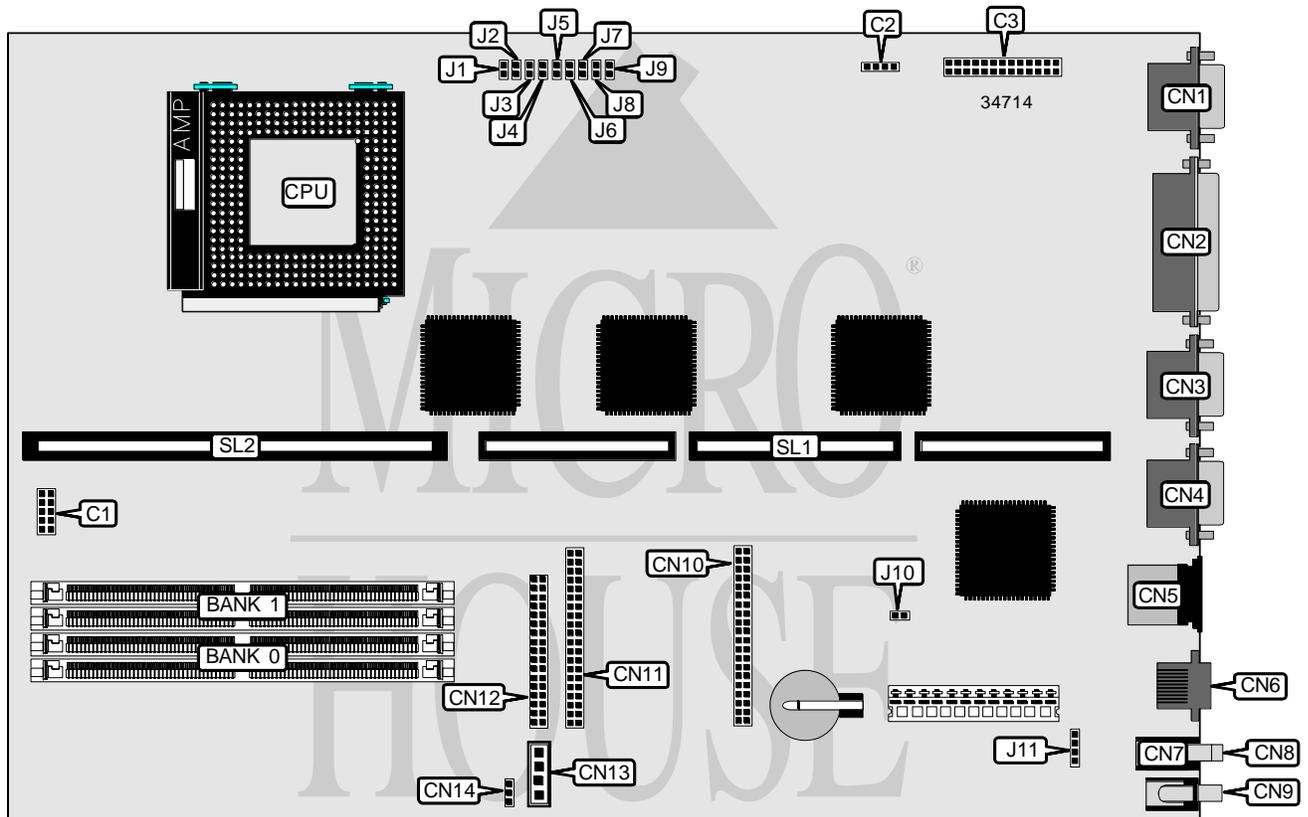

Continued on next page...

DELL COMPUTER CORPORATION
OPTIPLEX GXMT

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Front panel connector	C1	Microphone in	CN8
IDE interface LED 1	C2	Line out	CN9
VGA feature connector	C3	IDE interface 1	CN10
VGA port	CN1	IDE interface 2	CN11
Parallel port	CN2	Floppy drive interface	CN12
Serial port 2	CN3	Audio in – CD-ROM	CN13
Serial port 1	CN4	Chassis fan power	CN14
PS/2 mouse port	CN5	IDE interface LED 2	J11
Ethernet 10BaseT connector	CN6	Riser slot	SL1
Line in	CN7	Cache slot	SL2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Password enabled	J2	Closed
Password disabled	J2	Open
í Factory configured - do not alter	J9	Open
í NIC programming normal operation	J10	Open
NIC programming clear	J10	Closed

SIMM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION	
Size	SL1
256KB	256KB module installed
512KB	512KB module installed

Continued on next page...

DELL COMPUTER CORPORATION
OPTIPLEX GXMT

... continued from previous page

VIDEO MEMORY CONFIGURATION

Note: Board is factory installed with 2MB video memory. The location is unidentified.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	J1	J3	J4
90MHz	60MHz	1.5x	Open	Open	Open
100MHz	66MHz	1.5x	Open	Open	Open
120MHz	60MHz	2x	Open	Open	Open
133MHz	66MHz	2x	Open	Open	Open
150MHz	60MHz	2.5x	Open	Open	Closed
166MHz	66MHz	2.5x	Open	Closed	Open
200MHz	66MHz	3x	Closed	Open	Open

CPU SPEED SELECTION (CON'T)

CPU speed	Clock speed	Multiplier	J5	J6	J7	J8
90MHz	60MHz	1.5x	Open	Open	Open	Closed
100MHz	66MHz	1.5x	Open	Open	Closed	Open
120MHz	60MHz	2x	Open	Closed	Open	Open
133MHz	66MHz	2x	Closed	Open	Open	Open
150MHz	60MHz	2.5x	Open	Open	Open	Open
166MHz	66MHz	2.5x	Open	Open	Open	Open
200MHz	66MHz	3x	Open	Open	Open	Open