


SOLTEK COMPUTER, INC.

SL - 6 1 C

Device Type	Mainboard
Processor	Pentium II/Celeron
Processor Speed	233/266/300/333MHz
Chip Set	Intel 440EX
Maximum Onboard Memory	256MB (EDO & SDRAM supported)
Cache	256/512KB (located on the Pentium II CPU)
BIOS	Award
I/O Options	32-bit PCI slots (3), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), AGP slot, USB connector, IR connector, green PC connector
Dimensions	220mm x 220mm

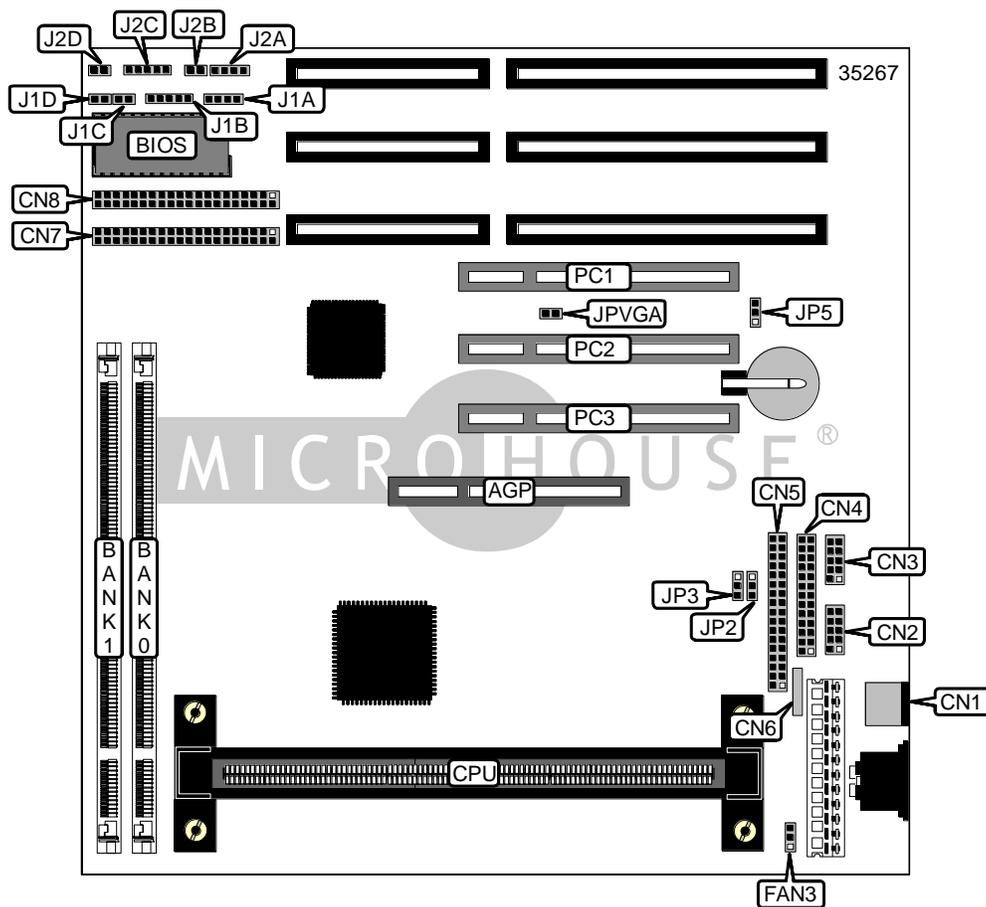

Continued on next page. . .

SOLTEK COMPUTER, INC.
SL - 61C

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface LED	J1A
PS/2 mouse port	CN1	IR connector	J1B
Serial port 2	CN2	Power switch	J1C
Serial port 1	CN3	Green PC connector	J1D
Parallel port	CN4	Speaker	J2A
Floppy drive interface	CN5	Reset switch	J2B
USB connector	CN6	Power LED & keylock	J2C
IDE interface 1	CN7	Turbo LED	J2D
IDE interface 2	CN8	32-bit PCI slots	PC1 - PC3
Chassis fan power	FAN3		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP5	Pins 1 & 2 closed
CMOS memory clear	JP5	Pins 2 & 3 closed
í Normal VGA card enabled	JPVGA	Closed
Special VGA card enabled	JPVGA	Open

USB PORT SELECTION		
Function	JP2	JP3
í Redirect all USB ports to USB connector	Pins 2 & 3 closed	Pins 2 & 3 closed
Redirect USB1 to AGP port	Pins 1 & 2 closed	Pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(1) 1MB x 64	None
16MB	(1) 1MB x 64	(1) 1MB x 64
16MB	(1) 2MB x 64	None
24MB	(1) 2MB x 64	(1) 1MB x 64
32MB	(1) 2MB x 64	(1) 2MB x 64
32MB	(1) 4MB x 64	None
40MB	(1) 4MB x 64	(1) 1MB x 64
48MB	(1) 4MB x 64	(1) 2MB x 64
64MB	(1) 4MB x 64	(1) 4MB x 64
64MB	(1) 8MB x 64	None
72MB	(1) 8MB x 64	(1) 1MB x 64
80MB	(1) 8MB x 64	(1) 2MB x 64
96MB	(1) 8MB x 64	(1) 4MB x 64
128MB	(1) 8MB x 64	(1) 8MB x 64
136MB	(1) 16MB x 64	None
144MB	(1) 16MB x 64	(1) 1MB x 64
160MB	(1) 16MB x 64	(1) 2MB x 64
192MB	(1) 16MB x 64	(1) 4MB x 64
224MB	(1) 16MB x 64	(1) 8MB x 64
256MB	(1) 16MB x 64	(1) 16MB x 64

Note: Board accepts both EDO and SDRAM.