COMPAQ COMPUTER CORPORATION
P R O L I A N T 1 2 0 0

Device Type	Mainboard
Processor	Pentium II
Processor Speed	233/266/300/333MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	512MB (EDO supported)
Maximum Video Memory	Unidentified
Cache	256/512KB (located on Pentium II CPU)
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options (I/O board)	32-bit PCI slots (6), parallel port, PS/2 mouse port, serial ports (2)
I/O Options (processor board)	Ethernet 10Base5 connector, Ethernet 10BaseT connector, SCSI interface, VGA port, memory slot
NPU Options	None

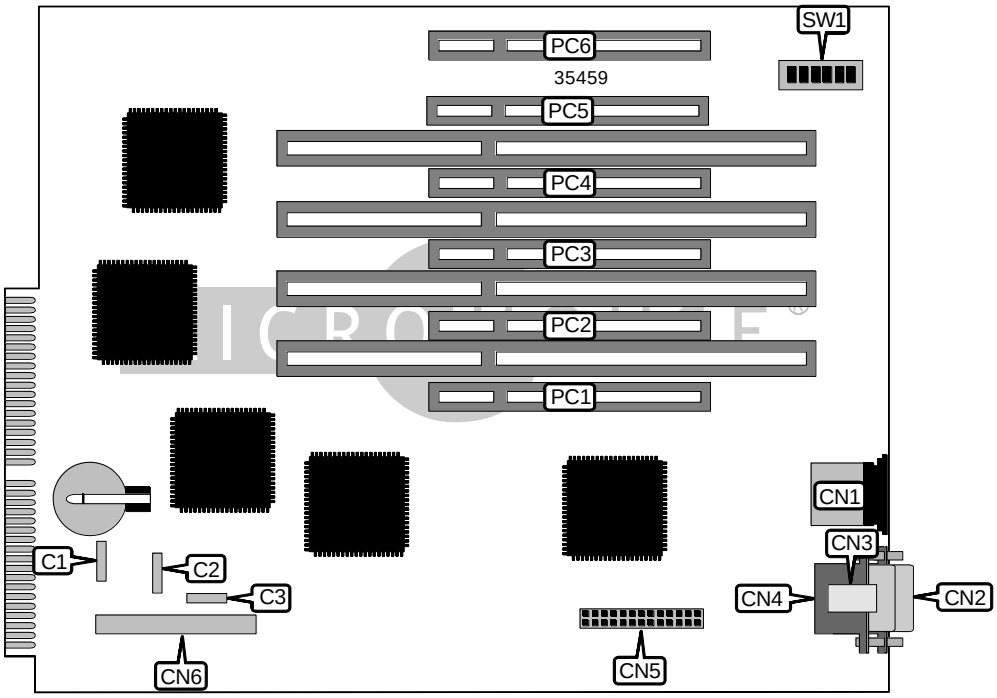

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
P R O L I A N T 1 2 0 0

. . . continued from previous page

CONNECTIONS			
Purpose	**Location**	**Purpose**	**Location**
Speaker	C1	Parallel port	CN3
Battery jumper	C2	Serial port 2	CN4
External battery	C3	Parallel port connector	CN5
PS/2 mouse port	CN1	I2O connector	CN6
Serial port 1	CN2	32-bit PCI slots	PC1 – PC6

USER CONFIGURABLE SETTINGS		
Function	**Label**	**Position**
í On board video enabled	SW1/1	Off
On board video disabled	SW1/1	On
í Setup access enabled	SW1/2	Off
Setup access disabled	SW1/2	On
í System setup in a tower	SW1/3	Off
System setup in a rack mount	SW1/3	On
í Floppy drive boot enabled	SW1/4	Off
Floppy drive boot disabled	SW1/4	On
í Password normal operation	SW1/5	Off
Password clear	SW1/5	On
í NVRAM is validated, configuration not lost	SW1/6	Off
NVRAM is invalidated, configuration is lost	SW1/6	On

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
P R O L I A N T 1 2 0 0

. . . continued from previous page

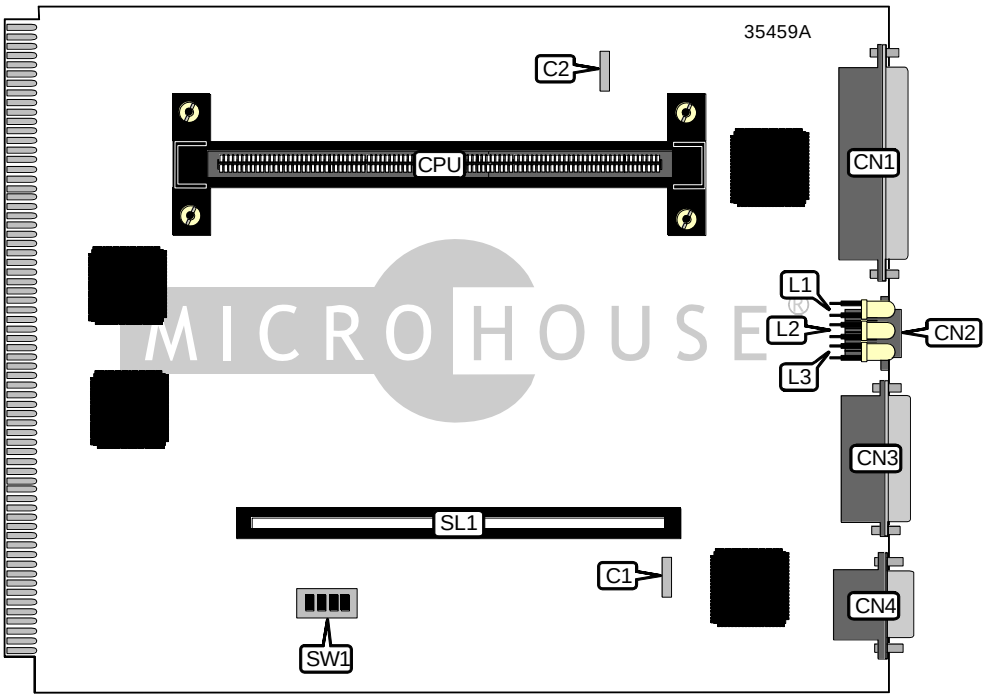

PROCESSOR BOARD

CONNECTIONS			
Purpose	**Location**	**Purpose**	**Location**
CPU fan power	C1	VGA port	CN4
LED	C2	Speed LED	L1
SCSI interface	CN1	Link LED	L2
Ethernet 10BaseT connector	CN2	Active LED	L3
Ethernet 10Base5 connector	CN3	Memory card slot	SL1

MEMORY CONFIGURATION
Note: The maximum amount of memory is unidentified.

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION
Note: The size and location of the video memory is unidentified.

Continued on next page. . .

. . . continued from previous page

CPU SPEED SELECTION						
CPU speed	**Clock speed**	**Multiplier**	**SW1/1**	**SW1/2**	**SW1/3**	**SW1/4**
233MHz	66MHz	3.5x	Off	Off	Off	On
266MHz	66MHz	4x	Off	On	On	Off
300MHz	66MHz	4.5x	Off	Off	On	Off
333MHz	66MHz	5x	Off	On	Off	Off