


ASUS COMPUTER INTERNATIONAL P2B (REV. 1.00)

| | |
|-------------------------------|---|
| Device Type | Mainboard |
| Processor | Pentium II |
| Processor Speed | 233/266/300/333/350/400MHz |
| Chip Set | Intel |
| Video Chip Set | None |
| Maximum Onboard Memory | 384MB (EDO & SDRAM supported) |
| Maximum Video Memory | None |
| Cache | 512KB (located on Pentium II CPU) |
| BIOS | Unidentified |
| Dimensions | 305mm x 244mm |
| I/O Options | 32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot |
| NPU Options | None |

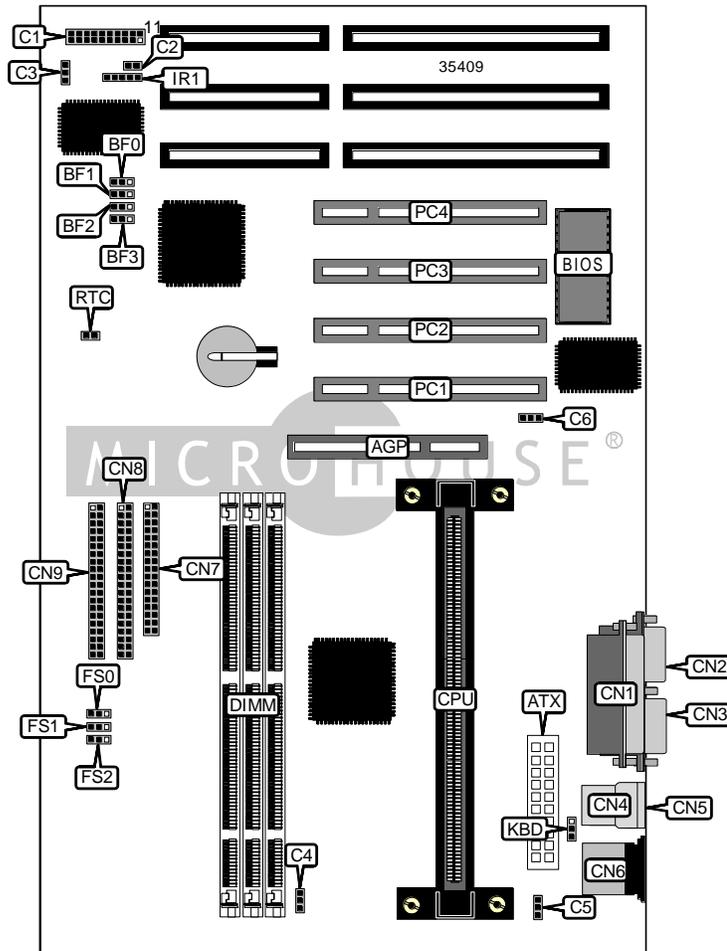

Continued on next page. . .

ASUS COMPUTER INTERNATIONAL
P2B (REV. 1.00)

... continued from previous page

| CONNECTIONS | | | |
|-----------------------|-----------------|------------------------|-----------|
| Purpose | Location | Purpose | Location |
| AGP slot | AGP | Wake on LAN connector | C6 |
| ATX power connector | ATX | Parallel port | CN1 |
| Power LED & keylock | C1/pins 1 - 5 | Serial port 2 | CN2 |
| Speaker | C1/pins 7 - 10 | Serial port 1 | CN3 |
| Message LED | C1/pins 12 & 13 | USB connector 1 | CN4 |
| Green PC connector | C1/pins 14 & 15 | USB connector 2 | CN5 |
| Soft off power supply | C1/pins 16 & 17 | PS/2 mouse port | CN6 |
| Reset switch | C1/pins 19 & 20 | Floppy drive interface | CN7 |
| IDE interface LED | C2 | IDE interface 2 | CN8 |
| Chassis fan power | C3 | IDE interface 1 | CN9 |
| CPU fan power | C4 | IR connector | IR1 |
| Power supply fan | C5 | 32-bit PCI slots | PC1 – PC4 |

| USER CONFIGURABLE SETTINGS | | |
|--------------------------------|-------|-------------------|
| Function | Label | Position |
| í Keyboard power disabled | KBD | Pins 1 & 2 closed |
| Keyboard power enabled | KBD | Pins 2 & 3 closed |
| í CMOS memory normal operation | RTC | Open |
| CMOS memory clear | RTC | Closed |

| DIMM CONFIGURATION | | | |
|--------------------|-------------|-------------|-------------|
| Size | Bank 0 | Bank 1 | Bank 2 |
| 8MB | (1) 1M x 64 | None | None |
| 16MB | (1) 2M x 64 | None | None |
| 16MB | (1) 1M x 64 | (1) 1M x 64 | None |
| 24MB | (1) 2M x 64 | (1) 1M x 64 | None |
| 24MB | (1) 1M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 32MB | (1) 4M x 64 | None | None |
| 32MB | (1) 2M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 32MB | (1) 2M x 64 | (1) 2M x 64 | None |
| 40MB | (1) 4M x 64 | (1) 1M x 64 | None |
| 40MB | (1) 2M x 64 | (1) 2M x 64 | (1) 1M x 64 |
| 48MB | (1) 4M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 48MB | (1) 4M x 64 | (1) 2M x 64 | None |
| 48MB | (1) 2M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 56MB | (1) 4M x 64 | (1) 2M x 64 | (1) 1M x 64 |
| 64MB | (1) 8M x 64 | None | None |

Continued on next page...

ASUS COMPUTER INTERNATIONAL
P2B (REV. 1.00)

... continued from previous page

| DIMM CONFIGURATION (CON'T) | | | |
|----------------------------|--------------|--------------|--------------|
| Size | Bank 0 | Bank 1 | Bank 2 |
| 64MB | (1) 4M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 64MB | (1) 4M x 64 | (1) 4M x 64 | None |
| 72MB | (1) 8M x 64 | (1) 1M x 64 | None |
| 72MB | (1) 4M x 64 | (1) 4M x 64 | (1) 1M x 64 |
| 80MB | (1) 8M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 80MB | (1) 8M x 64 | (1) 2M x 64 | None |
| 80MB | (1) 4M x 64 | (1) 4M x 64 | (1) 2M x 64 |
| 88MB | (1) 8M x 64 | (1) 2M x 64 | (1) 1M x 64 |
| 96MB | (1) 8M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 96MB | (1) 8M x 64 | (1) 4M x 64 | None |
| 96MB | (1) 4M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 104MB | (1) 8M x 64 | (1) 4M x 64 | (1) 1M x 64 |
| 112MB | (1) 8M x 64 | (1) 4M x 64 | (1) 2M x 64 |
| 128MB | (1) 16M x 64 | None | None |
| 128MB | (1) 8M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 128MB | (1) 8M x 64 | (1) 8M x 64 | None |
| 136MB | (1) 16M x 64 | (1) 1M x 64 | None |
| 136MB | (1) 8M x 64 | (1) 8M x 64 | (1) 1M x 64 |
| 144MB | (1) 16M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 144MB | (1) 16M x 64 | (1) 2M x 64 | None |
| 144MB | (1) 8M x 64 | (1) 8M x 64 | (1) 2M x 64 |
| 152MB | (1) 16M x 64 | (1) 2M x 64 | (1) 1M x 64 |
| 160MB | (1) 16M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 160MB | (1) 16M x 64 | (1) 4M x 64 | None |
| 160MB | (1) 8M x 64 | (1) 8M x 64 | (1) 4M x 64 |
| 168MB | (1) 16M x 64 | (1) 4M x 64 | (1) 1M x 64 |
| 176MB | (1) 16M x 64 | (1) 4M x 64 | (1) 2M x 64 |
| 192MB | (1) 16M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 192MB | (1) 16M x 64 | (1) 8M x 64 | None |
| 192MB | (1) 8M x 64 | (1) 8M x 64 | (1) 8M x 64 |
| 200MB | (1) 16M x 64 | (1) 8M x 64 | (1) 1M x 64 |
| 208MB | (1) 16M x 64 | (1) 8M x 64 | (1) 2M x 64 |
| 224MB | (1) 16M x 64 | (1) 8M x 64 | (1) 4M x 64 |
| 256MB | (1) 16M x 64 | (1) 8M x 64 | (1) 8M x 64 |
| 384MB | (1) 16M x 64 | (1) 16M x 64 | (1) 16M x 64 |

Note: Board accepts EDO & SDRAM memory.

| CACHE CONFIGURATION |
|---|
| Note: 512KB cache is located on the Pentium II CPU. |

Continued on next page...

ASUS COMPUTER INTERNATIONAL
P2B (REV. 1.00)

... continued from previous page

| CPU SPEED SELECTION | | | | | |
|---------------------|-------------|------------|-------|-------|-------|
| CPU speed | Clock speed | Multiplier | FS0 | FS1 | FS2 |
| 233MHz | 66MHz | 3.5x | 1 & 2 | 1 & 2 | 2 & 3 |
| 266MHz | 66MHz | 4x | 1 & 2 | 1 & 2 | 2 & 3 |
| 300MHz | 66MHz | 4.5x | 1 & 2 | 1 & 2 | 2 & 3 |
| 300MHz | 100MHz | 3x | 1 & 2 | 1 & 2 | 1 & 2 |
| 333MHz | 66MHz | 5x | 1 & 2 | 1 & 2 | 2 & 3 |
| 350MHz | 100MHz | 3.5x | 1 & 2 | 1 & 2 | 1 & 2 |
| 400MHz | 100MHz | 4x | 1 & 2 | 1 & 2 | 1 & 2 |

Note: Pins designated should be in the closed position.

| CPU SPEED SELECTION (CON'T) | | | | | | |
|-----------------------------|-------------|------------|-------|-------|-------|-------|
| CPU speed | Clock speed | Multiplier | BF0 | BF1 | BF2 | BF3 |
| 233MHz | 66MHz | 3.5x | 1 & 2 | 1 & 2 | 2 & 3 | 2 & 3 |
| 266MHz | 66MHz | 4x | 2 & 3 | 2 & 3 | 1 & 2 | 2 & 3 |
| 300MHz | 66MHz | 4.5x | 1 & 2 | 2 & 3 | 1 & 2 | 2 & 3 |
| 300MHz | 100MHz | 3x | 2 & 3 | 1 & 2 | 2 & 3 | 2 & 3 |
| 333MHz | 66MHz | 5x | 2 & 3 | 1 & 2 | 1 & 2 | 2 & 3 |
| 350MHz | 100MHz | 3.5x | 1 & 2 | 1 & 2 | 2 & 3 | 2 & 3 |
| 400MHz | 100MHz | 4x | 2 & 3 | 2 & 3 | 1 & 2 | 2 & 3 |

Note: Pins designated should be in the closed position.