


CONCORD OFFICE AUTOMATION INDUSTRIAL (HK), LTD. COA - G10LV2

Device Type	Mainboard
Processor	CX GXI
Processor Speed	120/133/150/166/180/200/233MHz
Chip Set	Cyrix
Video Chip Set	None
Maximum Onboard Memory	128MB (EDO & SDRAM supported)
Maximum Video Memory	None231
Cache	None
BIOS	Award
Dimensions	220mm x 170mm
I/O Options	64-bit PCI slots (2), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector
NPU Options	None

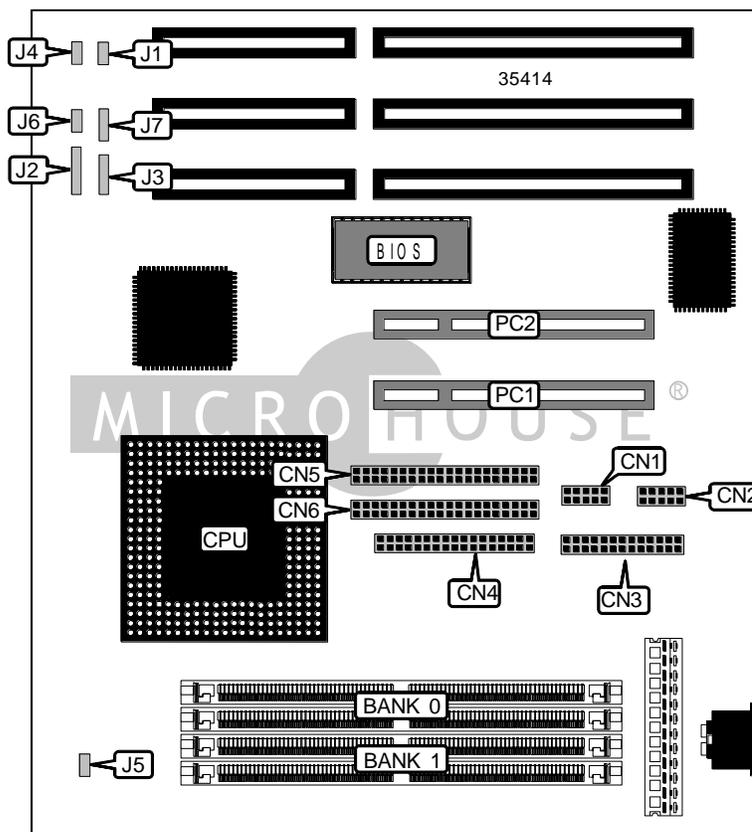

Continued on next page. . .

AVT INDUSTRIAL, LTD.
586 GX LITE

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 2	CN1	Power LED & keylock	J3
Serial port 1	CN2	IDE interface LED	J4
Parallel port	CN3	Front panel fan	J5
Floppy drive interface	CN4	CPU fan power	J6
IDE interface 2	CN5	Speaker	J7
IDE interface 1	CN6	PS/2 mouse port	P4
Reset switch	J1	64-bit PCI slots	PC1 – PC2
IR connector	J2		
Note: The location of P4 is unidentified.			

SIMM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36
Note: Board accepts EDO memory.		