


# SOYO COMPUTER CO., LTD.

## SY-6IZA

<b>Device Type</b>	Mainboard
<b>Processor</b>	Celeron
<b>Processor Speed</b>	300/333/366/400/433MHz
<b>Chip Set</b>	Intel 440ZX
<b>Maximum Onboard Memory</b>	256MB (SDRAM supported)
<b>Audio Chip Set</b>	Unidentified
<b>Cache</b>	128KB (located on the Celeron CPU)
<b>BIOS</b>	Award
<b>Dimensions</b>	305mm x 170mm
<b>I/O Options</b>	32-bit PCI slots (4), floppy drive interface, game/MIDI port, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, line in, line out, microphone in, audio in - CD-ROMs (2), SB-link connector, wake on LAN connector

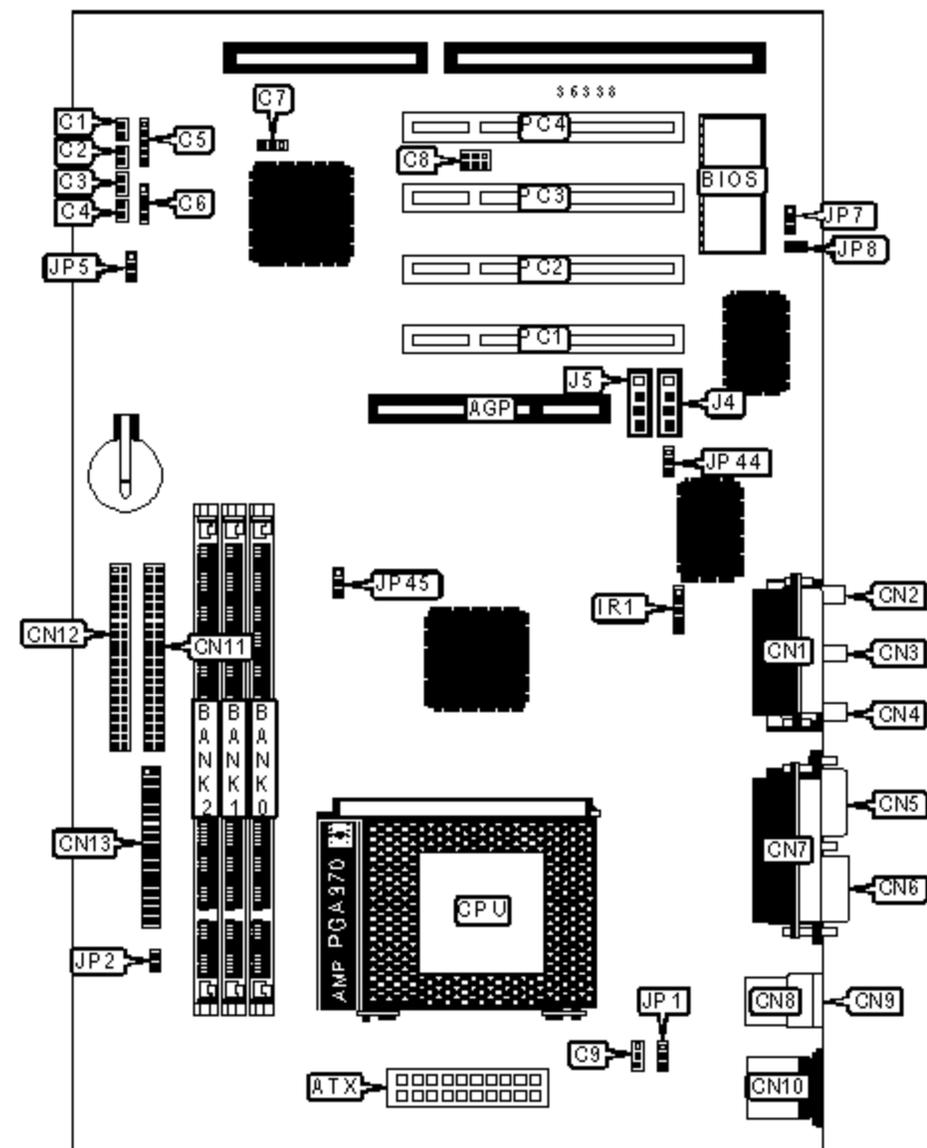

### CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Serial port 1	CN5

ATX power connector	ATX	Serial port 2	CN6
Reset switch	C1	Parallel port	CN7
Soft off power supply	C2	USB connector 1	CN8
Turbo LED	C3	USB connector 2	CN9
IDE interface LED	C4	PS/2 mouse port	CN10
Power LED & keylock	C5	IDE interface 2	CN11
Speaker	C6	IDE interface 1	CN12
Chassis fan power	C7	Floppy drive interface	CN13
CPU fan power	C8	IR connector	IR1
SB-link connector	C9	Audio in - CD-ROM	J4
Game/MIDI port	CN1	Audio in - CD-ROM	J5
Microphone in	CN2	Green PC connector	JP2
Line in	CN3	Wake on LAN connector	JP44
Line out	CN4	32-bit PCI slots	PC1 - PC4

### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Keyboard power on disabled	JP1	Pins 2 & 3 closed
	Keyboard power on enabled	JP1	Pins 1 & 2 closed
»	CMOS memory normal operation	JP5	Pins 1 & 2 closed
	CMOS memory clear	JP5	Pins 2 & 3 closed
	On board sound enabled	JP7	Pins 2 & 3 closed
	On board sound disabled	JP7	Pins 1 & 2 closed
	Soft off power supply enabled	JP8	Closed
	Soft off power supply set to BIOS	JP8	Open
	AGP clock select 66MHz	JP45	Pins 2 & 3 closed
	AGP clock select 100MHz	JP45	Pins 1 & 2 closed

**DIMM CONFIGURATION**

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64

**DIMM CONFIGURATION (CON'T)**

Size	Bank 0	Bank 1	Bank 2
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64

88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64

Note: Board accepts SDRAM memory.

## CACHE CONFIGURATION

Note: 128KB cache is located on the Celeron CPU.