


LUCKY STAR TECHNOLOGY CO., LTD.

6ABX3

Device Type	Mainboard
Processor	Pentium II/Celeron
Processor Speed	Unidentified
Chip Set	Intel 440BX
Video Chip Set	Strong 3D
Maximum Onboard Memory	768MB (EDO & SDRAM supported)
Maximum Video Memory	8MB
Audio Chip Set	Unidentified
Cache	0/128/256/512KB (located on the CPU)
BIOS	Award
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (4), floppy drive interface, game/MIDI port, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, line in, line out, microphone in, audio in - CD-ROM, SB-link connector, wake on LAN connector

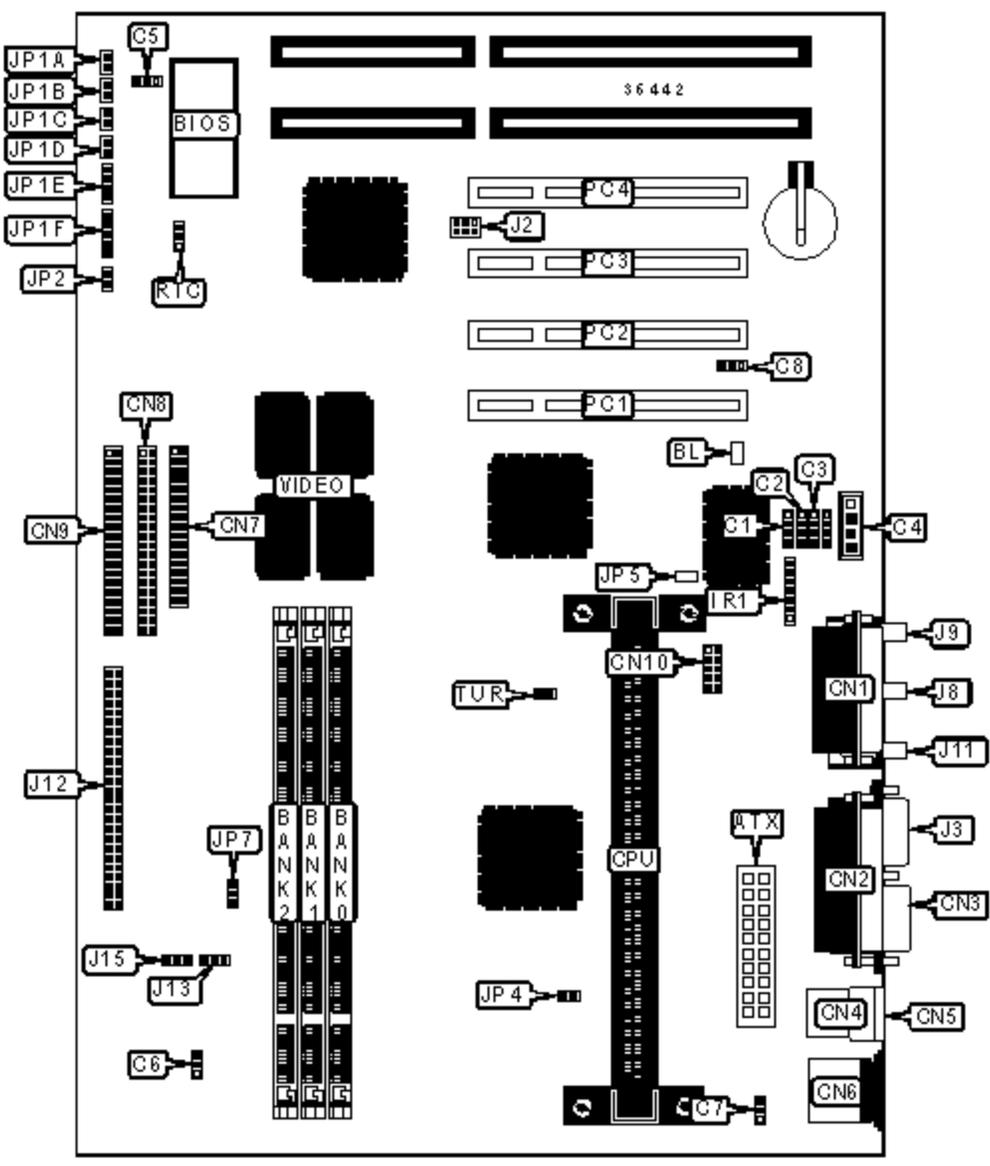

CONNECTIONS

Purpose	Location	Purpose	Location
ATX power connector	ATX	IR connector	IR1
		USB connector	J3
		USB connector	J8
		Parallel port	CN3
		Serial port	CN1
		Serial port	CN2
		Game/MIDI port	J9
		PS/2 mouse port	J11
		Line in/out	J10
		Microphone in	J1
		Audio in - CD-ROM	J11
		SB-link connector	CN5
		Wake on LAN connector	CN5

ATX power connector	ATX	IR connector	IR1
Tuner in	C1	SB-link connector	J2
Auxiliary in	C2	VGA port	J3
Line out	C3	Line out	J8
Audio in - CD-ROM	C4	Microphone in	J9
Chassis fan power	C5	Line out	J11
Chassis fan power	C6	Video/modem connector	J12
Chassis fan power	C7	C-video connector	J13
Wake on LAN connector	C8	SDPIF connector	J15
Game/MIDI port	CN1	Green PC connector	JP1A
Parallel port	CN2	Turbo LED	JP1B
Serial port 1	CN3	IDE interface LED	JP1C
USB connector 1	CN4	Reset switch	JP1D
USB connector 2	CN5	Speaker	JP1E
PS/2 mouse port	CN6	Power LED & keylock	JP1F
Floppy drive interface	CN7	Soft off power supply	JP2
IDE interface 2	CN8	S-video connector	JP7
IDE interface 1	CN9	32-bit PCI slots	PC1 - PC4
Serial port 2	CN10		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	BL	Unidentified
»	Factory configured - do not alter	JP4	Unidentified
»	Factory configured - do not alter	JP5	Unidentified
»	CMOS memory normal operation	RTC	Pins 1 & 2 closed
	CMOS memory clear	RTC	Pins 2 & 3 closed
»	Factory configured - do not alter	TUR	Unidentified

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None

80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64

256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board accepts EDO & SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU. 128KB cache is located on the Celeron 300A & 333 CPU.

VIDEO MEMORY CONFIGURATION

Note: Video memory is factory installed and is not configurable.