


COMPAQ COMPUTER CORPORATION

DESKPRO 4000 (PENTIUM II), DESKPRO 6000 (PENTIUM II)

Device Type	Mainboard
Processor	Pentium II
Processor Speed	233/266/300MHz
Chip Set	Intel 440LX
Maximum Onboard Memory	384MB (SDRAM supported)
Cache	256/512KB (located on the Pentium II CPU)
BIOS	Unidentified
Dimensions	Unidentified
I/O Options	32-bit PCI slots, Ethernet 10BaseT connector, floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), riser slot, USB connectors (2), ATX power connector, AGP slot, line in, line out, microphone in, headphone out

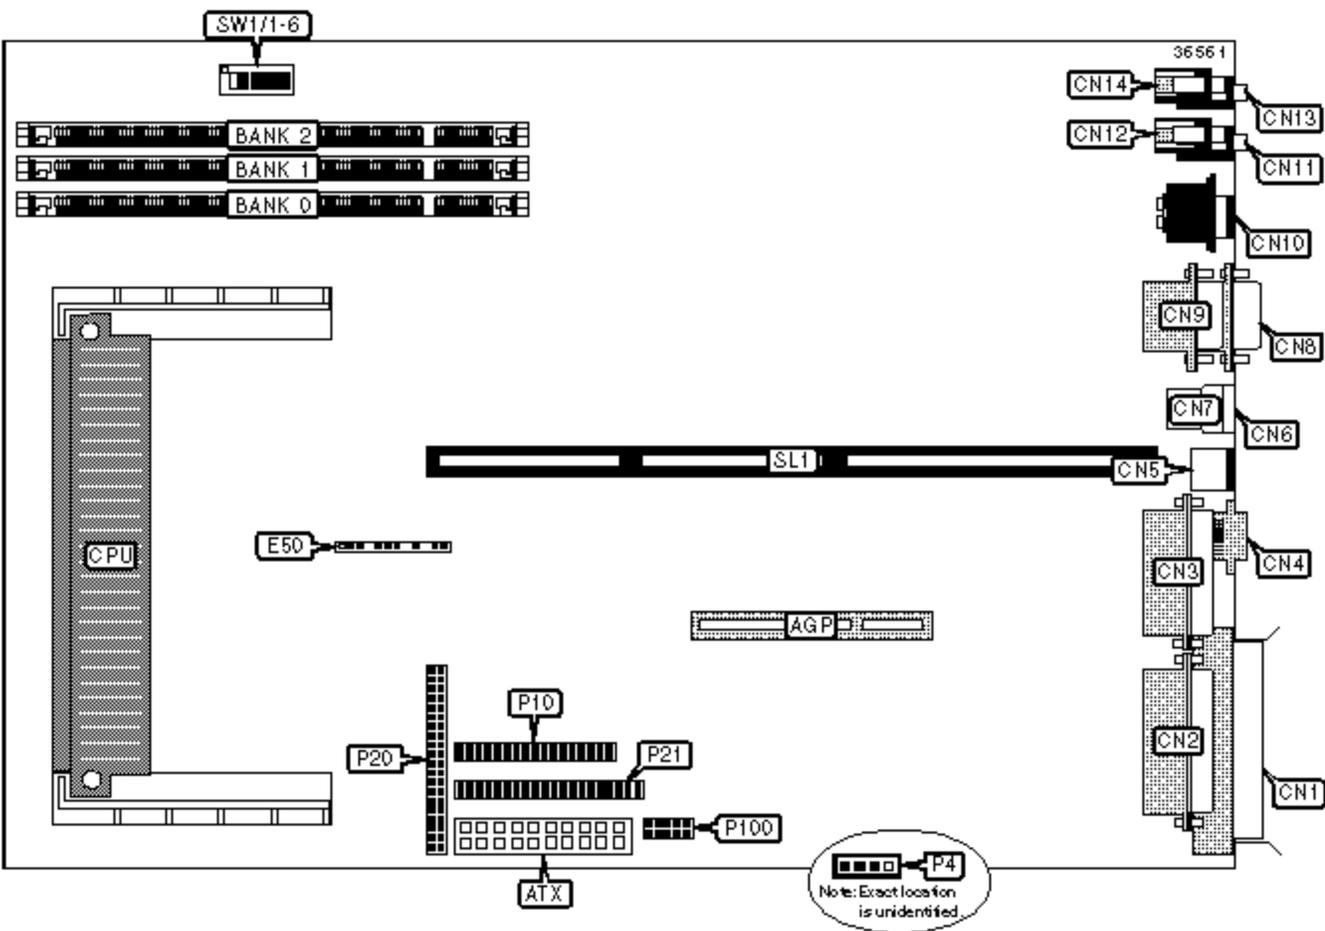

CONNECTIONS

Purpose	Location	Purpose	Location
AGP port	AGP	Headphone out	CN11
ATX power connector	ATX	Microphone in	CN12
SCSI port	CN1	Line out	CN13
Parallel port	CN2	Line in	CN14

AUI transceiver via DB-15	CN3	External battery connector	E50/Pins 9 - 12
RJ-45 UTP connector	CN4	Floppy drive interface	P10
IR connector	CN5	IDE 1 interface	P20
USB 1 connector	CN6	IDE 2 interface	P21
USB 2 connector	CN7	Power switch & selenoid	P100
Serial 1 port	CN8	CD-ROM audio in	P4
Serial 2 port	CN9	Riser slot	SL1
PS/2 mouse port	CN10		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	E50/Pins 5 & 6	Open
	Clear CMOS memory	E50/Pins 5 & 6	Closed
	Battery type select internal	E50	Pins 1 & 2 closed
	Battery type select external	E50	Pins 2 & 3 closed
	Enable power on password	SW1/1	On
	Disable power on password	SW1/1	Off
»	Factory configured - do not alter	SW1/5	Unidentified
»	Disable use of power strip to power up computer	SW1/6	Off
	Enable use of power strip to power up computer	SW1/6	On



SIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None

24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
136MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64

272MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

CPU SPEED SELECTION				
Speed	Clock Speed	SW1/2	SW1/3	SW1/4
233MHz	66MHz	Off	Off	On
266MHz	66MHz	On	On	Off
300MHz	66MHz	On	Off	On

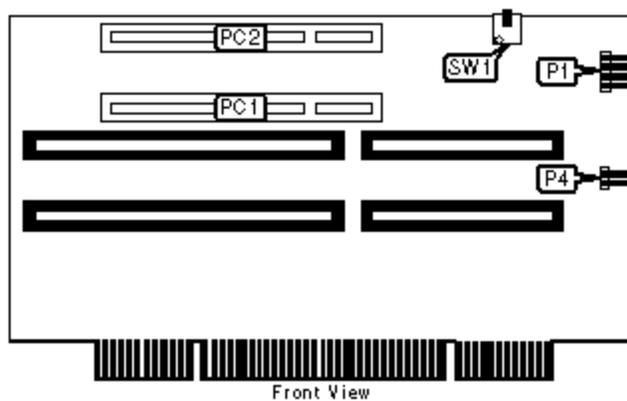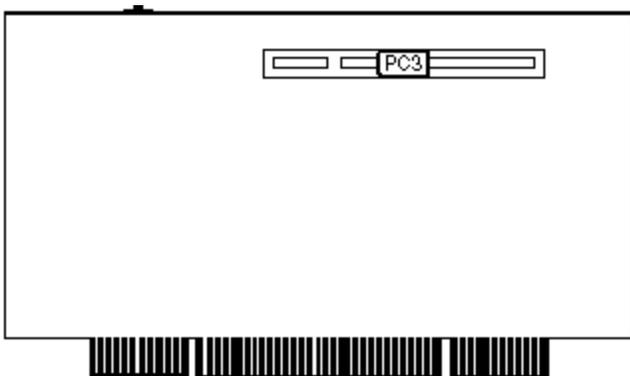


RISER BOARD FOR DESKTOP CASE

CONNECTIONS			
Purpose	Location	Purpose	Location
PC speaker connector	P1	32-bit PCI slots	PC1 - PC3
SCSI interface LED	P4		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
» Factory configured - do not alter	SW1	Unidentified



Rear View

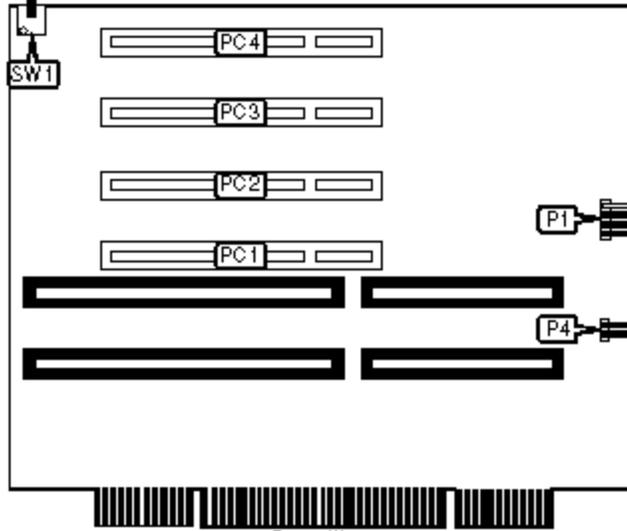

Front View

RISER BOARD FOR MINITOWER CASE

CONNECTIONS

Purpose	Location	Purpose	Location
PC speaker connector	P1	32-bit PCI slots	PC1 - PC4
SCSI interface LED	P4		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Factory configured - do not alter	SW1	Unidentified