


DIGITAL EQUIPMENT CORPORATION CELEBRIS XL, XL (DP)

Device Type	Mainboard
Processor	Pentium/Pentium Pro
Processor Speed	90/100/120/133/150/166MHz
Chip Set	Alpha AXP
Video Chip Set	None
Maximum Onboard Memory	512MB
Maximum Video Memory	None
Cache	256/512KB
BIOS	Unidentified
Dimensions	220mm x 220mm
I/O Options	32-bit PCI slots (3), IDE interface, floppy drive interface, CPU slot
NPU Options	None

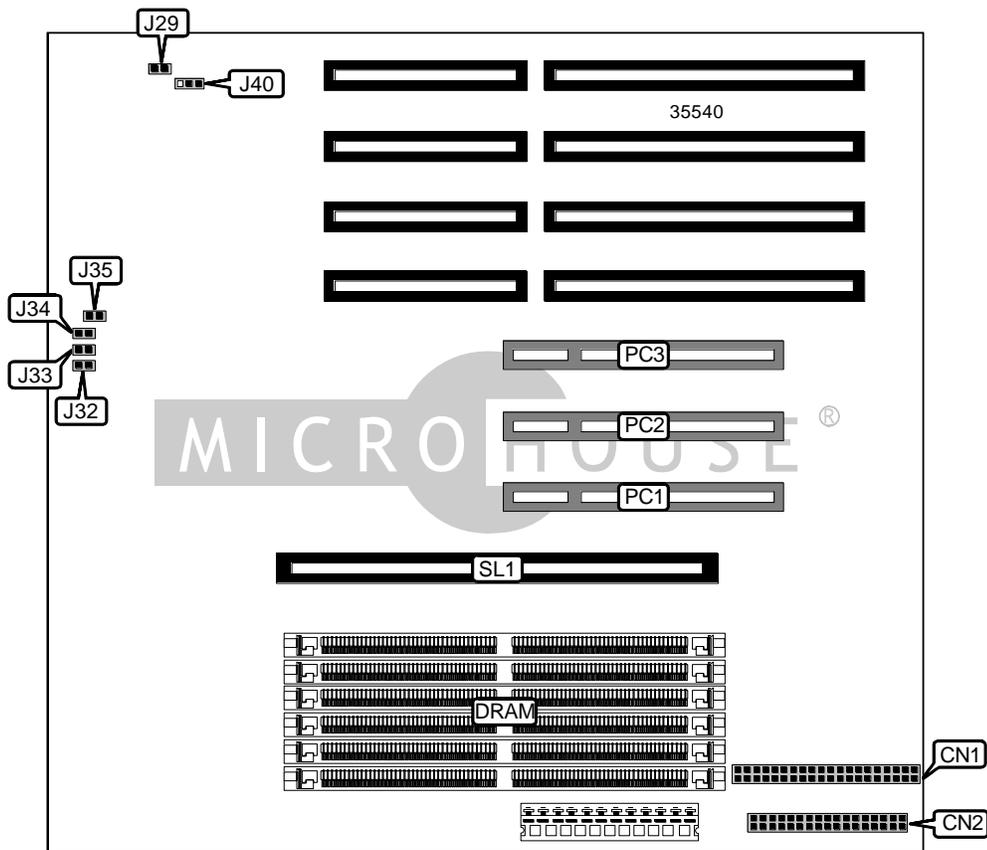

Continued on next page . . .

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS XL, XL (DP)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface	CN1	32-bit PCI slots	PC1 – PC3
Floppy drive interface	CN2	CPU slot	SL1

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í CMOS memory normal operation	J29	Open	
CMOS memory clear	J29	Closed	
í Password normal operation	J32	Open	
Password clear	J32	Closed	
í Monitor type select monochrome	J33	Open	
Monitor type select color	J33	Closed	
í Flash BIOS normal operation	J34	Open	
Flash BIOS recovery mode	J34	Closed	
í Flash BIOS upgrade enabled	J35	Closed	
Flash BIOS upgrade disabled	J35	Open	
í Boot block programming disabled	J40	Pins 1 & 2 closed	
Boot block programming enabled	J40	Pins 2 & 3 closed	

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 2M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
24MB	(2) 2M x 36	(2) 1M x 36	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None	None
32MB	(2) 2M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
36MB	(2) 8M x 36	None	None
36MB	(2) 4M x 36	(2) 2M x 36	(2) 2M x 36
36MB	(2) 4M x 36	(2) 4M x 36	None
40MB	(2) 4M x 36	(2) 1M x 36	None
40MB	(2) 2M x 36	(2) 2M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS XL, XL (DP)

... continued from previous page

SIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
48MB	(2) 4M x 36	(2) 2M x 36	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
56MB	(2) 4M x 36	(2) 2M x 36	(2) 1M x 36
72MB	(2) 8M x 36	(2) 1M x 36	None
72MB	(2) 4M x 36	(2) 4M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 1M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36	None
80MB	(2) 4M x 36	(2) 4M x 36	(2) 2M x 36
88MB	(2) 8M x 36	(2) 2M x 36	(2) 1M x 36
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
104MB	(2) 8M x 36	(2) 4M x 36	(2) 1M x 36
128MB	(2) 16M x 36	None	None
128MB	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
136MB	(2) 16M x 36	(2) 1M x 36	None
136MB	(2) 8M x 36	(2) 8M x 36	(2) 1M x 36
144MB	(2) 16M x 36	(2) 1M x 36	(2) 1M x 36
144MB	(2) 16M x 36	(2) 2M x 36	None
160MB	(2) 8M x 36	(2) 8M x 36	(2) 4M x 36
168MB	(2) 16M x 36	(2) 4M x 36	(2) 1M x 36
176MB	(2) 16M x 36	(2) 4M x 36	(2) 2M x 36
192MB	(2) 16M x 36	(2) 4M x 36	(2) 4M x 36
192MB	(2) 16M x 36	(2) 8M x 36	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
200MB	(2) 16M x 36	(2) 8M x 36	(2) 1M x 36
256MB	(2) 32M x 36	None	None
256MB	(2) 16M x 36	(2) 8M x 36	(2) 8M x 36
272MB	(2) 32M x 36	(2) 1M x 36	(2) 1M x 36
272MB	(2) 32M x 36	(2) 2M x 36	None
288MB	(2) 32M x 36	(2) 2M x 36	(2) 2M x 36
288MB	(2) 32M x 36	(2) 4M x 36	None
320MB	(2) 32M x 36	(2) 4M x 36	(2) 4M x 36

Continued on next page...

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS XL, XL (DP)

... continued from previous page

SIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
320MB	(2) 32M x 36	(2) 8M x 36	None
384MB	(2) 32M x 36	(2) 8M x 36	(2) 8M x 36
384MB	(2) 32M x 36	(2) 16M x 36	None
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36
512MB	(2) 32M x 36	(2) 16M x 36	(2) 16M x 36
512MB	(2) 32M x 36	(2) 32M x 36	None

Note: Maximum memory for the Pentium is 384MB.

CACHE CONFIGURATION
Note: 256/512KB cache is located on the CPU card.