


DTK COMPUTER, INC.

PAM-0052V (VER. 1.10)

| | |
|-------------------------------|---|
| Device Type | Mainboard |
| Processor | CX 6X86L/CX 6X86MX/IBM 6X86MX/CX MII/IDT C6/AM K5/AM K6/AM K6-2/Pentium/Pentium MMX |
| Processor Speed | 90/100/110/120/133/150/166/200/233/250/266/300/333/350MHz |
| Chip Set | VIA |
| Maximum Onboard Memory | 384MB (EDO & SDRAM supported) |
| Cache | 512KB |
| BIOS | Award |
| Dimensions | 220mm x 230mm |
| I/O Options | 32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, PS/2 mouse interface, serial ports (2), IR connector, USB interface, ATX power connector, AGP slot, Wake-on-LAN connector |

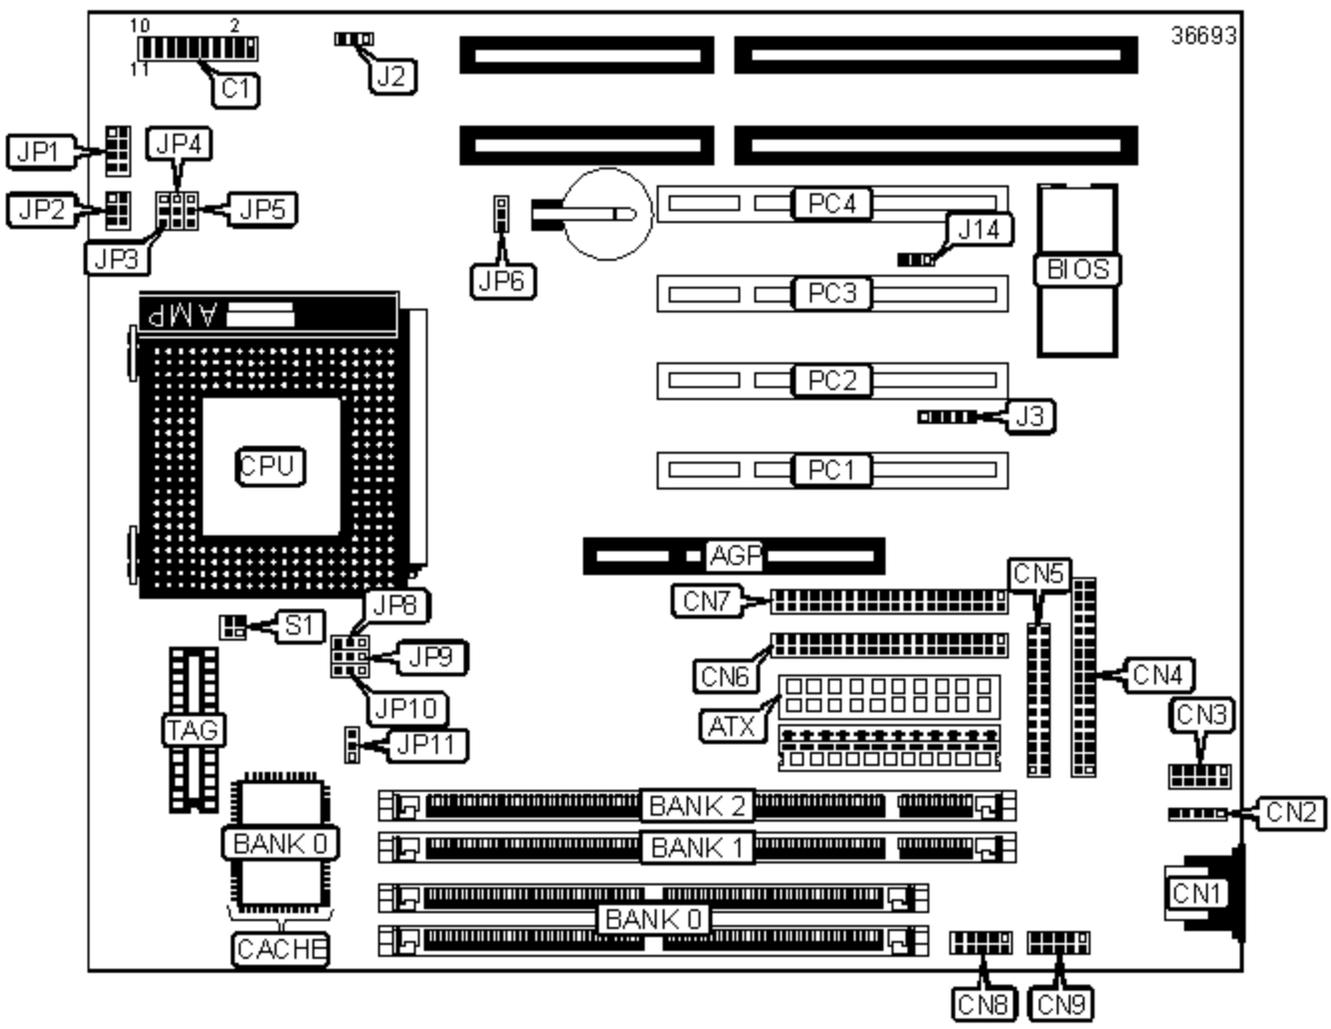

CONNECTIONS

| Purpose | Location | Purpose | Location |
|---------------------|---------------|------------------------|----------|
| AGP slot | AGP | Floppy drive interface | CN4 |
| ATX power connector | ATX | Parallel port | CN5 |
| IDE interface LED | C1/Pins 1 & 2 | IDE interface 2 | CN6 |
| | | | |

| | | | |
|----------------------|-----------------|-------------------------|-----------|
| Green PC LED | C1/Pins 3 & 4 | IDE interface 1 | CN7 |
| Power switch | C1/Pins 5 & 6 | Serial interface 1 | CN8 |
| Reset switch | C1/Pins 9 & 10 | Serial interface 2 | CN9 |
| Power LED & Keylock | C1/Pins 17 - 20 | CPU fan power connector | J2 |
| PC speaker | C1/Pins 12 - 15 | IR connector | J3 |
| PS/2 mouse port | CN1 | Power-on-ring connector | J14 |
| PS/2 mouse interface | CN2 | 32-bit PCI slots | PC1 - PC4 |
| USB interface | CN3 | | |

USER CONFIGURABLE SETTINGS

| Function | | Label | Position |
|----------|------------------------------|-------|-------------------|
| » | CMOS memory normal operation | JP6 | Pins 1 & 2 closed |
| | CMOS memory clear | JP6 | Pins 2 & 3 closed |

SIMM CONFIGURATION

| Size | Bank 0 |
|-------|--------------|
| 8MB | (2) 1M x 36 |
| 16MB | (2) 2M x 36 |
| 32MB | (2) 4M x 36 |
| 64MB | (2) 8M x 36 |
| 128MB | (2) 16M x 36 |

Note: Board accepts EDO memory.

DIMM CONFIGURATION

| Size | Bank 1 | Bank 2 |
|------|-------------|-------------|
| 8MB | (1) 1M x 64 | None |
| 16MB | (1) 1M x 64 | (1) 1M x 64 |
| 32MB | (1) 2M x 64 | None |

| | | |
|--|--------------|--------------|
| 16MB | (1) 2M x 64 | None |
| 24MB | (1) 2M x 64 | (1) 1M x 64 |
| 32MB | (1) 2M x 64 | (1) 2M x 64 |
| 32MB | (1) 4M x 64 | None |
| 40MB | (1) 4M x 64 | (1) 1M x 64 |
| 48MB | (1) 4M x 64 | (1) 2M x 64 |
| 64MB | (1) 4M x 64 | (1) 4M x 64 |
| 64MB | (1) 8M x 64 | None |
| 72MB | (1) 8M x 64 | (1) 1M x 64 |
| 80MB | (1) 8M x 64 | (1) 2M x 64 |
| 96MB | (1) 8M x 64 | (1) 4M x 64 |
| 128MB | (1) 8M x 64 | (1) 8M x 64 |
| 128MB | (1) 16M x 64 | None |
| 136MB | (1) 16M x 64 | (1) 1M x 64 |
| 144MB | (1) 16M x 64 | (1) 2M x 64 |
| 160MB | (1) 16M x 64 | (1) 4M x 64 |
| 192MB | (1) 16M x 64 | (1) 8M x 64 |
| 256MB | (1) 16M x 64 | (1) 16M x 64 |
| <p>Note: Board supports EDO & SDRAM memory. Note: It is not recommended to use SIMM and DIMM memory at the same time.</p> | | |

| SDRAM SPEED SELECTION | | | | | |
|-----------------------|------------|-------|-------|-------|-------|
| CPU Bus Speed | DRAM Speed | JP3 | JP4 | JP5 | JP11 |
| 100MHz | 100MHz | 2 & 3 | 2 & 3 | 1 & 2 | 1 & 2 |
| 100MHz | 66MHz | 2 & 3 | 1 & 2 | 1 & 2 | 2 & 3 |
| 95MHz | 95MHz | 2 & 3 | 2 & 3 | 1 & 2 | 1 & 2 |
| 95MHz | 63MHz | 2 & 3 | 1 & 2 | 1 & 2 | 2 & 3 |
| 83MHz | 83MHz | 1 & 2 | 2 & 3 | 1 & 2 | 1 & 2 |
| 83MHz | 66MHz | 1 & 2 | 1 & 2 | 1 & 2 | 2 & 3 |

| | | | | | |
|-------|-------|-------|-------|-------|-------|
| 75MHz | 75MHz | 1 & 2 | 2 & 3 | 2 & 3 | 1 & 2 |
| 75MHz | 60MHz | 1 & 2 | 1 & 2 | 2 & 3 | 2 & 3 |
| 66MHz | 66MHz | Open | 2 & 3 | 2 & 3 | 1 & 2 |
| 60MHz | 60MHz | Open | 2 & 3 | 2 & 3 | 1 & 2 |

Note: Designated pins should be in the closed position.

| CPU SPEED SELECTION (CX 6X86L) | | | | | | | | |
|--------------------------------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
| 150MHz | 60MHz | 2x | Closed | Open | Open | 2 & 3 | 2 & 3 | 2 & 3 |
| 166MHz | 66MHz | 2x | Closed | Open | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 200MHz | 75MHz | 2x | Closed | Open | Open | 1 & 2 | 1 & 2 | 2 & 3 |

Note: Designated pins should be in the closed position.

| CPU SPEED SELECTION (CX 6X86MX) | | | | | | | | |
|---------------------------------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
| 166MHz | 60MHz | 2.5x | Closed | Closed | Open | 2 & 3 | 2 & 3 | 2 & 3 |
| 200MHz | 75MHz | 2x | Closed | Open | Open | 1 & 2 | 1 & 2 | 2 & 3 |
| 200MHz | 66MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 233MHz | 75MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 1 & 2 | 2 & 3 |
| 233MHz | 66MHz | 3x | Open | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |

Note: Designated pins should be in the closed position.

| CPU SPEED SELECTION (CX MII) | | | | | | | | |
|------------------------------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
| 300MHz | 75MHz | 3x | Open | Closed | Open | 1 & 2 | 1 & 2 | 2 & 3 |
| 300MHz | 66MHz | 3.5x | Open | Open | Open | 1 & 2 | 2 & 3 | 2 & 3 |

| | | | | | | | | |
|--------|--------|------|--------|--------|------|-------|-------|-------|
| 333MHz | 100MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 1 & 2 | 1 & 2 |
| 333MHz | 83MHz | 3x | Open | Closed | Open | 1 & 2 | 2 & 3 | 1 & 2 |
| 350MHz | 100MHz | 3x | Open | Closed | Open | 1 & 2 | 1 & 2 | 1 & 2 |

Note: Designated pins should be in the closed position.

CPU SPEED SELECTION (IBM 6X86MX)

| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
|-----------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| 266MHz | 83MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 2 & 3 | 1 & 2 |

Note: Designated pins should be in the closed position.

CPU SPEED SELECTION (IDT C6)

| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
|-----------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| 180MHz | 60MHz | 3x | Open | Closed | Open | 2 & 3 | 2 & 3 | 2 & 3 |
| 200MHz | 66MHz | 3x | Open | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |

Note: Designated pins should be in the closed position.

CPU SPEED SELECTION (AM K5)

| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
|-----------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| 120MHz | 60MHz | 2x | Closed | Open | Open | 2 & 3 | 2 & 3 | 2 & 3 |
| 133MHz | 66MHz | 2x | Closed | Open | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 166MHz | 66MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |

Note: Designated pins should be in the closed position.

CPU SPEED SELECTION (AM K6)

| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
|-----------|-------------|------------|-----------|-----------|-----------|-----|-----|------|
|-----------|-------------|------------|-----------|-----------|-----------|-----|-----|------|

| | | | | | | | | |
|--------|-------|------|--------|--------|--------|-------|-------|-------|
| 166MHz | 66MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 200MHz | 66MHz | 3x | Open | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 233MHz | 66MHz | 3.5x | Open | Open | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 266MHz | 66MHz | 4x | Closed | Open | Closed | 1 & 2 | 2 & 3 | 2 & 3 |
| 300MHz | 66MHz | 4.5x | Closed | Closed | Closed | 1 & 2 | 2 & 3 | 2 & 3 |

Note: Designated pins should be in the closed position.

CPU SPEED SELECTION (AM K6-2)

| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
|-----------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| 250MHz | 100MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 1 & 2 | 1 & 2 |
| 266MHz | 66MHz | 4x | Closed | Open | Closed | 1 & 2 | 2 & 3 | 2 & 3 |
| 300MHz | 100MHz | 3x | Open | Closed | Open | 1 & 2 | 1 & 2 | 1 & 2 |
| 333MHz | 95MHz | 3.5x | Open | Open | Open | 2 & 3 | 1 & 2 | 1 & 2 |
| 350MHz | 100MHz | 3.5x | Open | Open | Open | 1 & 2 | 1 & 2 | 1 & 2 |

Note: Designated pins should be in the closed position.

CPU SPEED SELECTION (PENTIUM)

| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
|-----------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| 90MHz | 60MHz | 1.5x | Open | Open | Open | 2 & 3 | 2 & 3 | 2 & 3 |
| 100MHz | 66MHz | 1.5x | Open | Open | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 120MHz | 60MHz | 2x | Closed | Open | Open | 2 & 3 | 2 & 3 | 2 & 3 |
| 133MHz | 66MHz | 2x | Closed | Open | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 150MHz | 60MHz | 2.5x | Closed | Closed | Open | 2 & 3 | 2 & 3 | 2 & 3 |
| 166MHz | 66MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 200MHz | 66MHz | 3x | Open | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |

Note: Designated pins should be in the closed position.

CPU SPEED SELECTION (PENTIUM MMX)

| CPU speed | Clock speed | Multiplier | JP2/1 & 2 | JP2/3 & 4 | JP2/5 & 6 | JP8 | JP9 | JP10 |
|-----------|-------------|------------|-----------|-----------|-----------|-------|-------|-------|
| 166MHz | 66MHz | 2.5x | Closed | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 200MHz | 66MHz | 3x | Open | Closed | Open | 1 & 2 | 2 & 3 | 2 & 3 |
| 233MH | 66MHz | 3.5x | Open | Open | Open | 1 & 2 | 2 & 3 | 2 & 3 |

Note: Designated pins should be in the closed position.

CPU VOLTAGE SELECTION (SINGLE)

| Voltage | JP1/Pins 1 & 2 | JP1/Pins 3 & 4 | JP1/Pins 5 & 6 | JP1/Pins 7 & 8 | S1/Pins 1 & 2 | S1/Pins 3 & 4 |
|---------|----------------|----------------|----------------|----------------|---------------|---------------|
| 3.3V | Closed | Closed | Open | Closed | Open | Open |
| 3.5V | Closed | Closed | Closed | Closed | Open | Open |

CPU VOLTAGE SELECTION (DUAL)

| Voltage | JP1/Pins 1 & 2 | JP1/Pins 3 & 4 | JP1/Pins 5 & 6 | JP1/Pins 7 & 8 | S1/Pins 1 & 2 | S1/Pins 3 & 4 |
|-----------|----------------|----------------|----------------|----------------|---------------|---------------|
| 3.3V/2.2V | Open | Open | Closed | Open | Closed | Closed |
| 3.3V/2.8V | Closed | Open | Open | Open | Closed | Closed |
| 3.3V/2.9V | Closed | Open | Open | Closed | Closed | Closed |
| 3.3V/3.2v | Closed | Closed | Open | Open | Closed | Closed |